

64 KBPS INTERFACE TRANSFORMERS

Designed for G.703 Codirectional Interface





- Single and dual transformer modules for ITU G.703 codirectional applications
- Transformers matched to the integrated circuit
- Provide 1500 Vrms minimum isolation



Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

Part Number	Turns Ratio (±3%)	OCL (mH MIN)	LL (μH MAX)	Cw/w (pF MAX)	DCR pri (Ω MAX)	DCR sec (Ω MAX)	Package/ Schematic	Matched To
PE-65535NL	1:2CT	20.0	5.0	130	2.65	5.0	IS/5	EXAR XR6164 XR-T6165, XR-T6166
PE-65540NL	1CT:1	10.0	5.0	100	2.60	2.6	IS/6	—
T7015NL	1:2CT & 1:2CT	20.0	5.0	130	2.80	5.6	AN/1	—

Mechanicals

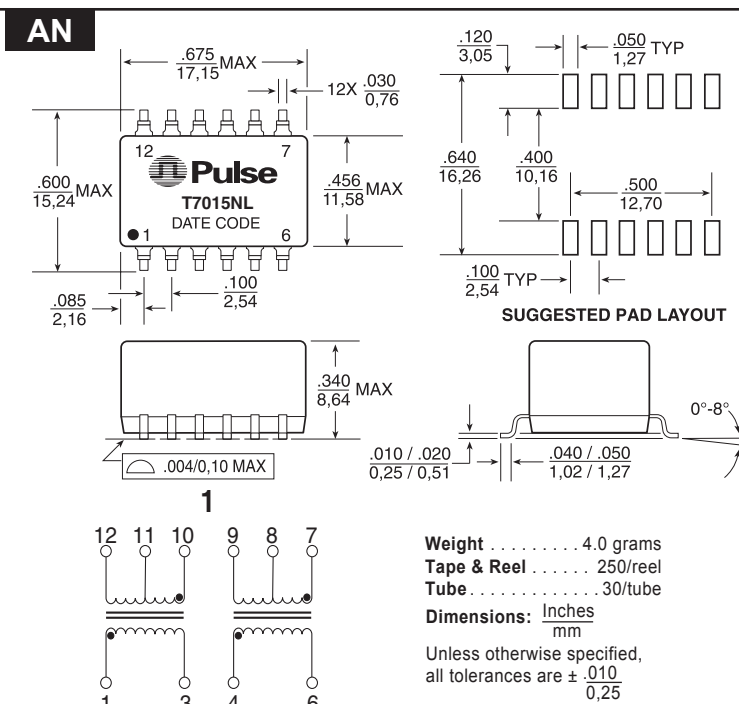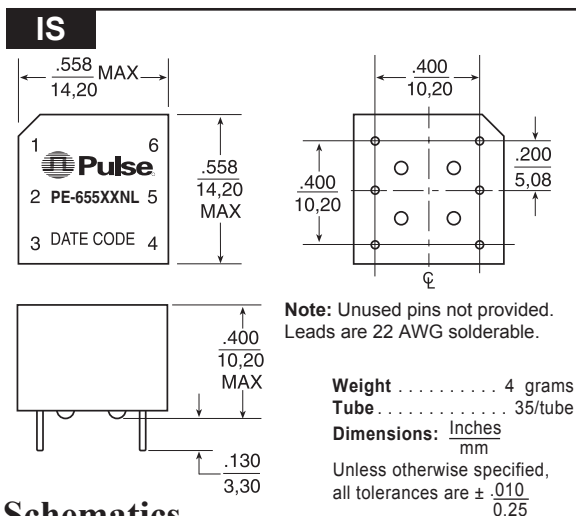

Schematics

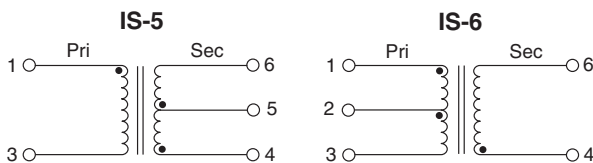

The CCITT recommendations G.703 describe the physical and electrical characteristics of digital interfaces at 64 Kbps. PE-65535NL listed above has been designed for the codirectional interface and matches the driver/receiver chips from EXAR

(XR6164, XR-T6165, and XR-T6166). The characteristics of these transformers allow the pulse to comply with the pulse masks in the 120 Ω system.

For More Information :

Pulse Worldwide Headquarters

12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

www.pulseeng.com

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 7806 0
Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Rd.
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057

Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Rd. West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Rd.
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F, No. 198
Zhongyuan Rd.
Zhongli City
Taoyuan County 320
Taiwan R. O. C.

Tel: 886 3 4356768
Fax: FRE 886 3 4356820
Pulse: 886 3 4356823

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

Printed on recycled paper. ©2010, Pulse Engineering, Inc.

T611.D (9/10)