

AVD100 Series

100 - 120 Watts

Data Sheet

Total Power: 100 - 120 Watts

Input Voltage: 36 - 75 V


of Outputs: Single

SPECIAL FEATURES

- 2:1 wide input range
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Pre-bias start-up capability
- Basic insulation system
- Through-hole or SMT termination
- Openframe structure with Baseplate option
- Output over current protection

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950

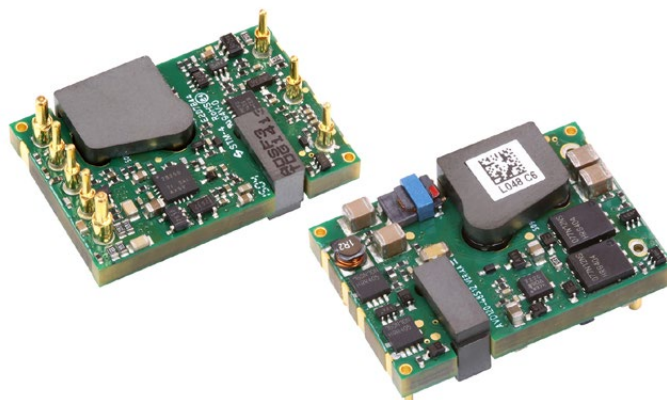

Electrical Specifications

Input	
Input range	36 - 75 Vdc
Efficiency	5 V: 92.5% @ full load; 93.5% @ half load
Output	
Voltage tolerance	±1.5%
Line regulation	0.2%
Load regulation	Single output: 0.5%
Noise/ripple	120 mV
Overvoltage protection Overtemperature protection	Auto-restart
Switching frequency	250 KHz
Temperature co-efficient	±0.02 /°C
Isolation	
I/O isolation	1500 Vdc min.

Specifications

Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	2 Million hours
RoHS compliant	

Ordering Information

Model number	Input voltage	Output voltage	Power
AVD100-48S05-6L	36 - 75 V _{in}	5 V @ 20 A	100 W
AVD100-48S05B-6L	36 - 75 V _{in}	5 V @ 20 A	100 W
AVD100-48S05TL	36 - 75 V _{in}	5 V @ 20 A	100 W
AVD120-48S12-6L	36 - 75 V _{in}	12 V @ 10 A	120 W
AVD120-48S12B-6L	36 - 75 V _{in}	12 V @ 10 A	120 W
AVD120-48S12TL	36 - 75 V _{in}	12 V @ 10 A	120 W

Notes:

Standard version is negative enable

"T" = Surface mount, reel tape package

"-6" = 3.8 mm pin length


"L" = RoHS 6 compliance

"B" = Baseplate version


"P" = Positive enable

Mechanical Drawings

Baseplate option

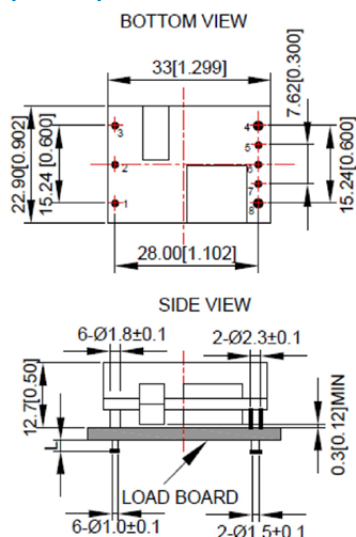

Open frame option

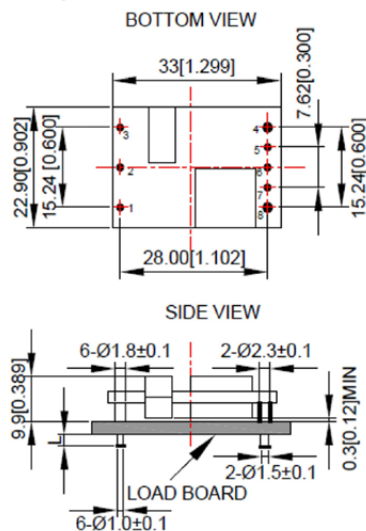


UNIT: mm[inch]

BOTTOM VIEW: pin on upside

TOLERANCE: X.Xmm±0.5mm[X.XX in.±0.02in.]

X.XXmm±0.25mm[X.XXX in.±0.01in.]

SMT option

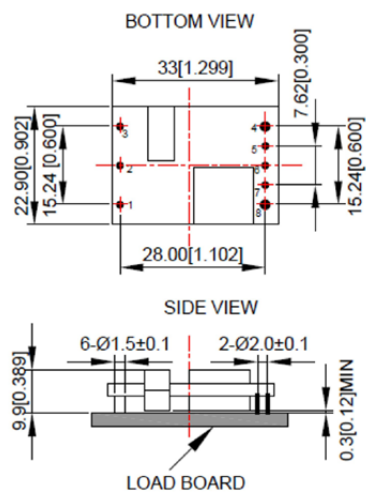

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

Pin Assignments

Pin #	Function
1	+V in
2	Remote On/Off
3	-V in
4	-V out
5	- Sense
6	Trim
7	+Sense
8	+V out

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333



www.artesyn.com

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com