

Fuse plug - P-FU 5X20 - 3036806

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Fuse plug, Nominal current: 6.3 A, Length: 28 mm, Width: 6.2 mm, Height: 25 mm, Color: black

Product Features

- ✓ Large-surface labeling option
- ✓ Test contacts on both sides of the fuse
- ✓ Versions with bipolar defect indicator
- ✓ Can be used for overload/short-circuit protection



Key commercial data

Packing unit	1 PCE
Minimum order quantity	10 PCE
GTIN	 4 017918 943899
Custom tariff number	85366990
Country of origin	POLAND

Technical data

General

Note	Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block.
Color	black
Insulating material	PA
Inflammability class according to UL 94	V0
Fuse	G / 5 x 20
Nominal current I_N	6.3 A
Nominal voltage U_N	500 V (if used as fuse terminal block)

Fuse plug - P-FU 5X20 - 3036806

Technical data

General

	500 V (if used as disconnect terminal block)
Temperature index, insulating material (DIN EN 60216-1 (VDE 0304-21))	130 °C

Dimensions

Width	6.2 mm
Length	28 mm

Classifications

eCl@ss

eCl@ss 4.0	27141199
eCl@ss 4.1	27141199
eCl@ss 5.0	27141145
eCl@ss 5.1	27141145
eCl@ss 6.0	27141149
eCl@ss 7.0	27141149
eCl@ss 8.0	27141149

ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC002018
ETIM 5.0	EC002018

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Approvals

Approvals

Approvals

CSA

Fuse plug - P-FU 5X20 - 3036806

Approvals

Ex Approvals


Approvals submitted

Approval details

CSA 	
Nominal current I _N	10 A
Nominal voltage U _N	300 V

Drawings


Application drawing

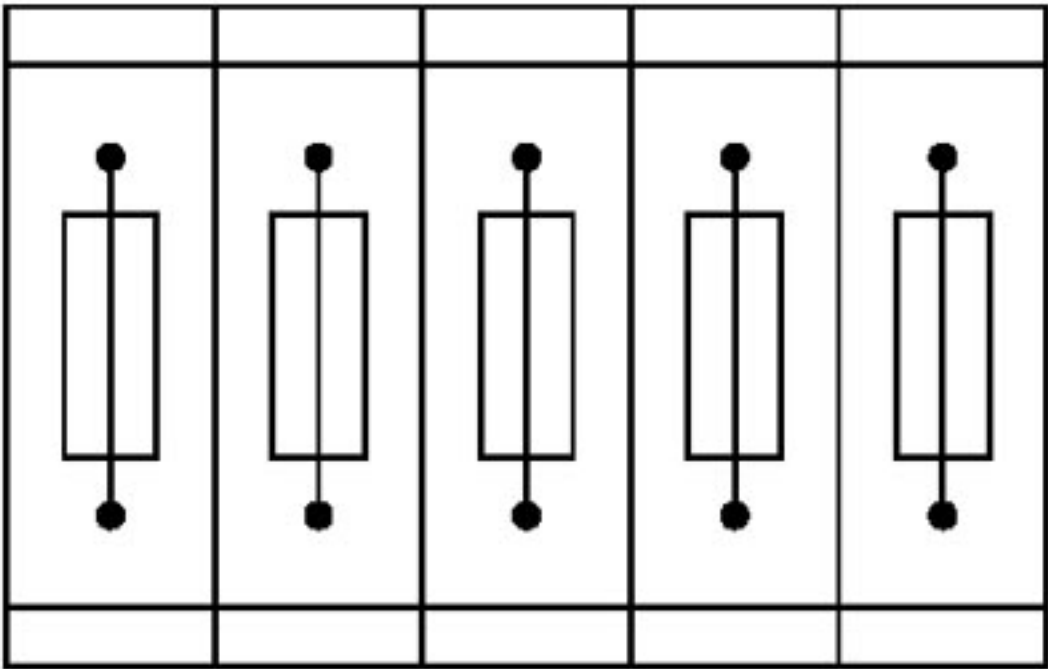

Fuse terminal blocks in interconnected arrangement,
block consisting of 5 fuse terminal blocks

Fuse plug - P-FU 5X20 - 3036806

Application drawing

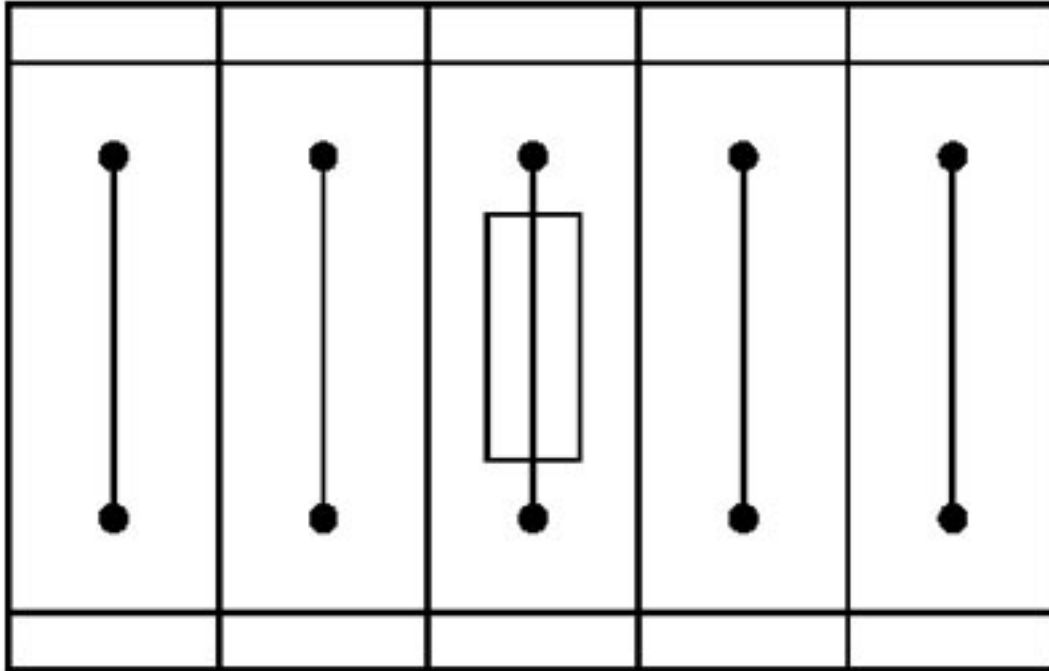

Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks