
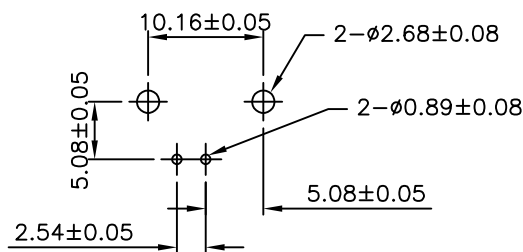

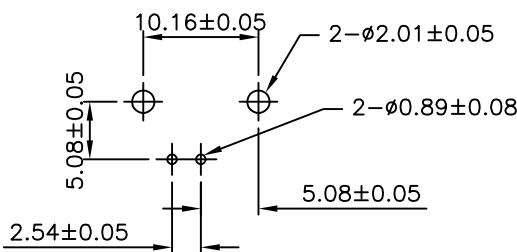
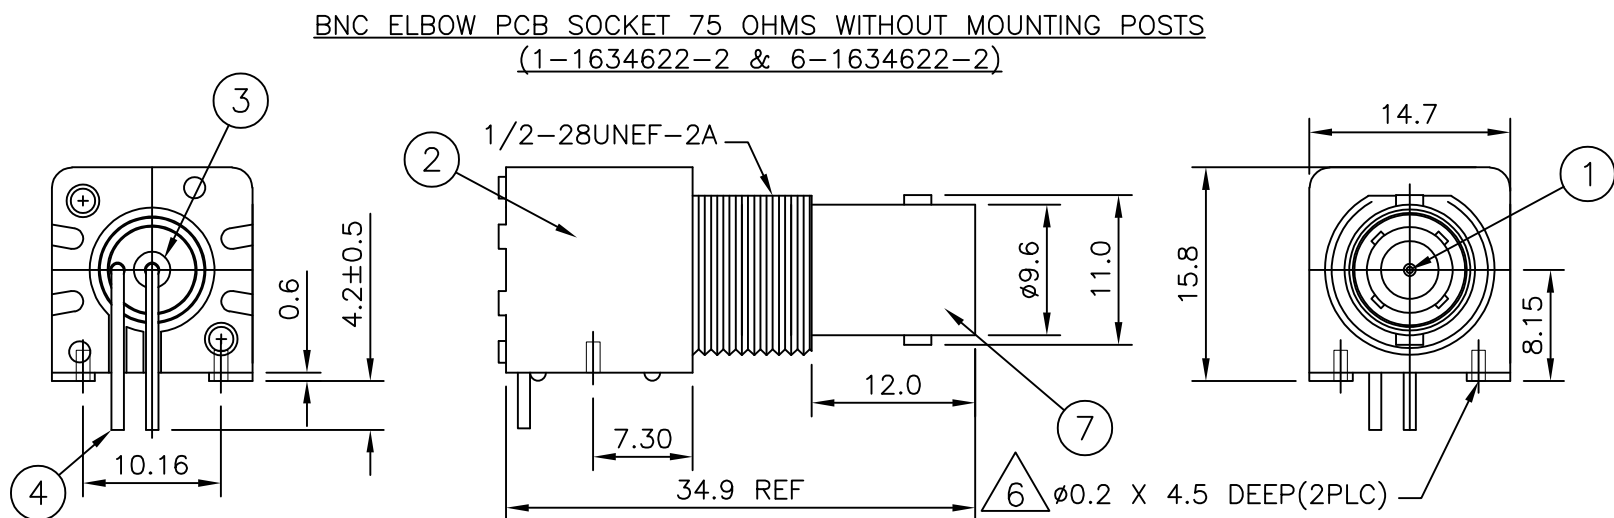
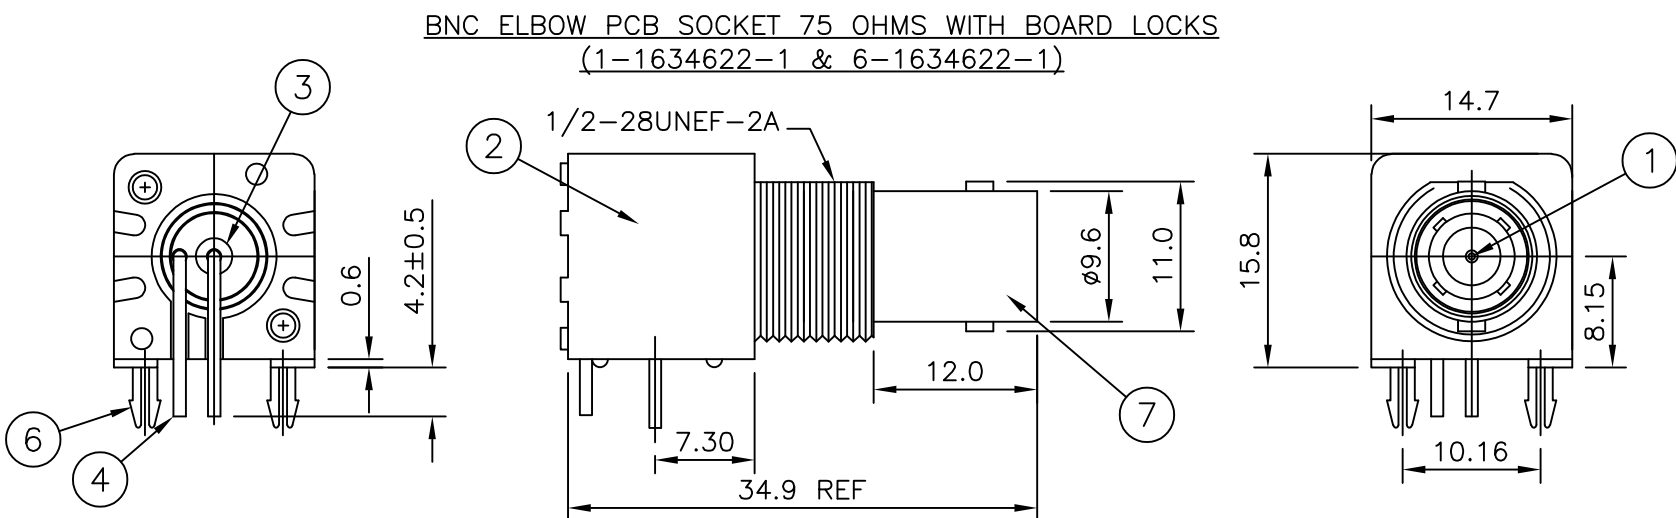
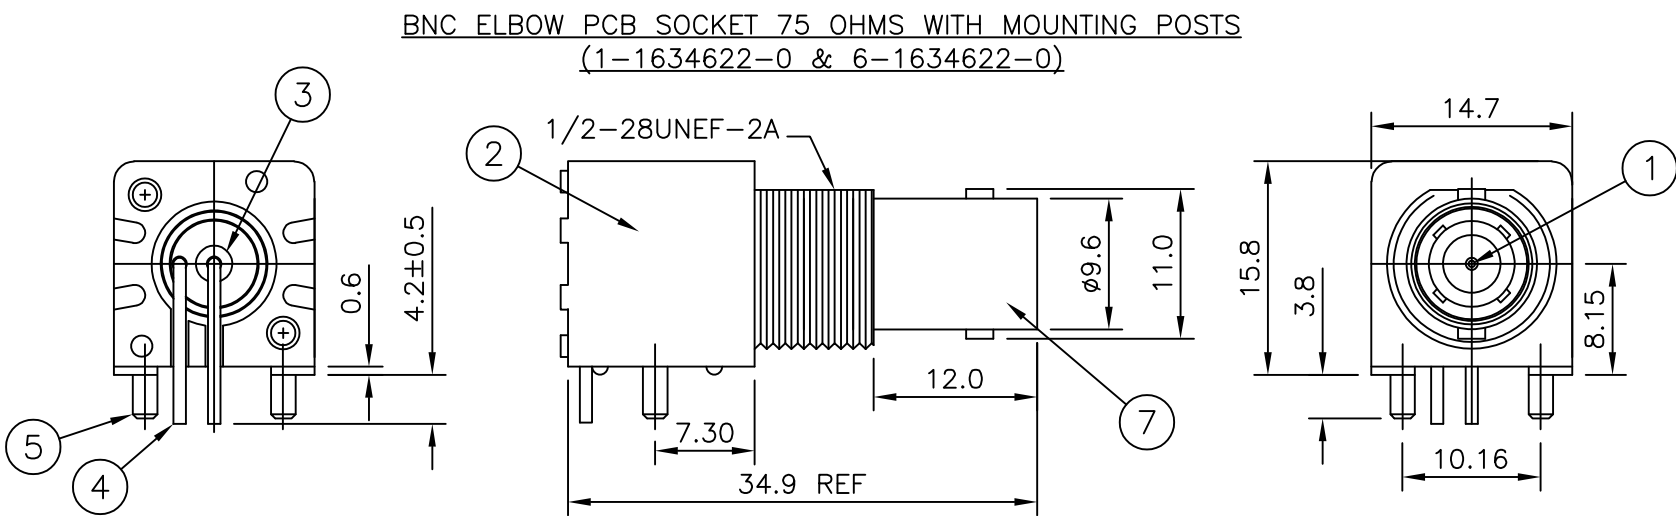


1. SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
2. 50 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
3. GOLD PLATING
4. NICKEL PLATING
5. TIN PLATING
6. RECOMMENDED SELF-TAPPING SCREW 221108-4
7. RECOMMENDED MOUNT NUT 1-1634816-0
8. RECOMMENDED LOCKWASHER 1-1634817-0
9. FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE
10. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.SANDWELL 17AUG05 CHK S.PARLOW 17AUG05 APVD F.WHEELER-KING 17AUG05		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.5 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME BNC R/A INSULATED PCB SOCKET 75 OHM BLACK -	
		PRODUCT SPEC 108-112000 APPLICATION SPEC -			
MATERIAL SEE TABLE		FINISH SEE TABLE			
		WEIGHT -		SIZE A2 CAGE CODE 00779 DRAWING NO C-1634622 RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE NTS SHEET 1 of 1 REV E1	