




TERMINALS & SPLICES

QUICK DISCONNECTS

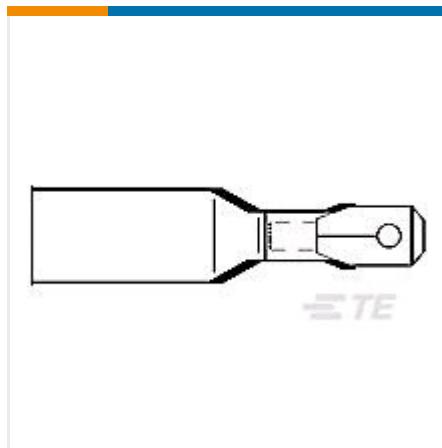

✓ Active

TE CONNECTIVITY (TE)

B-106-4631CS100

Raychem | CAP , CRPS

CC2630-000

TE Internal Number: CC2630-000

Not Yet Reviewed for EU RoHS

Not Yet Reviewed for EU ELV

Terminal Type Tab

Wire Size (AWG) 22 – 18

Wire Size (mm²) .3 – .9

Mating Tab Width 6.35 mm [.25 in]

Mating Tab Thickness .81 mm [.032 in]

PRODUCT DRAWING
English

DOCUMENTATION

Product Drawings

Duraseal Blade Terminal

PDF

English

Catalog Pages/Data Sheets

1654025_Sec8_B-106

PDF

English

Product Specifications

Product Specification

Installation Procedure For Duraseal Splices And Terminals

PDF

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Terminates To Wire & Cable

FASTON No

Insulated Wire Support No

Disconnect Type Quick Disconnect Pin

Insulated Yes

Wire/Cable Type Regular Wire

Wire Stop No

Wire/Cable Composition Stranded

Configuration Features

Connection Capacity Single

Body Features

Fully Insulated Yes

Plating Material Tin

Insulation Material Polyamide

Contact Features

Terminal Type Tab

Terminal Orientation Straight

Dimensions

Wire Size (AWG) 22 – 18

Wire Size (mm²) .3 – .9

Mating Tab Width 6.35 mm [.25 in]

Mating Tab Thickness .81 mm [.032 in]

Wire Insulation Diameter (Max) 4 mm [.157 in]

Overall Length 32 mm [1.26 in]

Usage Conditions

Operating Temperature Range (°C) 125

Packaging Features

Packaging Method Bag

Packaging Quantity 100

Other

Barrel Color Red

Statement of Compliance

Statement of Compliance

PDF
