




FCIconnect.com

Copyright FCI

NOTE:-
1. THE "LF" PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
2. LEAD FREE OR RoHS DIRECTIVE LABELLING TO BE PROVIDED AS PER GS-14-920 FOR LEAD FREE VERSION.

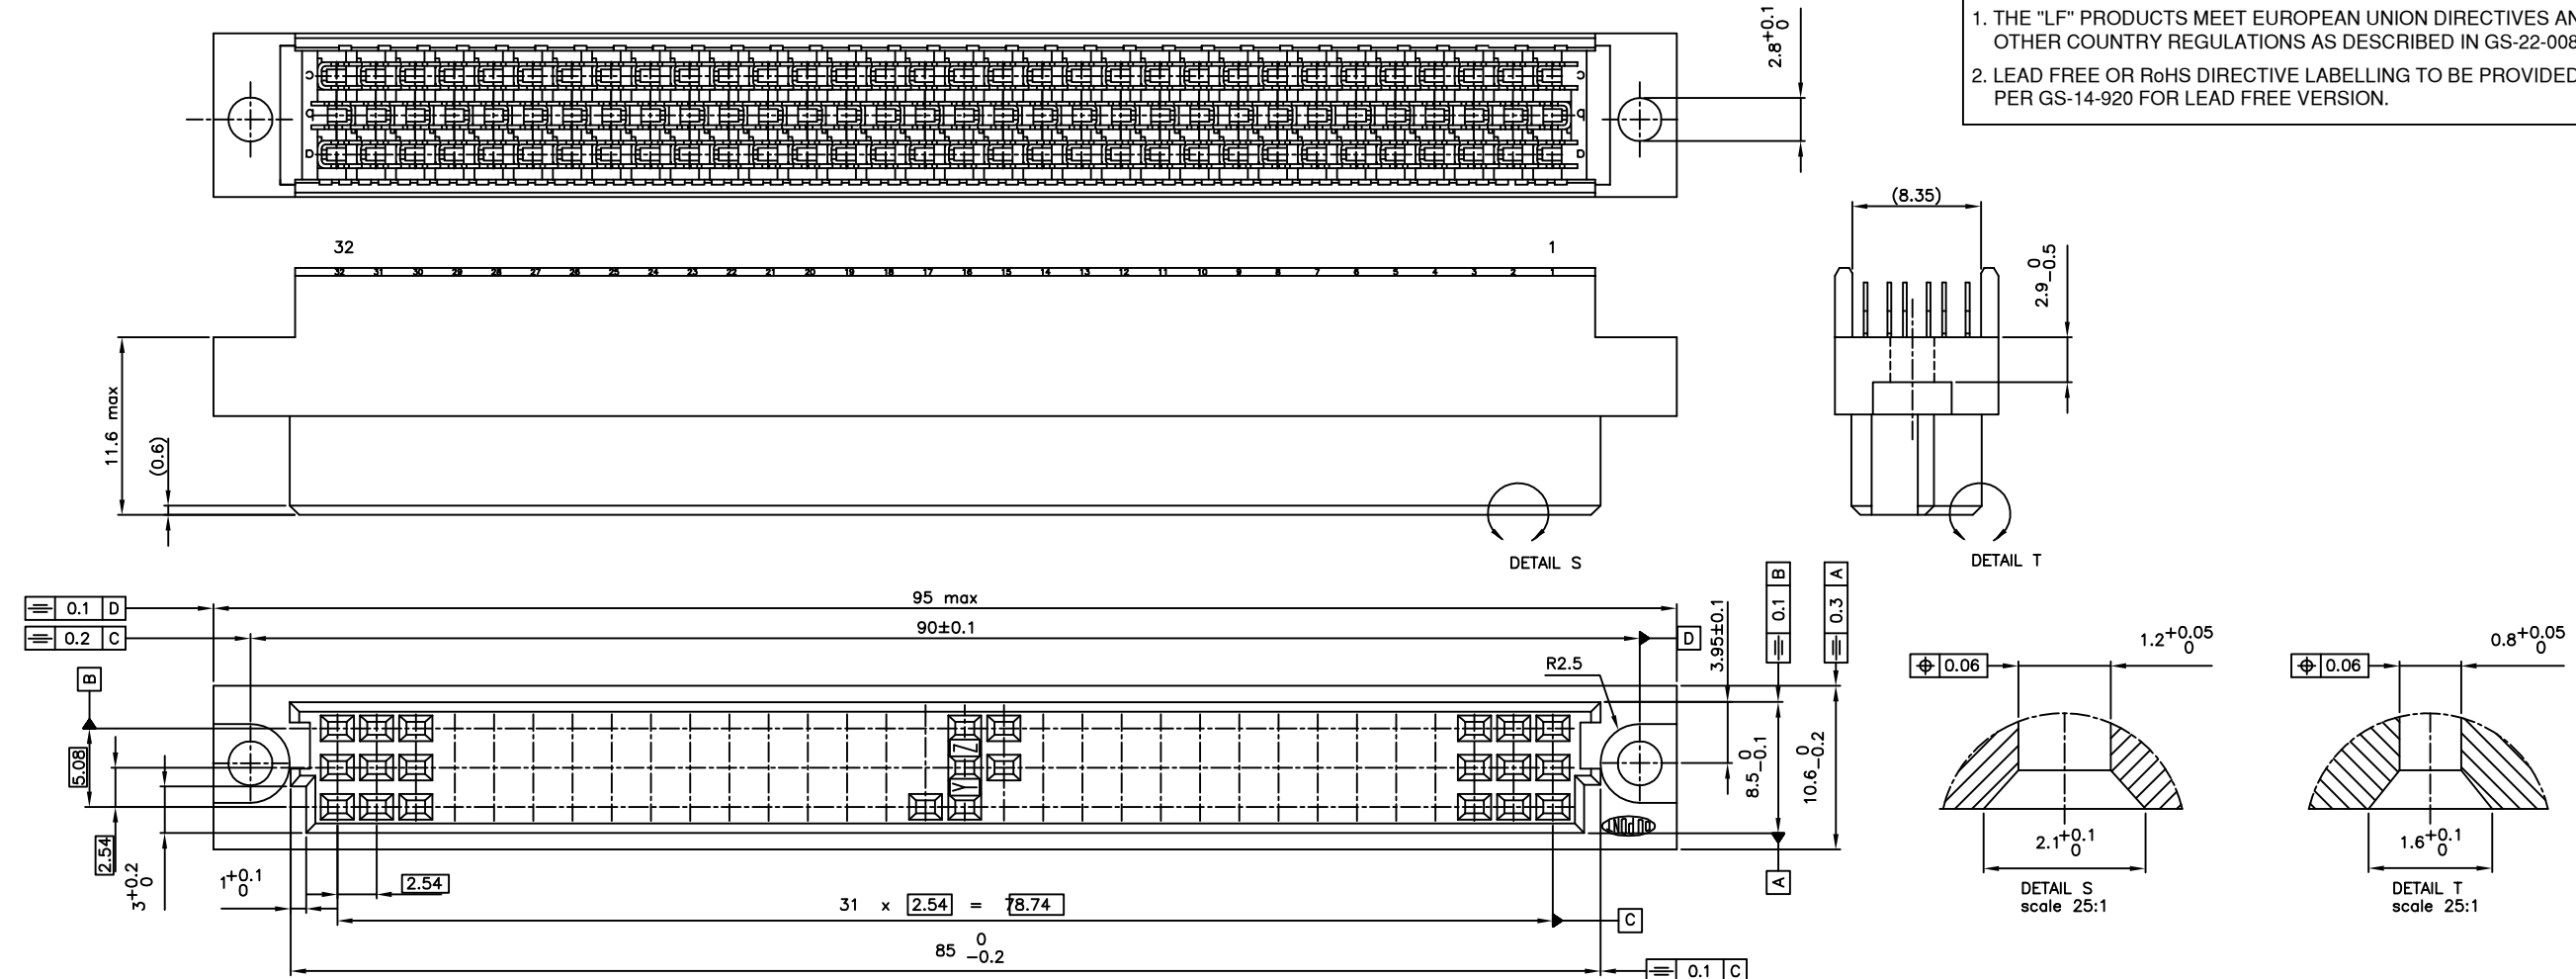

PRODUCT NR	TERMINAL X PLACED IN POSITION																																AWG SIZE	PLATING			
	ROW	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31		32	CONTACT AREA	PIERCING AREA	
77722-001	a	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	26	1.0µmAu min over 3.0µmNi	0.1-0.2µmNi	
	b	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			
	c																																				
77722-002	a	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	30	1.0µmAu min over 3.0µmNi	0.1-0.2µmNi	
	b	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			
	c	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			
77722-003	a																																		26	1.0µmAu min over 3.0µmNi	0.1-0.2µmNi
	b																																				
	c	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			
77722-004	a	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	26	1.0µmAu min over 3.0µmNi	0.1-0.2µmNi	
	b	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			
	c	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			
77722-005	a	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	26	1.0µmAu min over 3.0µmNi	0.1-0.2µmNi	
	b	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			
	c																																				
77722-006	a	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	30	3.0µmAu min over 3.0µmNi	GOLDFLASH	
	b	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			
	c	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			
77722-007	a	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	30	1.0µmAu min over 3.0µmNi	0.1-0.2µmNi	
	b	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			
	c	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			
77722-008	a	x			x		x		x		x		x		x		x		x		x		x		x		x		x		x		x	26	1.0µmAu min over 3.0µmNi	0.1-0.2µmNi	
	b	x			x		x		x		x		x		x		x		x		x		x		x		x		x		x		x	x			
	c	x			x		x		x		x		x		x		x		x		x		x		x		x		x		x		x	x			
77722-009	a	x			x		x		x		x		x		x		x		x		x		x		x		x		x		x		x	26	0.5µmAu min over 3.0µmNi	0.1-0.2µmNi	
	b	x			x		x		x		x		x		x		x		x		x		x		x		x		x		x		x	x			
	c	x			x		x		x		x		x		x		x		x		x		x		x		x		x		x		x	x			
77722-010	a	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	26	0.5µmAu min over 3.0µmNi	0.1-0.2µmNi	
	b	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			
	c	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			
	a																																				
	b																																				
	c																																				

NOTES:
1.MATERIAL HOUSING: THERMOPLASTIC POLYESTER 30% GLASS FILLED, COLOUR: GREY, FLAME RETARDANT PER UL-94-V0
2.MATERIAL CONTACT: PHOSPHOR BRONZE
3.CODE YZ ON LEAD IN SIDE OF HOUSING APPLIES TO PIERCING TERMINAL IN RELATION TO AWG SIZE
4.FOR CABLE APPLICATION SEE TA 301
5.THIS CONNECTOR CAN BE MATED WITH 3 ROW MALE CONNECTOR CONFORM DIN 41612 - TYPE C AND TYPE R
6."LF" SUFFIX TO THE PRODUCT NUMBER FOR LEAD FREE OR RoHS COMPATIBLE PRODUCTS.

mat'l. code SEE NOTE & TABLE				surface ISO 1302	tolerance ISO 406 ISO 1101	projection mm	product family BACKPANEL			
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm	title CABLE CONNECTOR ASSEMBLY 3x32 POS.			
A	H20166	MVI	1992-03-31	angles	linear					
B	I05-0138	MINI	2005-08-08				dwg no 77722			
C	I06-0082	MINI	2006-06-01							
				dr	M.Visschers	1992-03-31	sheet 1 of 1 size A3			
				enr						
				chr	RAKHEE GEORGE	2006-06-01	type Product Customer Drawing			
				appd	RAKHEE GEORGE	2006-06-01				
sheet index	revision sheet	C	1							