





4

3

2


1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	FI	REV.BY ECO 16-003733	11MAR2016	HC	WLS

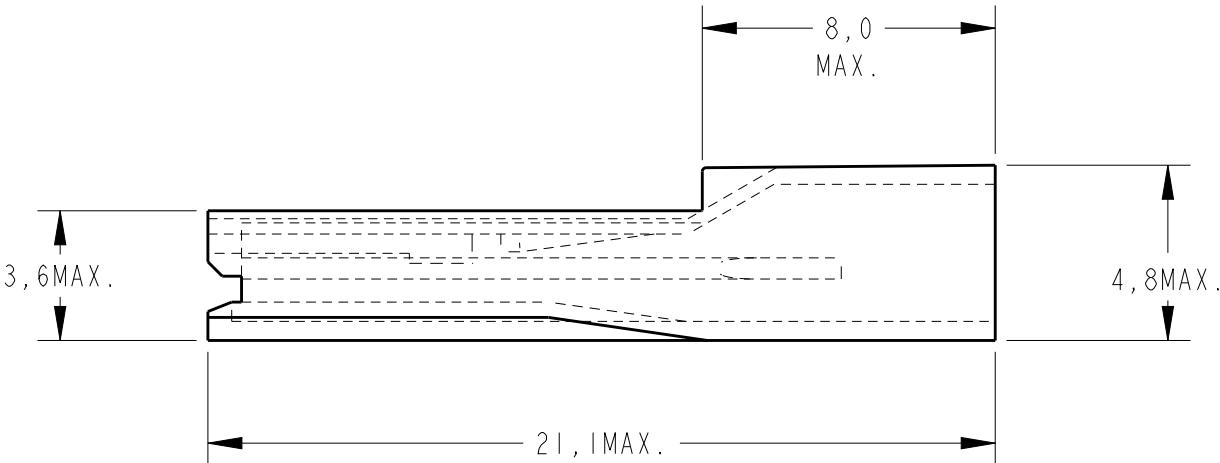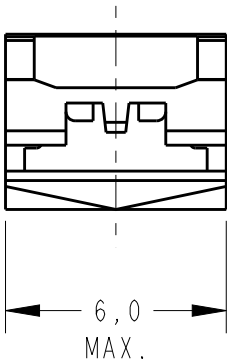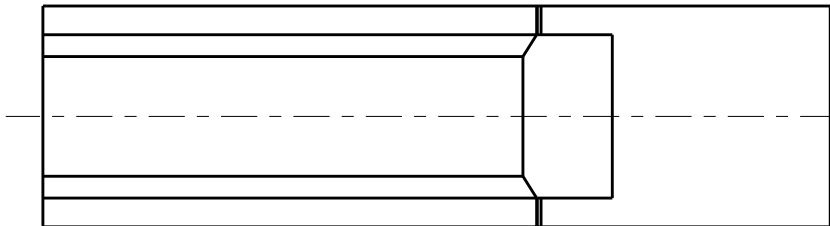

 -MATÉRIA PRIMA CONFORME ESPECIFICAÇÃO IEC 60335-1, GWT 750°, SEM CHAMA.
RAW MATERIAL ACC. TO SPEC IEC 60335-1, GWT 750°C, WITHOUT FLAME.

	NATURAL	 - PA 6.6 V-0	141628-5
	PRETO / BLACK	PA 6.6 V2 ESTABILIZADO AO CALOR	141628-4
OBSOLETE	AMARELO / YELLOW	PA 6.6 94 V2	141628-3
	NATURAL	PA 6.6 94 V2	141628-2
OBSOLETE	NATURAL	PA 6.6 94 V1	141628-1
	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.C.CANTER1 29JAN2016	 TE Connectivity		
DIMENSIONS: mm		CHK W.L.STEFANI 29JAN2016			
		APVD - 29JAN2016			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-37094			
0 PLC ±- 1 PLC ±0,3 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		APPLICATION SPEC -	NAME FASTON REC. HSG. .110 SERIES		
MATERIAL -		WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO C-141628
FINISH -		RESTRICTED TO -			
		CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1
				REV FI	