

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
AJ	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	REVISED PER EC 0514-0150-05	05OCT2005	REH	JL

D

C

B

A

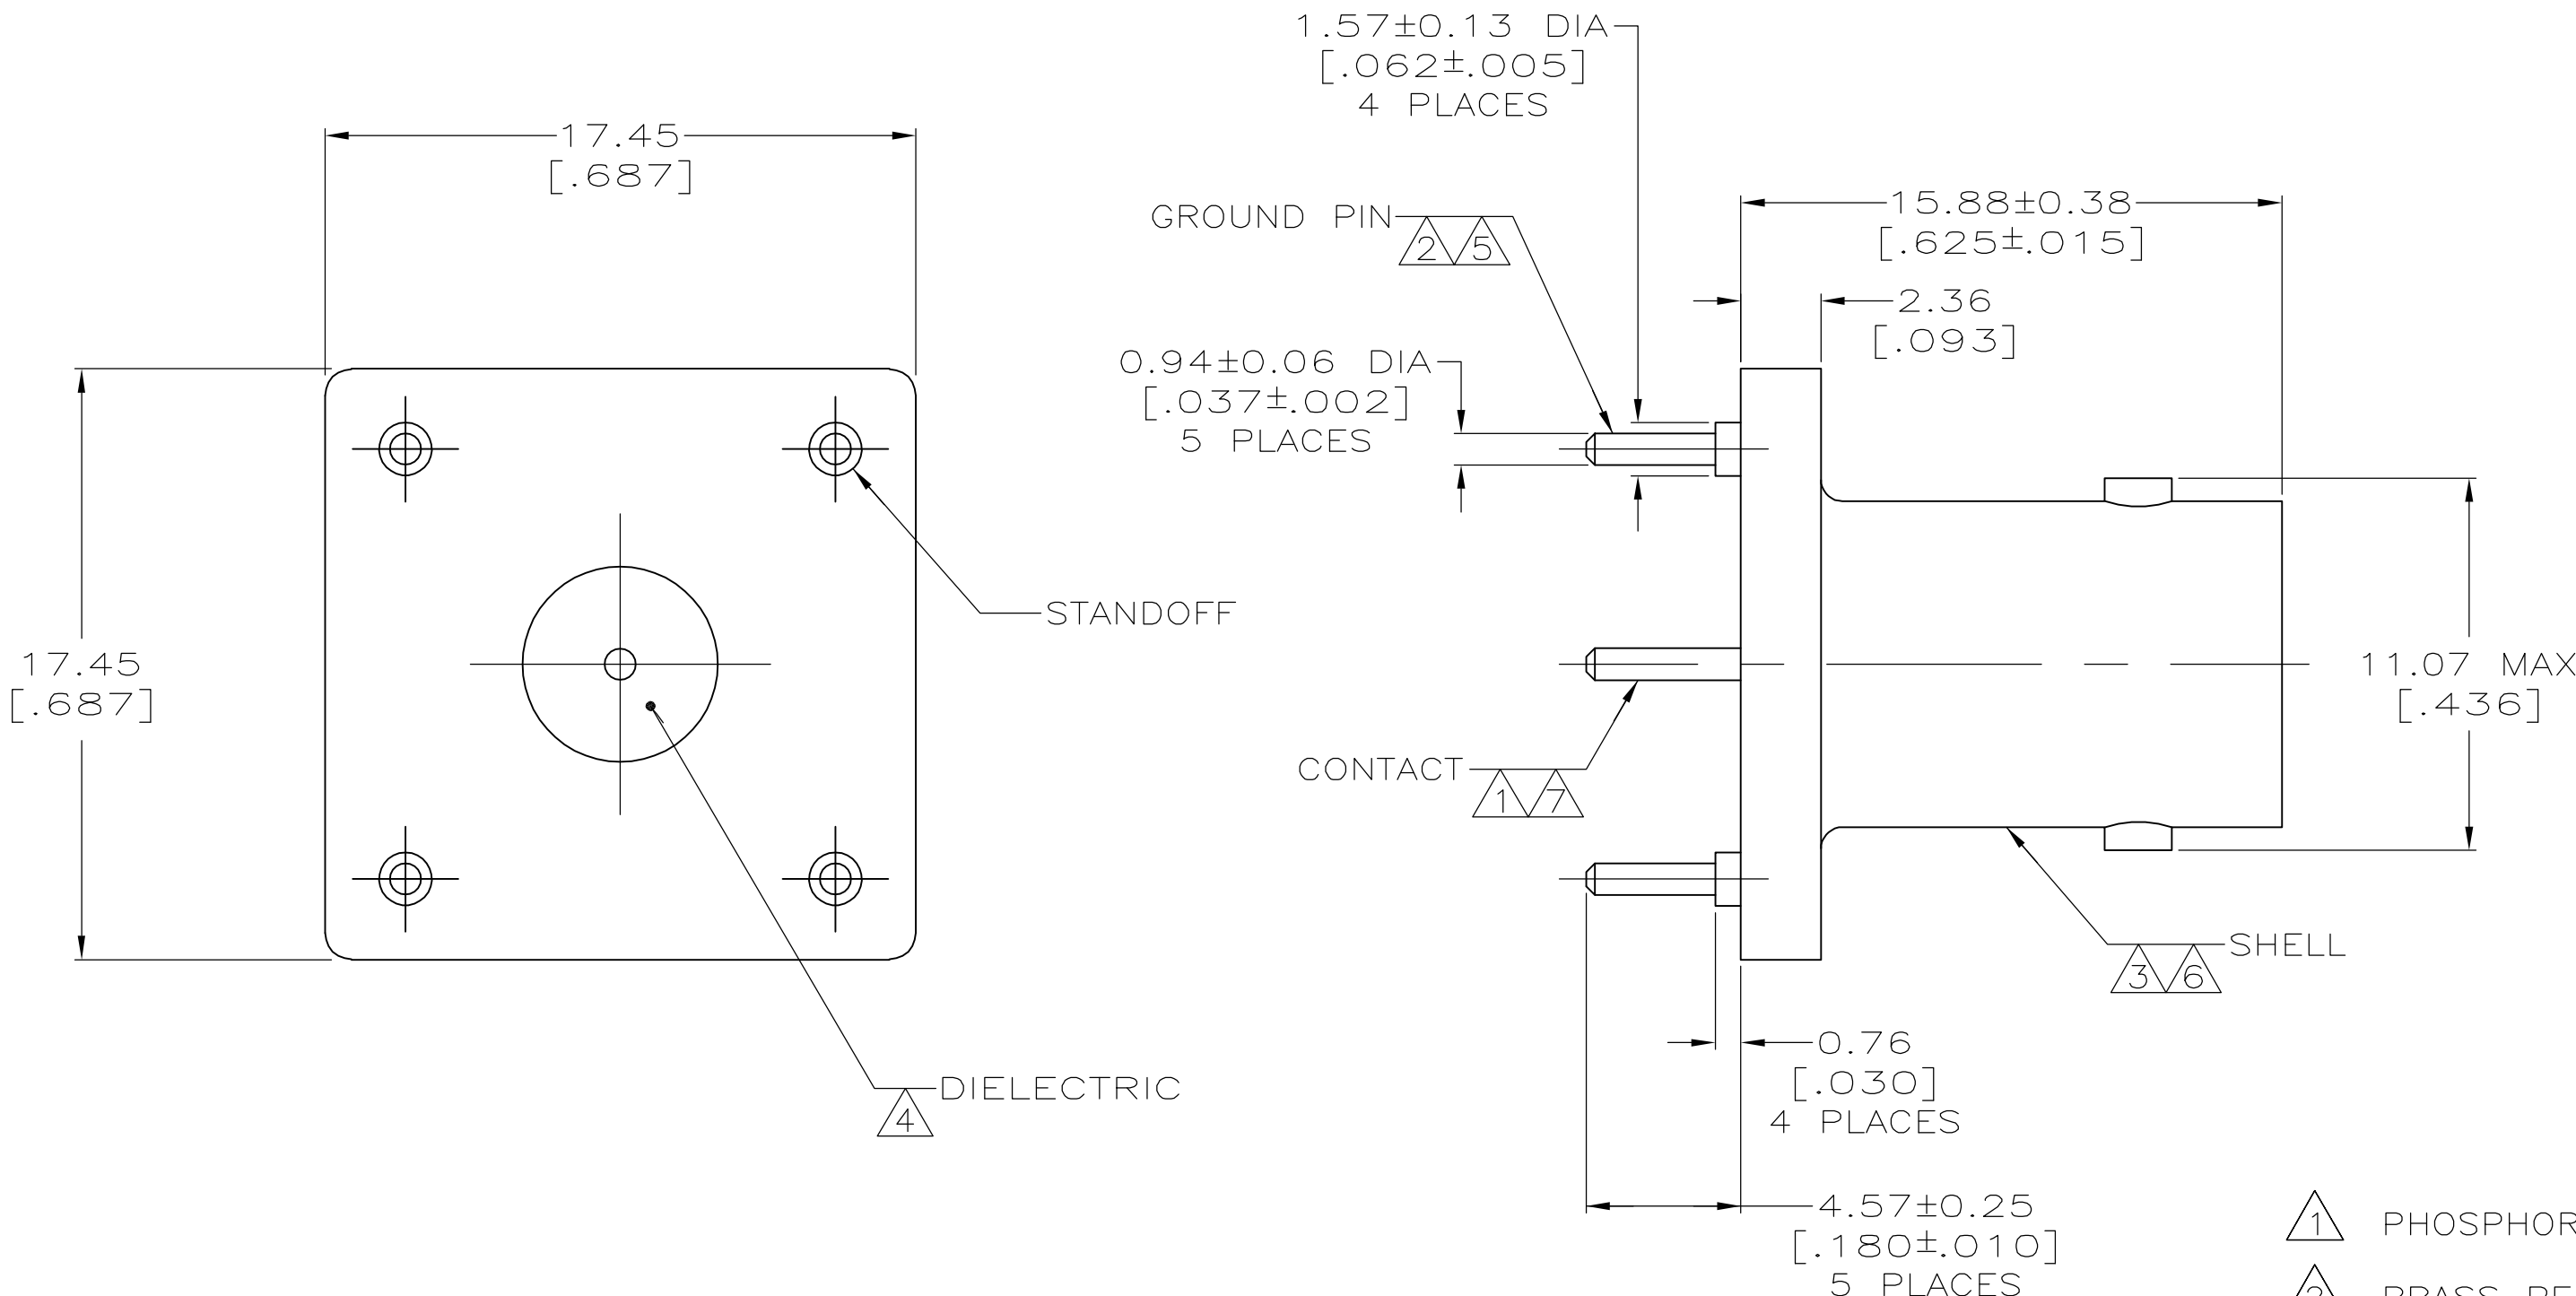

- 1 PHOSPHOR BRONZE PER QQ-B-750.
- 2 BRASS PER ASTM-B-16.
- 3 ZINC PER QQ-Z-363.
- 4 POLYESTER, PBT, PER MIL-M-24519.
- 5 TIN PLATE PER ASTM-B-545
2.54 μm [.000100] MINIMUM THICK.
- 6 NICKEL PLATE PER QQ-N-290
3.81 μm [.000150] MINIMUM THICK.
- 7 GOLD PLATE PER ASTM-B-488,
0.76 μm [.000030] MINIMUM THICK.
- 8. SEE INSTRUCTION SHEET 408-9889.

DRILL HOLE TO RECEIVE
0.94±0.06 [.037±.002]
DIA PIN, 5 REQUIRED

SUGGESTED PCB CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA - 26APR2005	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: mm [INCHES]		CHK J. HAVENER 26APR2005				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. LIPPERT 26APR2005	NAME JACK, 50 OHM, VERTICAL, PCB, BNC			
	0 PLC ± -	PRODUCT SPEC 108-12078	SIZE A2			
	1 PLC ± -	APPLICATION SPEC	CAGE CODE 00779			
MATERIAL SEE NOTES 1 - 4		FINISH SEE NOTES 5 - 7	DRAWING NO C=5414460		RESTRICTED TO -	
CUSTOMER DRAWING			SCALE 5:1	SHEET 1 of 1	REV A	

5414460

B

A