


Si photodiode S2386 series

For visible to IR, general-purpose photometry

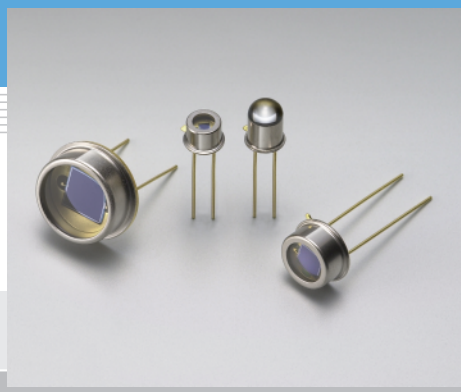

Features

- High sensitivity
- Low dark current
- High reliability
- High linearity

Applications

- Analytical equipment
- Optical measurement equipment

■ General ratings / Absolute maximum ratings


Type No.	Dimensional outline/ Window material *	Package (mm)	Active area size (mm)	Effective active area (mm ²)	Absolute maximum ratings		
					Reverse voltage V _R Max. (V)	Operating temperature T _{opr} (°C)	Storage temperature T _{stg} (°C)
S2386-18K	①/K	TO-18	1.1 × 1.1	1.2	30	-40 to +100	-55 to +125
S2386-18L	②/L						
S2386-5K	③/K	TO-5	2.4 × 2.4	5.7			
S2386-44K			3.6 × 3.6	13			
S2386-45K			3.9 × 4.6	17.9			
S2386-8K	④/L	TO-8	5.8 × 5.8	33			

■ Electrical and optical characteristics (Typ. T_a=25 °C, unless otherwise noted)

Type No.	Spectral response range λ (nm)	Peak sensitivity wavelength λp (nm)	Photo sensitivity S (A/W)				Short circuit current Isc 100 lx		Dark current ID VR=10 mV Max. (pA)	Temp. coefficient of ID TCID (times/°C)	Rise time tr VR=0 V RL=1 kΩ (μs)	Terminal capacitance Ct VR=0 V f=10 kHz (pF)	Shunt resistance Rsh VR=10 mV		NEP (W/Hz ^{1/2})
			λp	GaP LED 560 nm	He-Ne laser 633 nm	GaAs LED 930 nm	Min. (μA)	Typ. (μA)					Min. (GΩ)	Typ. (GΩ)	
S2386-18K	320 to 1100	960	0.6	0.38	0.43	0.59	1	1.3	2	1.12	0.4	140	5	100	6.8 × 10 ⁻¹⁶
S2386-18L							4	5.7					25		
S2386-5K							4.4	6.0	5		1.8	730	2	50	1.4 × 10 ⁻¹⁵
S2386-44K							9.6	12	20		3.6	1600	0.5	25	
S2386-45K							12	17	30		5.5	2300	0.3		
S2386-8K							26	33	50		10	4300	0.2	10	


* Window material K: borosilicate glass, L: lens type borosilicate glass

■ Spectral response

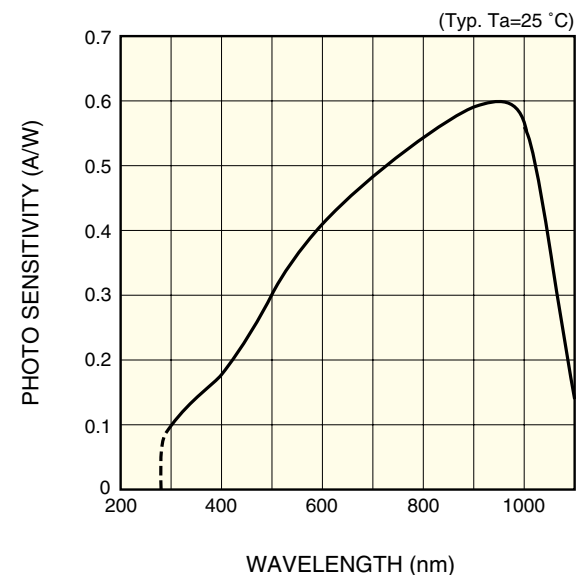


KSPDB0110EA

■ Photo sensitivity temperature characteristic

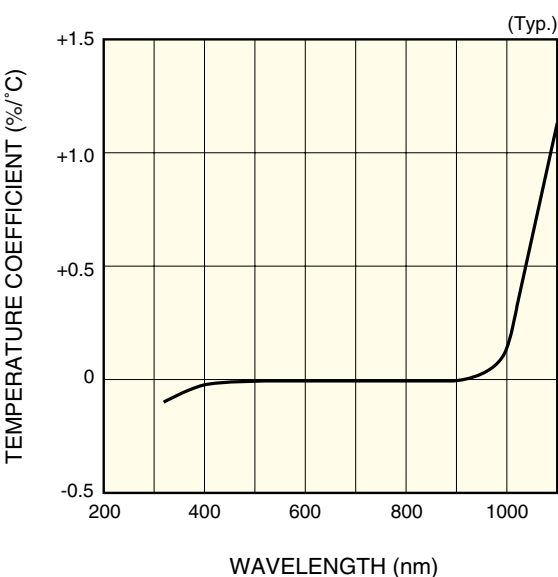


KSPDB0058EB

■ Directivity

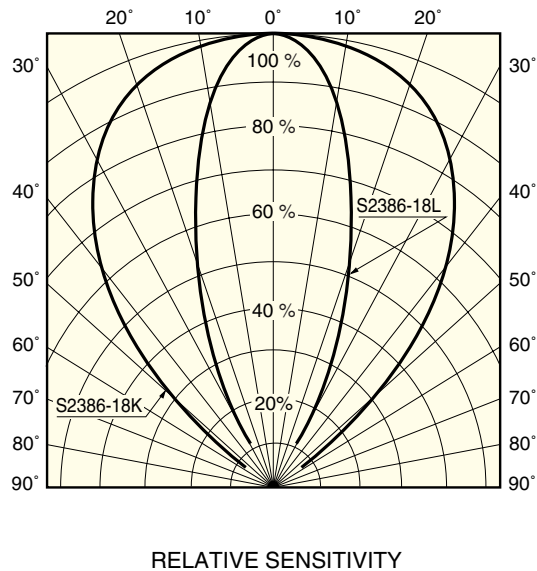


KSPDB0111EA

■ Rise time vs. load resistance

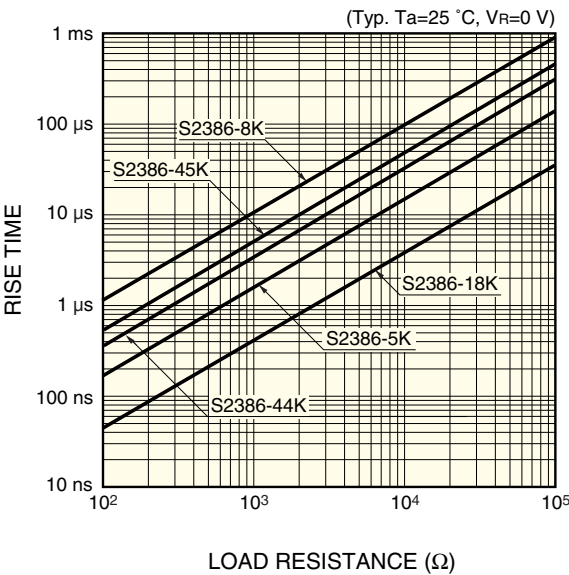


KSPDB0112EA

■ Dark current vs. reverse voltage

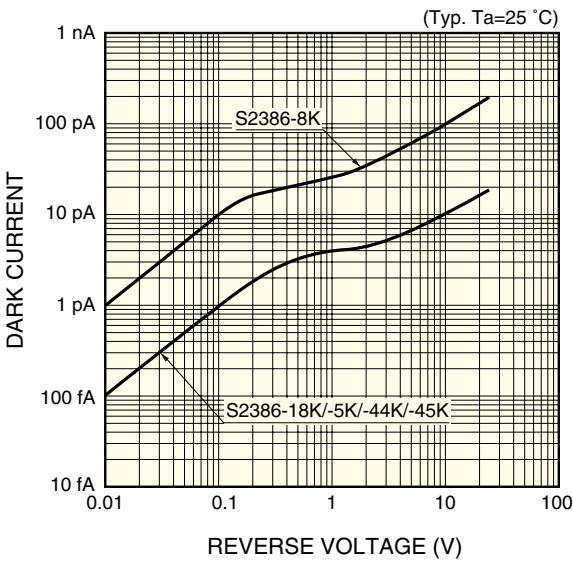

KSPDB0113EA


■ Shunt resistance vs. ambient temperature

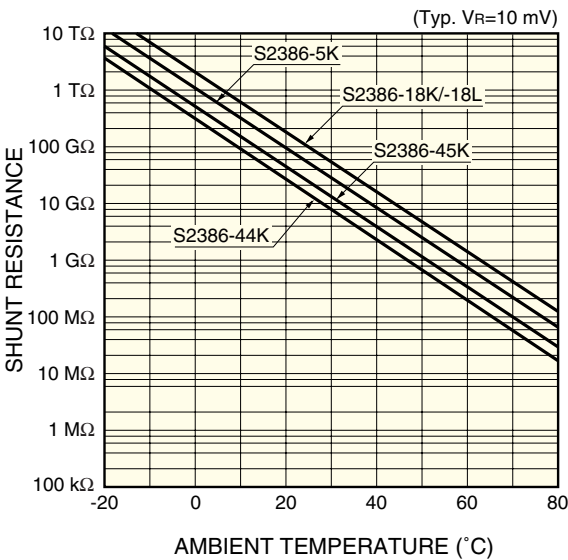

KSPDB0114EA


■ Dimensional outlines (unit: mm)

① S2386-18K

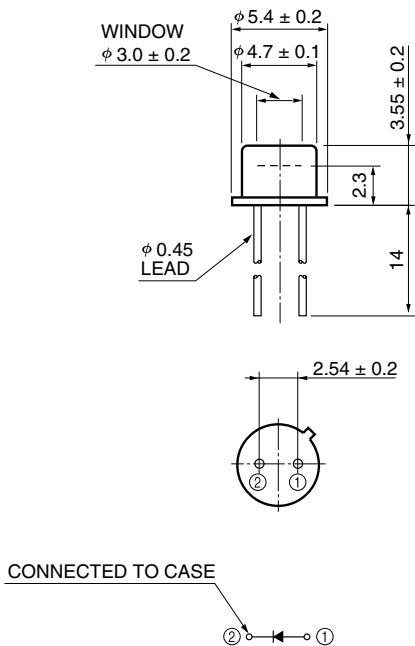


KSPDA0102EA

② S2386-18L

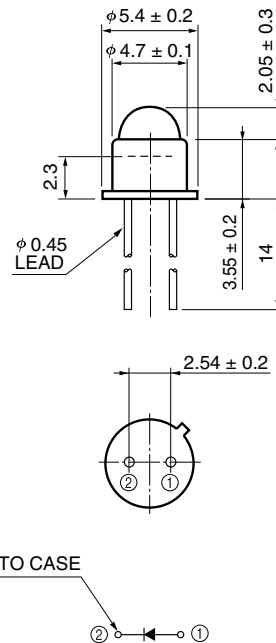

KSPDA0048EA


③ S2386-5K/-44K/-45K

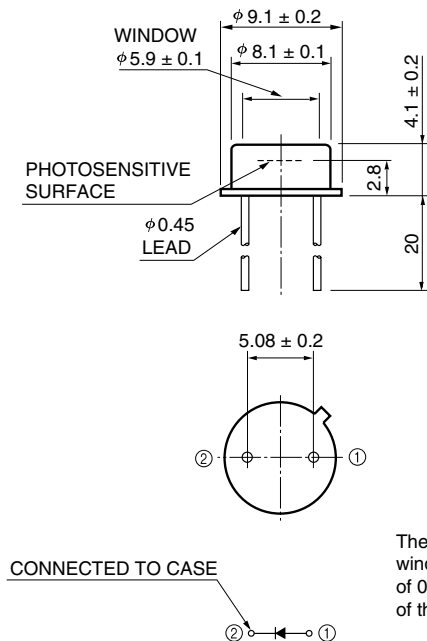

The K type borosilicate glass window may extend a maximum of 0.2 mm above the upper surface of the cap.

KSPDA0103EA

④ S2386-8K

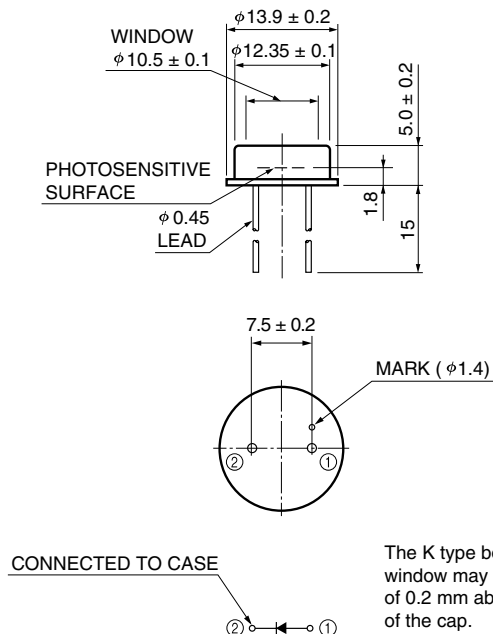

The K type borosilicate glass window may extend a maximum of 0.2 mm above the upper surface of the cap.

KSPDA0104EA

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, <http://www.hamamatsu.com>

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O. Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2001 Hamamatsu Photonics K.K.