

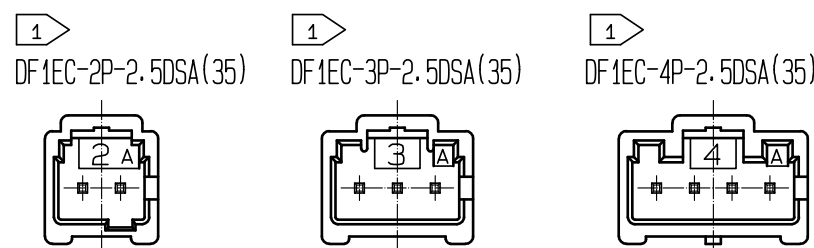
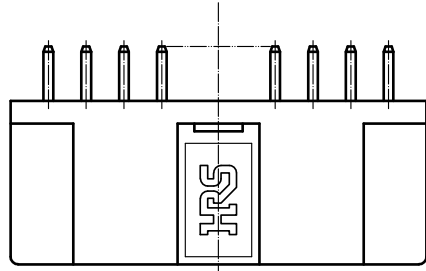
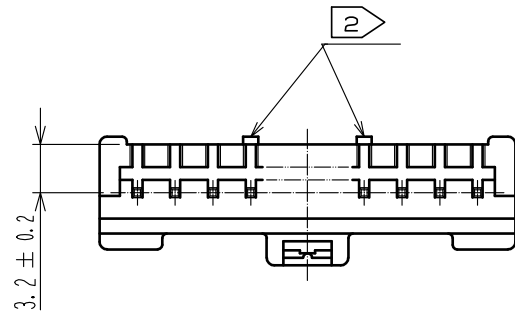
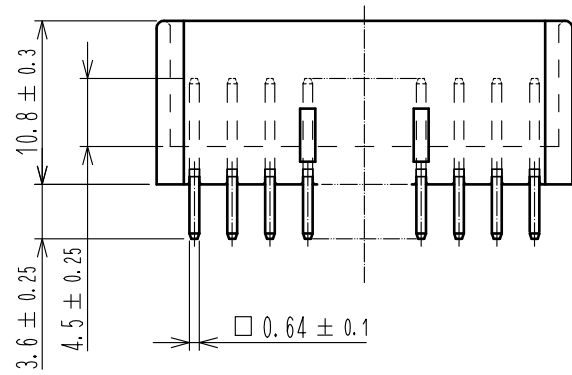



A
B
C
D
E
F

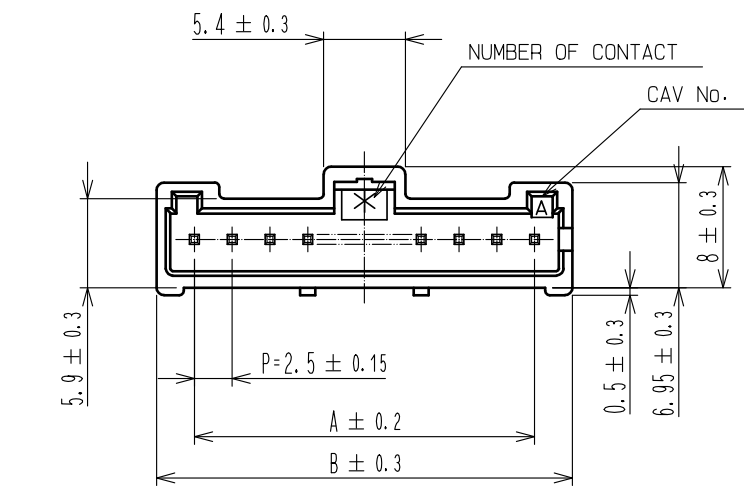


RECOMMENDED PCB LAYOUT(5:1)
(PCB THICKNESS:1.6±0.1)

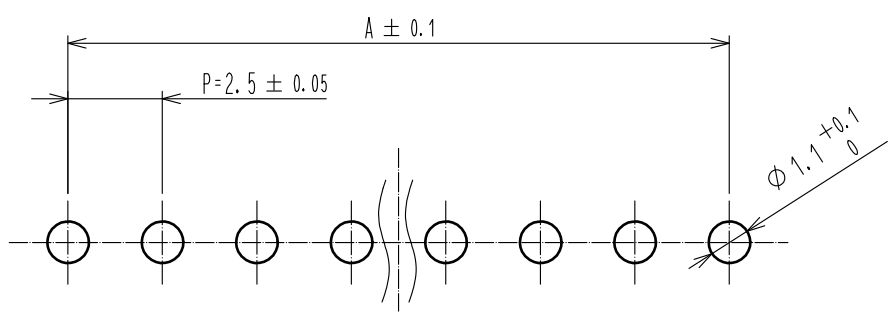

HRS DRAWING FOR PRELIMINARY

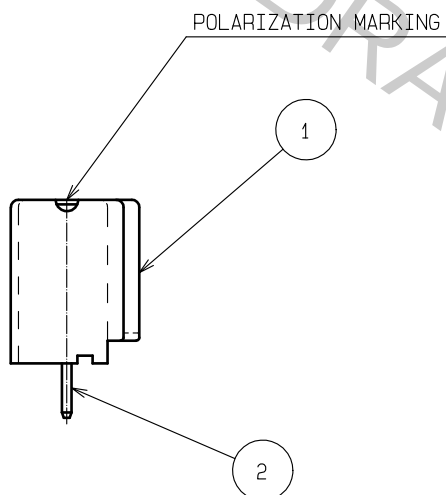


APPLICATION DIAGRAM(3:1)

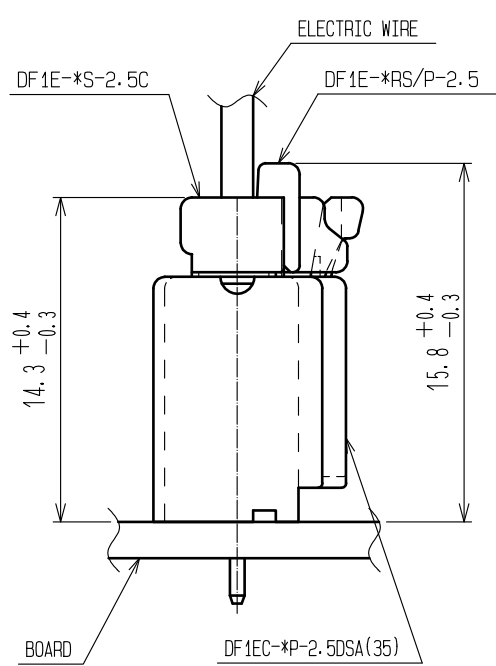

PART No.	CODE No.	NUMBER OF CONTACT	A	B
DF1EC- 2P-2.5DSA(35)	CL541-0867-4-35	2	2.5	7.5
DF1EC- 3P-2.5DSA(35)	CL541-0868-7-35	3	5.0	10.0
DF1EC- 4P-2.5DSA(35)	CL541-0869-0-35	4	7.5	12.5
DF1EC- 5P-2.5DSA(35)	CL541-0870-9-35	5	10.0	15.0
DF1EC- 6P-2.5DSA(35)	CL541-0871-1-35	6	12.5	17.5
DF1EC- 7P-2.5DSA(35)	CL541-0872-4-35	7	15.0	20.0
DF1EC- 8P-2.5DSA(35)	CL541-0873-7-35	8	17.5	22.5
DF1EC- 9P-2.5DSA(35)	CL541-0874-0-35	9	20.0	25.0
DF1EC-10P-2.5DSA(35)	CL541-0875-2-35	10	22.5	27.5
DF1EC-11P-2.5DSA(35)	CL541-0876-5-35	11	25.0	30.0
DF1EC-12P-2.5DSA(35)	CL541-0877-8-35	12	27.5	32.5
DF1EC-13P-2.5DSA(35)	CL541-0878-0-35	13	30.0	35.0
DF1EC-14P-2.5DSA(35)	CL541-0879-3-35	14	32.5	37.5
DF1EC-15P-2.5DSA(35)	CL541-0880-2-35	15	35.0	40.0

- NOTES 1 CONFIGURATION OF DF1EC-2P-2.5DSA(35), DF1EC-3P-2.5DSA(35) AND DF1EC-4P-2.5DSA(35).
2 2 AND 3 OF CONTACTS MAKE DRAWING FORM (PROJECTION) UNNECESSARY, AND 4 OF CONTACTS CONSIDERED AS ONE PROJECTION IN THE CENTER.
3. UL(FILE NO.E52653),
C-UL(FILE NO.E52653) APPROVED PRODUCT.



							SURFACE:TIN PLATED 1μm min UNDER PLATING:NICKEL PLATED 0.5μm min		
1	POLYAMIDE	NATURAL (BEIGE)・UL94V-0		2	BRASS				
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL		FINISH , REMARKS		
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED :KI. AKIYAMA		15.05.23	DRAWING NO.		EDC-161943-35-00		
		CHECKED :TS. FUKUSHIMA		15.05.23	PART NO.		DF1EC- *P-2.5DSA(35)		
		DESIGNED :TS. KUMAZAWA		15.05.23	CODE NO.		CL541-		
		DRAWN :MI. SAKIMURA		15.05.23			 1/1		

A
B
C
D
E
F