
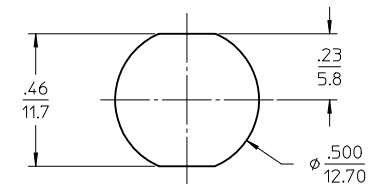
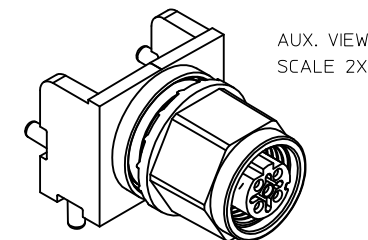
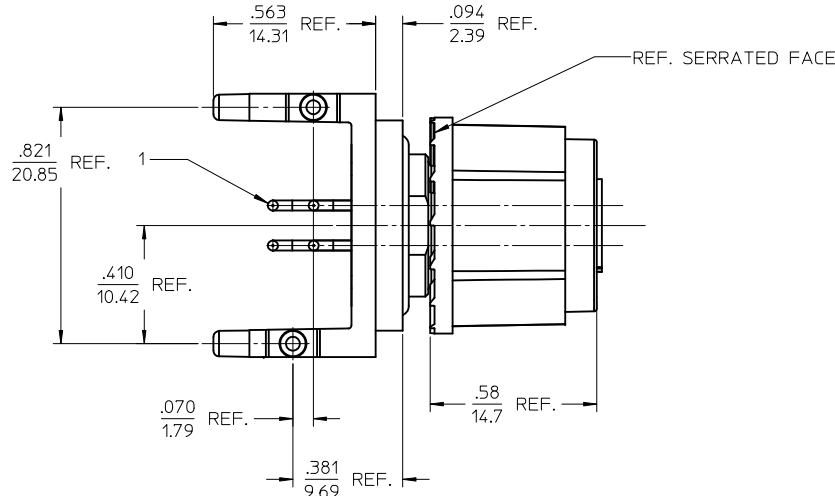
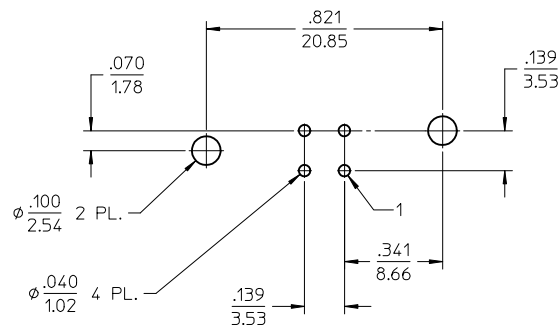
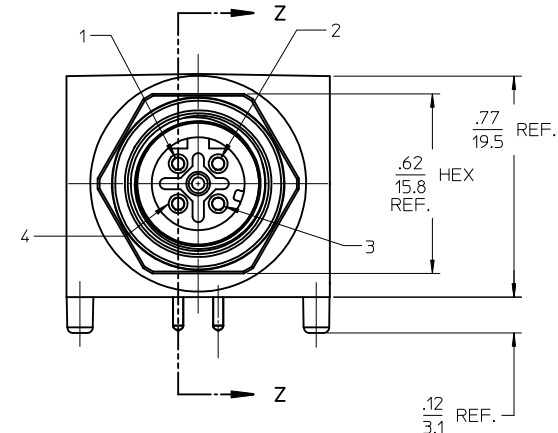
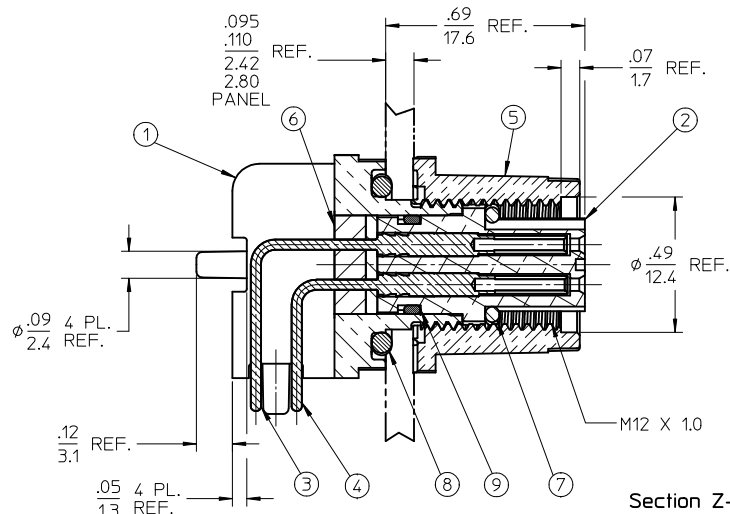


MATERIAL NO.	ENGINEERING NO.
1302990100	130299-0100

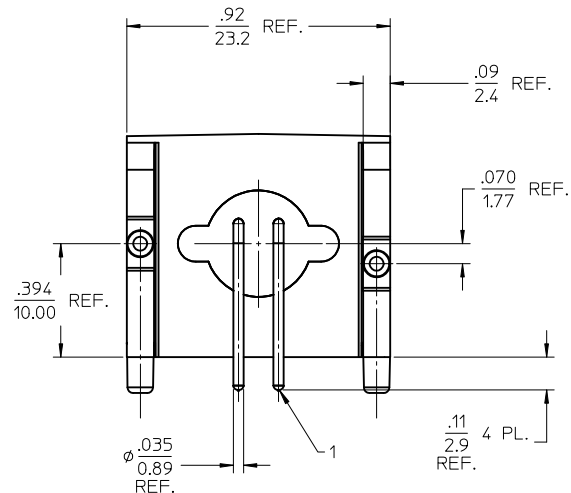

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. PRODUCT SPEC: PS-130299-001
 4. PACKAGING: PK-130299-001
 5. MATES WITH: MALE D-CODE CABLE ASSEMBLY
 6. ELECTRICAL SPECS:
VOLTAGE: 250V AC/DC
CURRENT: 4 AMPS
 7. PROTECTION: IP67
 8. ASSEMBLY IS RoHS COMPLIANT

4C PCB HOLE LAYOUT
(COMPONENT SIDE)

MOUNTING HOLE LAYOUT

9	1	INSULATOR O-RING	VITON	BROWN
8	1	PANEL O-RING	VITON	RED
7	1	MATING O-RING	VITON	RED
6	A/R	POTTING COMPOUND	EPOXY	RED
5	1	PANEL NUT	ZINC (DIE-CAST)	CHROME/DUPLEX NICKEL
4	2	CONTACT SOCKET SHORT	BRASS	GOLD PLATED
3	2	CONTACT SOCKET, LONG	BRASS	GOLD PLATED
2	1	4/C D-CODE INSULATOR	PUR	BLACK
1	1	RECEPTACLE SHELL, M12	ZINC (DIE-CAST)	WHITE BRONZE PLATING
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

REMOVED CUST SIGN-OFF
EC NO: WNA2011-0198
DRAWN BY: DRWNRSTONE 2010/10/15
CHKD BY: J. JOZWIK 2010/10/21
APPR: J. MURPHY 2010/12/14

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0005
3 PLACES	± .01	± .001
2 PLACES	± .02	± .002
1 PLACE	± .03	± .003

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM

DRAWN BY: RSTONE 2010/05/17
CHECKED BY: K. JOZWIK 2010/05/25
APPROVED BY: J. MURPHY 2010/05/20

MATERIAL NO. SEE CHART
DOCUMENT NO. SD-130299-005

SCALE 3:1
DESIGN UNITS INCH
THIRD ANGLE PROJECTION

MIC PCB RECEPTACLE
4C, D-CODE, 90 DEG

MOLEX INCORPORATED

SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION