

Ripple Filter IC AN1281SSM

Overview

The AN1281SSM is a ripple filter IC that rejects the ripple component superimposed on the regulator output. Use for the VCO bias of cellular phones improves C/N and S/N.



Features

- Small I/O voltage difference
- The mounting area is reduced by adopting the SSmini-type package

Applications

- Cellular phones and others

Block Diagram

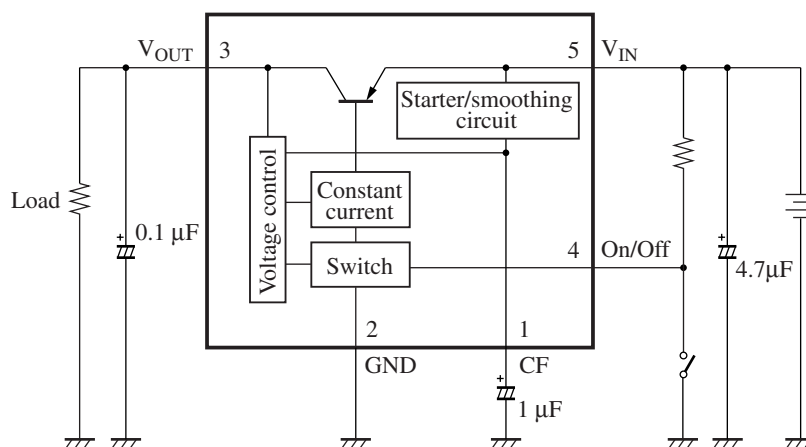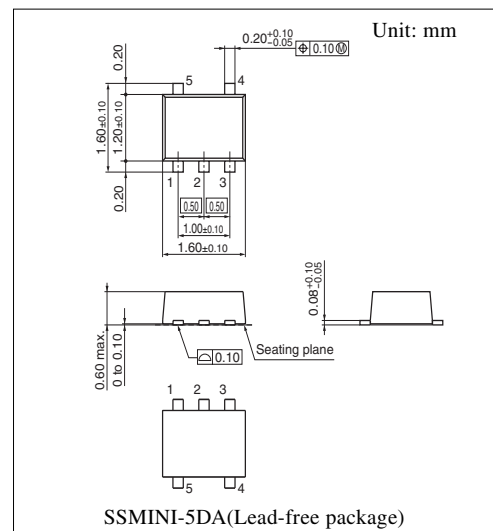

¶ The products and specifications are subject to change without any notice. Please ask for the latest product standards to guarantee the satisfaction of your product requirements.

Semiconductor Company, Matsushita Electric Industrial Co., Ltd.

■ Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage	V_{IN}	4.5	V
Supply current	I_{CC}	20	mA
Power dissipation ^{*2}	P_D	60	mW
Operating ambient temperature ^{*1}	T_{opr}	-25 to +75	°C
Storage temperature ^{*1}	T_{stg}	-40 to +125	°C
Output current	I_O	-15	mA
Allowable application voltage for on/off pin ^{*3}	$V_{ON/OFF}$	V_{IN}	V
Allowable maximum capacitance for CF pin	CF	10	μF

Note) 1. Do not apply external currents or voltages to any pins not specifically mentioned.

For circuit currents, '+' denotes current flowing into the IC, and '-' denotes current flowing out of the IC.

2. ^{*1}: Except for the power dissipation, the operating ambient temperature and storage temperature, all ratings are for $T_a = 25^\circ\text{C}$.

^{*2}: The power dissipation shown is the value for $T_a = 75^\circ\text{C}$.

^{*3}: Do not over the supply voltage.

■ Recommended Operating Range

Parameter	Symbol	Range	Unit
Supply voltage	V_{CC}	2.5 to 4.3	V

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output voltage 1	V_{O1}	$V_{IN} = 3.0\text{ V}$, $I_{OUT} = -1\text{ }\mu\text{A}$	2.62	2.82	—	V
Output voltage 2	V_{O2}	$V_{IN} = 3.0\text{ V}$, $I_{OUT} = -15\text{ mA}$	2.55	2.70	—	V
Consumption current 1	I_{CC1}	$V_{IN} = 3.0\text{ V}$, $I_{OUT} = -1\text{ }\mu\text{A}$	-735	-565	—	μA
Consumption current 2	I_{CC2}	$V_{IN} = 3.0\text{ V}$, $I_{OUT} = -15\text{ mA}$	-670	-515	—	μA
Load regulation	REG_L	$V_{IN} = 3.0\text{ V}$, $I_{OUT} = -1\text{ }\mu\text{A}$ to -15 mA	0	120	220	mV
Consumption current against load change	I_{REG}	$V_{IN} = 3.0\text{ V}$, $I_{OUT} = -1\text{ }\mu\text{A}$ to -15 mA	0	51	110	μA
Ripple rejection ratio 1	RR_1	$V_{IN} = 3\text{ V} \pm 0.1\text{ V}$, $I_{OUT} = -15\text{ mA}$ $f = 1\text{ kHz}$	26.5	29.5	—	dB
Ripple rejection ratio 2	RR_2	$V_{IN} = 3\text{ V} \pm 0.1\text{ V}$, $I_{OUT} = -15\text{ mA}$ $f = 25\text{ kHz}$	30.5	33.5	—	dB
Ripple rejection ratio 3	RR_3	$V_{IN} = 3\text{ V} \pm 0.1\text{ V}$, $I_{OUT} = -15\text{ mA}$ $f = 100\text{ kHz}$	26.5	29.1	—	dB
Consumption current at off	I_{OFF}	$V_{IN} = 4.3\text{ V}$, On/Off = 0 V	—	—	1	μA