


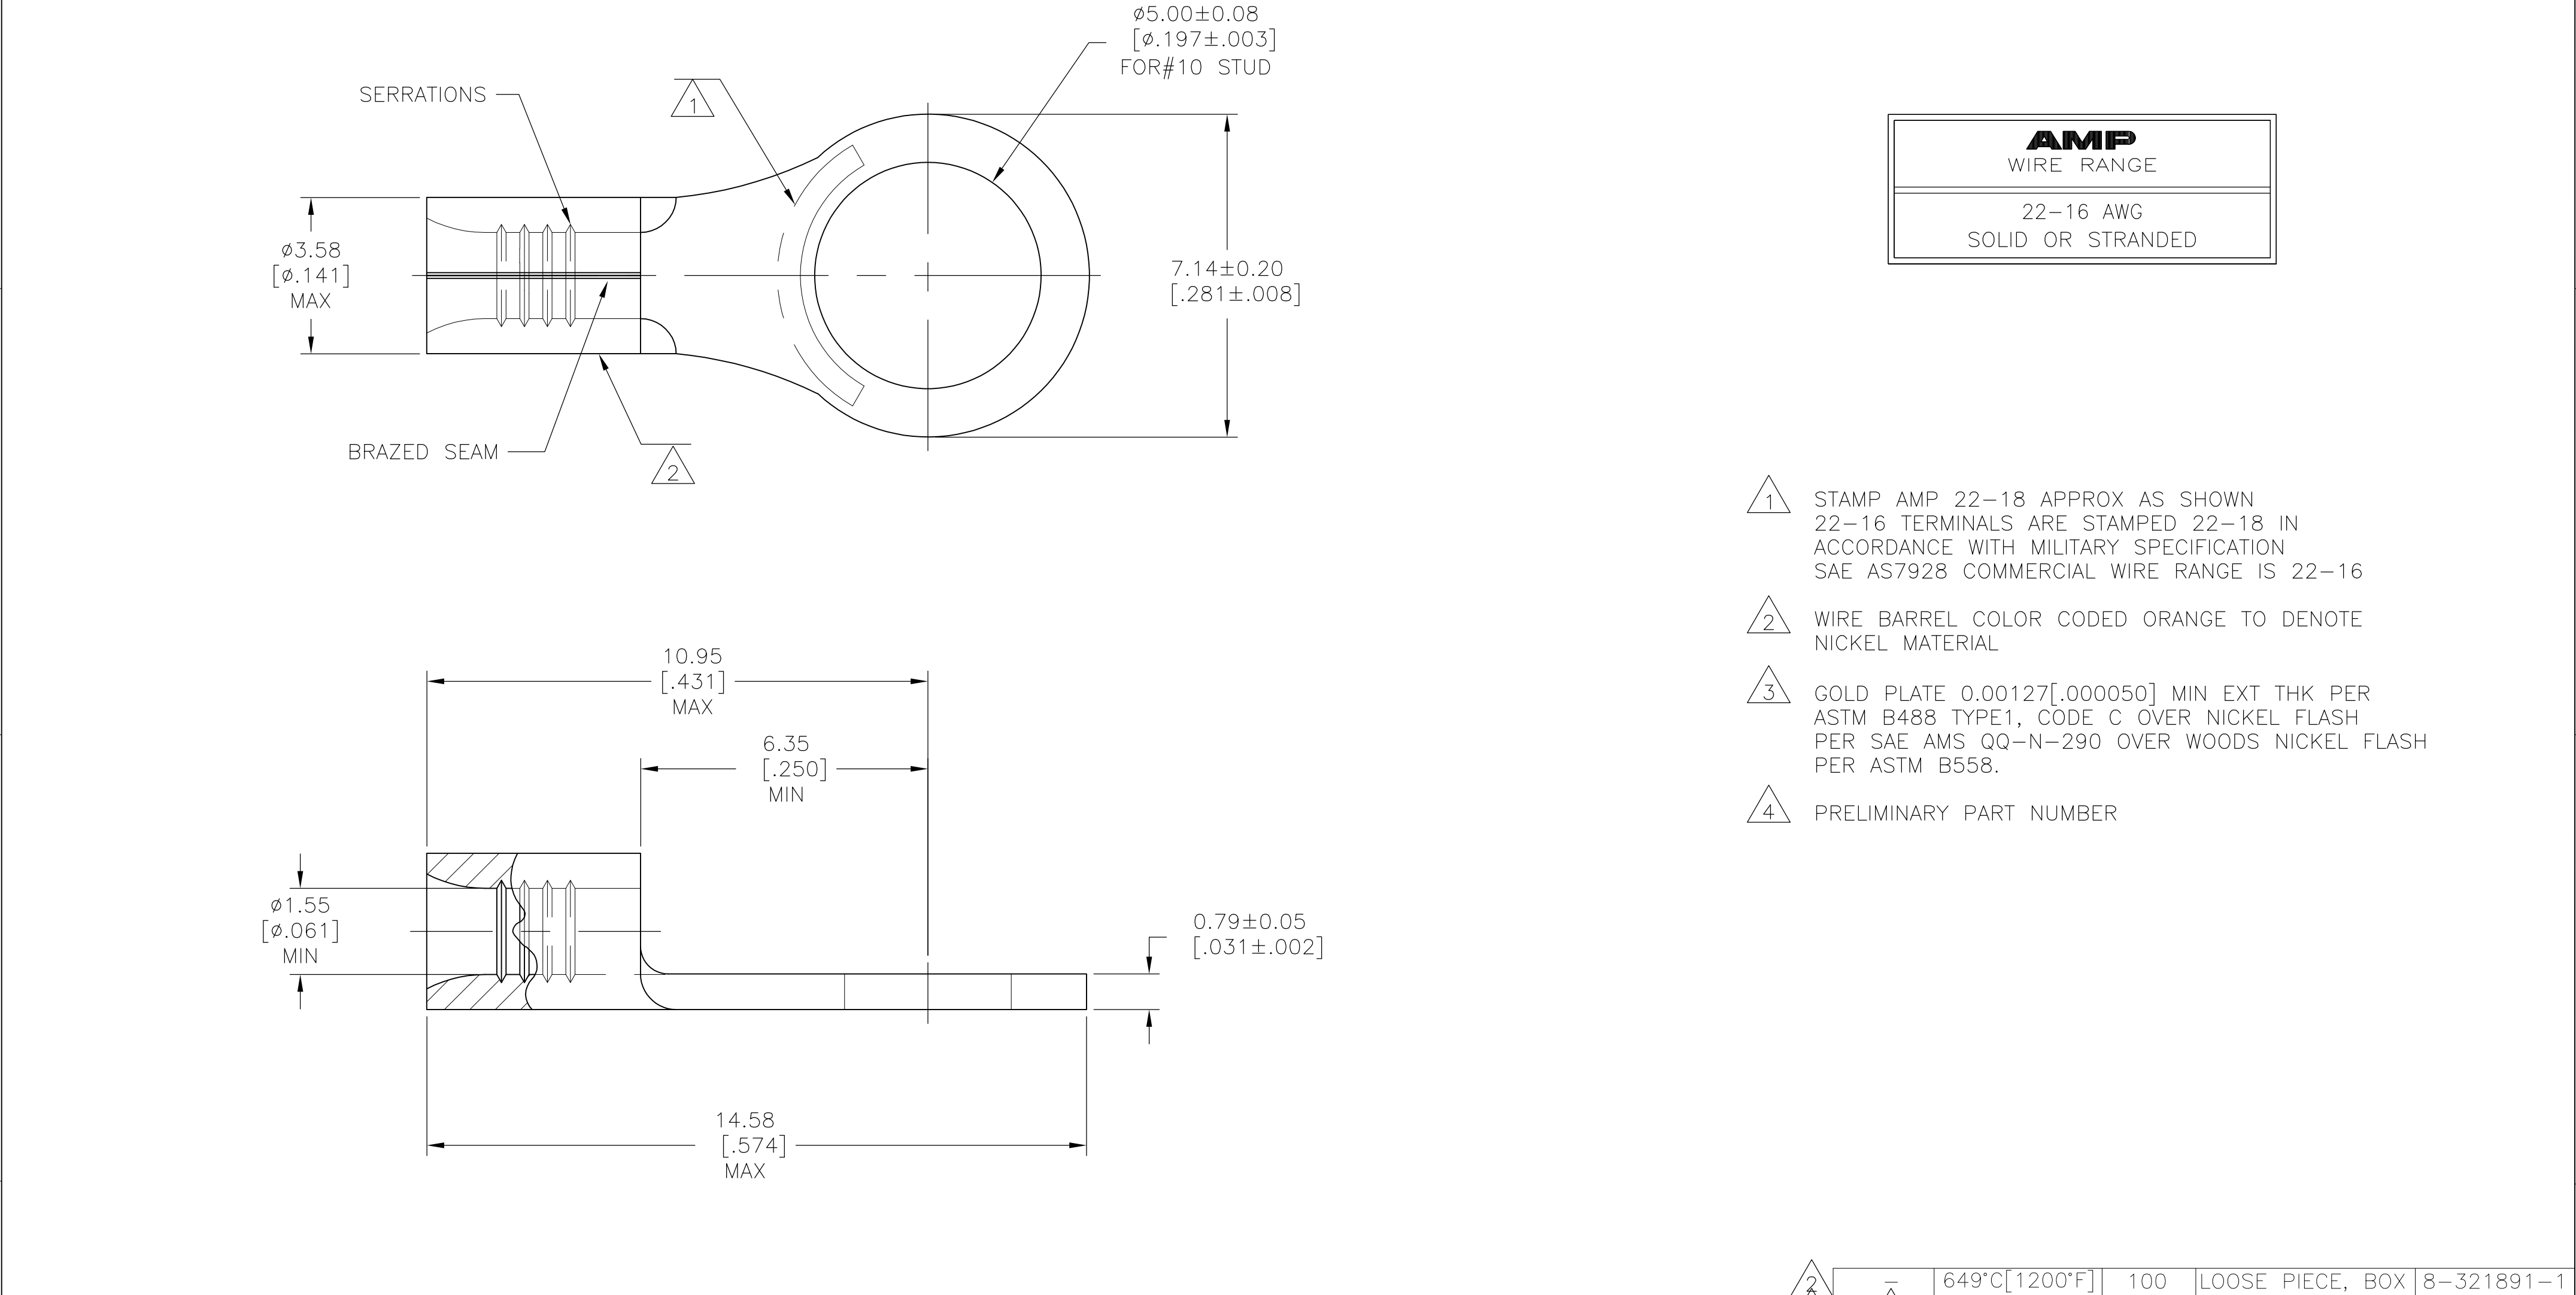

AMP
WIRE RANGE

22-16 AWG
SOLID OR STRANDED

- 1
- STAMP AMP 22-18 APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPECIFICATION
SAE AS7928 COMMERCIAL WIRE RANGE IS 22-16
- 2
- WIRE BARREL COLOR CODED ORANGE TO DENOTE
NICKEL MATERIAL
- 3
- GOLD PLATE 0.00127[.000050] MIN EXT THK PER
ASTM B488 TYPE1, CODE C OVER NICKEL FLASH
PER SAE AMS QQ-N-290 OVER WOODS NICKEL FLASH
PER ASTM B558.
- 4
- PRELIMINARY PART NUMBER

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: SEE TABLE
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 0.26-1.65mm ² [509-3,260] CIR MILS SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

2	3	649°C[1200°F]	100	LOOSE PIECE, BOX	8-321891-1
4	3	260°C[500°F]	1000	LOOSE PIECE	321891-1
2	3	649°C[1200°F]	1000	LOOSE PIECE	321891
FINISH		MAX OPERATING TEMP	QUANTITY	PACKAGE TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TA BRINKMAN 4-15-93	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK DA PATTERSON 4-15-93			
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD DE MILLER 4-15-93	NAME		
		PRODUCT SPEC	TERMINAL, RING TONGUE, HIGH TEMPERATURE, STRATO-THERM™		
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
		—	A2	00779	C-321891
MATERIAL NICKEL PER ASTM B-162 ANNEALED	FINISH SEE TABLE	WEIGHT —	CUSTOMER DRAWING		
			SCALE	SHEET	REV
			10:1	1 OF 1	F1