

# Bridgelux Vero 18 Array Series

**Product Data Sheet DS32 – Published July 18<sup>th</sup> 2013**

**BXRC-27x4000, BXRC-30x4000, BXRC-35E4000, BXRC-40E4000,  
BXRC-50C4000**



## Introduction

Vero™ represents a revolutionary advancement in chip on board (COB) light source technology and innovation. These new LED light sources simplify luminaire design and manufacturing processes, improve light quality, and define a platform for future functionality integration.

Vero is available in four different LES (light emitting surface) configurations and has been engineered to reliably operate over a broad current range, enabling new degrees of flexibility in luminaire design optimization. These new arrays deliver increased lumen density to enable improved beam control and precision lighting with 2 and 3 SDCM color control standard for clean and consistent uniform lighting.

Vero includes an on board connector port to enable solder free electrical interconnect and simple easy to use mounting features to enable plug-and-play installation.

## Features

- Market leading efficacy, 122 lm/W typical and 111 lm/W minimum
- Vero 18 lumen output performance ranges from 950 to as much as 8,200 lumens
- Broad range of CCT options from 2700K to 5000K
- CRI options include; minimum 70, 80, 90 for standard and 97 typical for Decor products
- 2 and 3 SDCM color control for 2700K-4000K CCT
- Reliable operation at up to 2X nominal drive current
- Radial die pattern and improved lumen density
- Thermally isolated solder pads
- Onboard connector port
- Top side part number markings

## Benefits

- Broad application coverage for interior and exterior lighting
- Flexibility for application driven lighting design requirements
- High quality true color reproduction
- Uniform consistent white light
- Flexibility in design optimization
- Improved optical control
- Enhanced ease of use and manufacturability
- Solder-less connectivity enables plug & play installation and field upgradability
- Improved inventory management and quality control



---

## Table of Contents


## Page

|                                                                            |    |
|----------------------------------------------------------------------------|----|
| Product Feature Map                                                        | 3  |
| Product Nomenclature                                                       | 3  |
| Top Side Part Number Markings                                              | 4  |
| Enhanced Connectivity Options                                              | 4  |
| Lumen Maintenance Characteristics                                          | 4  |
| Environmental Compliance                                                   | 4  |
| UL Recognition                                                             | 4  |
| CE Recognition                                                             | 5  |
| Minor Product Change Policy                                                | 5  |
| Case Temperature Measurement Point                                         | 5  |
| Product Selection Guide                                                    | 6  |
| Product Selection Guide (continued)                                        | 7  |
| Typical Performance at Alternative Drive Currents                          | 8  |
| Flux Characteristics                                                       | 9  |
| Electrical Characteristics                                                 | 10 |
| Absolute Minimum and Maximum Ratings                                       | 11 |
| Typical Forward Current Characteristics                                    | 12 |
| Typical Relative Luminous Flux vs. Current, $T_j=25^{\circ}\text{C}$       | 13 |
| Typical Light Output Characteristics vs. Temperature                       | 14 |
| Typical Chromaticity Characteristics vs. Temperature                       | 15 |
| Optical Characteristics                                                    | 16 |
| Wavelength Characteristics at Rated Test Current, $T_j=25^{\circ}\text{C}$ | 17 |
| Mechanical Dimensions                                                      | 18 |
| Color Control Information                                                  | 19 |
| Design Resources                                                           | 22 |

---

## Product Feature Map

Vero 18 is the second largest form factor in the exciting new Vero family of next generation solid state light sources. In addition to delivering the performance and light quality required for many lighting applications, Vero incorporates several features to simplify the design integration and manufacturing process, accelerate time to market and reduce system costs. Please consult the Bridgelux Vero Array Series Product Brief for more information on the Vero family of products.

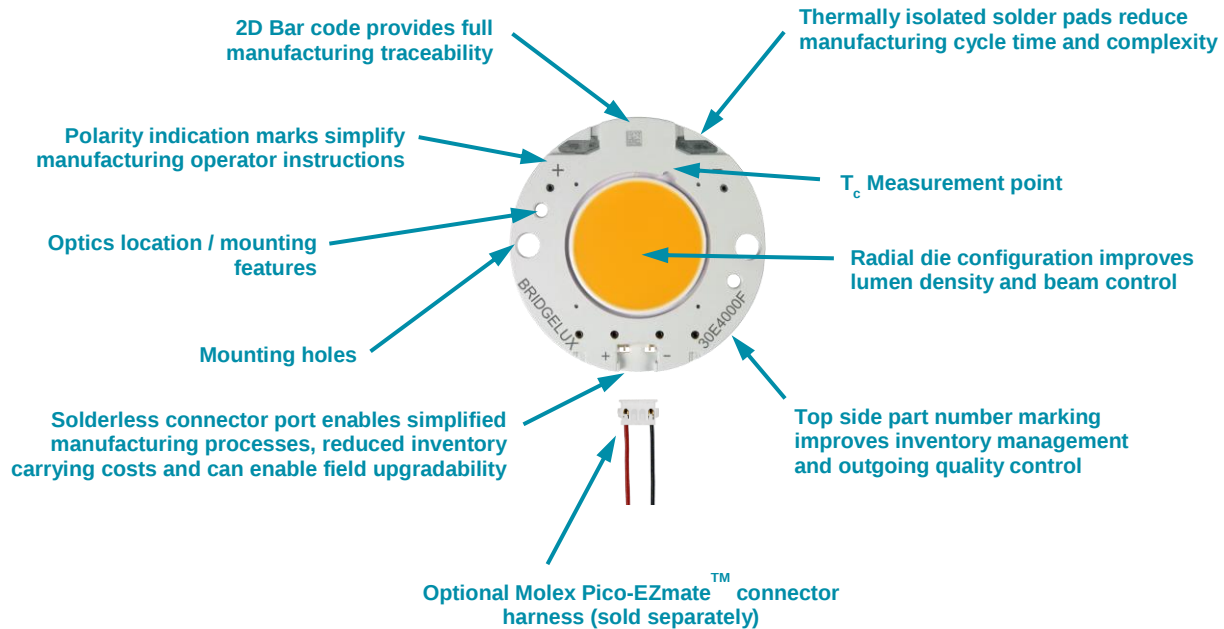

## Product Nomenclature

The part number designation for Bridgelux Vero LED arrays is explained as follows:

BXRC – AB C DEFG – H – IJ

Where:

BXRC – Designates product family

AB – Designates the nominal color temperature; 27 = 2700K; 30 = 3000K, etc.

C – Designates minimum CRI; C = 70, E = 80, G = 90, H = 95

DEFG – Designates nominal flux; 2000 = 2000 lm, 4000 = 4000 lm, etc.

H – Designates array configuration

IJ – Designates CCT Bin options

02 = 2 SDCM

03 = 3 SDCM

04 = 4 SDCM

---

## Top Side Part Number Markings

Vero includes a top side part number marking to help simplify inventory management and increase opportunities for production quality control. Any Vero product can be quickly identified to determine the product configuration, color or CRI by simply looking at its top side markings. Unlike previous product generations where markings were included only on the back side of the array, no longer is it necessary to handle (turnover), uninstall the array in an infield application or guess which product it is by the color of the phosphor area. The Vero line of LED array products also has a 2D bar code which provides additional information and full product traceability for quality control purposes.

## Enhanced Connectivity Options

Vero's thermally isolated solder pads have been designed to make soldering fast and secure. For those who prefer an even faster solderless installation, Vero has a connector port that can be used to further simplify your manufacturing process, reduce inventory cost and allow for field upgradability. The connector port mates to the Molex Pico-EZmate connector harness, sold separately by Molex and through their distribution network. The Molex connector harnesses come in a variety of wire lengths and wire gauge options and can also be custom engineered to meet your specific design requirements. Please consult your local Molex sales representative or visit [www.molex.com](http://www.molex.com) for more information.

## Lumen Maintenance Characteristics

Bridgelux projects that the Vero 18 family of LED array products will deliver, on average, greater than 70% lumen maintenance after 50,000 hours of operation at two times the rated forward test current. This performance assumes constant current operation at up to 2 times the nominal test current (2X drive current as is indicated in Table 4) with case temperature maintained at or below 85°C. For use beyond these typical operating conditions please consult your Bridgelux sales representative for further assistance.

These projections are based on a combination of package test data, semiconductor chip reliability data, a fundamental understanding of package related degradation mechanisms, and performance observed from products installed in the field using Bridgelux die technology. Bridgelux conducts lumen maintenance tests per LM-80. Observation of design limits is required in order to achieve this projected lumen maintenance.

## Environmental Compliance

Bridgelux is committed to providing environmentally friendly products to the solid-state lighting market. Vero LED Arrays comply with the European Union directives on the restriction of hazardous substances in electronic equipment, namely the RoHS directive. Bridgelux does not intentionally add the following restricted materials to any LED array products: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

## UL Recognition

Bridgelux secures UL Recognition for all of its LED array products. Please refer to the UL file 357031 for the latest list of UL Recognized Bridgelux LED arrays. The Vero series of LED arrays are currently undergoing UL testing, and the UL file will be updated as tests are complete to satisfy UL recognition requirements. Bridgelux uses UL Recognized materials with suitable flammability ratings in the Vero LED array products to streamline the process for customers to secure UL listing of the final luminaire product. Bridgelux recommends that luminaires are designed with a Class 2 driver to facilitate the UL listing process.

---

## CE Recognition

In accordance with the relevant European Union Directives, the BXRC series LED array products conform to the applicable requirements of the IEC/EN 62031:2008 (LED Modules for General Lighting Safety Specifications) and IEC 62471:2006 (Photobiological Safety of Lamps and Lamp Systems). The Vero series of LED arrays are currently undergoing UL and CE testing and are expected to be completed shortly. Bridgelux maintains a CE Declaration of Conformity statement on its website and displays the CE mark on product packing labels.

## Minor Product Change Policy

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

## Case Temperature Measurement Point

A case temperature measurement point location is included on the top surface of the Vero LED arrays. The location of this measurement point is indicated in the mechanical dimensions section of this data sheet.

The purpose of this measurement point is to allow the user access to a measurement point correlates to the true case temperature on the back surface of the LED array. Once the LED array is installed, it is challenging to measure the back surface of the array, or true case temperature.

For consistent and repeatable temperature measurements can be correlated to the data sheet performance specifications and to published LM-80 reliability data. The use of case temperature measurements point is more fully explained in AN30.

## CAUTION: CONTACT WITH OPTICAL AREA

Avoid any contact with the optical area. Do not touch the optical area of the Vero LED array or apply stress to the yellow phosphor resin area. Contact may cause damage to the LED array.

Optics and reflectors must not be mounted in contact with the yellow phosphor resin area. Optical devices may be mounted on the top surface of the plastic housing of the Vero LED array. Use the mechanical features of the LED array housing, edges and/or mounting holes to locate and secure optical devices as needed.

## CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED array. Please consult Bridgelux Application Note AN31 for additional information.

## CAUTION: EYE SAFETY

Eye safety classification for the use of Bridgelux Vero LED arrays is in accordance with IEC specification EN62471:Photobiological Safety of Lamps and Lamp Systems. Vero LED arrays are classified as Risk Group 1 (Low Risk) when operated at or below the maximum DC forward current (2x the nominal rated test current as is defined in Table 6 of this data sheet). Please use appropriate precautions. It is important that employees working with LEDs are trained to use them safely.

## CAUTION: RISK OF BURN

Do not touch the Vero LED array or yellow resin area during operation. Allow the array to cool for a sufficient period of time before handling. The Vero LED array may reach elevated temperatures such that could burn skin when touched.

---

## Product Selection Guide

The following product configurations are available:

*Table 1: Selection Guide, Pulsed Measurement Data ( $T_j = T_c = 25^{\circ}\text{C}$ )*

| Part Number       | Nominal CCT (K) | CRI | Test Current (mA) | Typical Pulsed Flux $T_j = 25^{\circ}\text{C}$ (lm) | Typical $V_f$ (V) | Typical Power (W) | Typical Efficacy (lm/W) |
|-------------------|-----------------|-----|-------------------|-----------------------------------------------------|-------------------|-------------------|-------------------------|
| BXRC-27E4000-F-xx | 2700            | 80  | 1050              | 3650                                                | 29.5              | 31.0              | 118                     |
| BXRC-27G4000-F-xx | 2700            | 90  | 1050              | 2920                                                | 29.5              | 31.0              | 94                      |
| BXRC-27H4000-F-xx | 2700            | 97  | 1050              | 2340                                                | 29.5              | 31.0              | 76                      |
| BXRC-30E4000-F-xx | 3000            | 80  | 1050              | 3780                                                | 29.5              | 31.0              | 122                     |
| BXRC-30G4000-F-xx | 3000            | 90  | 1050              | 3100                                                | 29.5              | 31.0              | 100                     |
| BXRC-30H4000-F-xx | 3000            | 97  | 1050              | 2550                                                | 29.5              | 31.0              | 82                      |
| BXRC-35E4000-F-xx | 3500            | 80  | 1050              | 3920                                                | 29.5              | 31.0              | 127                     |
| BXRC-40E4000-F-xx | 4000            | 80  | 1050              | 3990                                                | 29.5              | 31.0              | 129                     |
| BXRC-50C4000-F-04 | 5000            | 70  | 1050              | 4400                                                | 29.5              | 31.0              | 142                     |

Notes for Table 1:

1. 2 SDCM & 3SDCM color control options available on 2700K, 3000K, 3500K and 4000K configurations.
2. 4 SDCM color control options available on 5000K configurations.
3. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
4. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

---

## Product Selection Guide (continued)

*Table 2: Selection Guide, Stabilized DC Performance ( $T_c = 85^\circ\text{C}$ )*

| Part Number       | Nominal CCT (K) | CRI | Test Current (mA) | Typical DC Flux $T_c = 85^\circ\text{C}$ (lm) <sup>[1,2]</sup> | Typical $V_f$ (V) | Typical Power (W) | Typical Efficacy (lm/W) |
|-------------------|-----------------|-----|-------------------|----------------------------------------------------------------|-------------------|-------------------|-------------------------|
| BXRC-27E4000-F-xx | 2700            | 80  | 1050              | 3150                                                           | 27.9              | 29.3              | 108                     |
| BXRC-27G4000-F-xx | 2700            | 90  | 1050              | 2530                                                           | 27.9              | 29.3              | 86                      |
| BXRC-27H4000-F-xx | 2700            | 97  | 1050              | 2020                                                           | 27.9              | 29.3              | 69                      |
| BXRC-30E4000-F-xx | 3000            | 80  | 1050              | 3270                                                           | 27.9              | 29.3              | 112                     |
| BXRC-30G4000-F-xx | 3000            | 90  | 1050              | 2680                                                           | 27.9              | 29.3              | 91                      |
| BXRC-30H4000-F-xx | 3000            | 97  | 1050              | 2200                                                           | 27.9              | 29.3              | 75                      |
| BXRC-35E4000-F-xx | 3500            | 80  | 1050              | 3390                                                           | 27.9              | 29.3              | 116                     |
| BXRC-40E4000-F-xx | 4000            | 80  | 1050              | 3450                                                           | 27.9              | 29.3              | 118                     |
| BXRC-50C4000-F-04 | 5000            | 70  | 1050              | 3810                                                           | 27.9              | 29.3              | 130                     |

Notes for Table 2:

1. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
2. Typical performance when driven under DC (direct current) at test current with LED array case temperature maintained at  $85^\circ\text{C}$ , mounted to heat sink with thermal interface material. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
3. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
4. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

## Typical Performance at Alternative Drive Currents

Vero LED arrays are tested to the specifications shown in Tables 4 and 5. Vero may also be driven at alternative drive currents dependent on specific application design requirements. Typical performance at any drive current can be derived from the current vs. voltage characteristics shown in Figure 1 and the flux vs. current characteristics shown in Figure 2. Typical performance at common drive currents is summarized in Table 3.

*Table 3: Typical Product Performance at Alternative Drive Currents*

| Part Number       | CRI | Current<br>(mA) <sup>[1]</sup> | Typical V <sub>f</sub><br>T <sub>j</sub> = 25°C<br>(V) | Typical Watt<br>T <sub>j</sub> = 25°C<br>(W) | Typical Flux<br>T <sub>j</sub> = 25°C<br>(lm) <sup>[2,3]</sup> | Typical DC Flux<br>T <sub>c</sub> = 85°C<br>(lm) <sup>[2,3]</sup> | Typical Efficacy<br>T <sub>j</sub> = 25°C<br>(lm/W) |
|-------------------|-----|--------------------------------|--------------------------------------------------------|----------------------------------------------|----------------------------------------------------------------|-------------------------------------------------------------------|-----------------------------------------------------|
| BXRC-27E4000-F-xx | 80  | 350                            | 27.1                                                   | 9.5                                          | 1320                                                           | 1170                                                              | 139                                                 |
|                   |     | 700                            | 28.4                                                   | 19.9                                         | 2520                                                           | 2210                                                              | 127                                                 |
|                   |     | <b>1050</b>                    | <b>29.5</b>                                            | <b>31.0</b>                                  | <b>3650</b>                                                    | <b>3150</b>                                                       | <b>118</b>                                          |
|                   |     | 1400                           | 30.4                                                   | 42.6                                         | 4710                                                           | 4020                                                              | 111                                                 |
|                   |     | 2100                           | 31.6                                                   | 66.3                                         | 6770                                                           | 5590                                                              | 102                                                 |
| BXRC-27G4000-F-xx | 90  | 350                            | 27.1                                                   | 9.5                                          | 1060                                                           | 940                                                               | 112                                                 |
|                   |     | 700                            | 28.4                                                   | 19.9                                         | 2020                                                           | 1770                                                              | 102                                                 |
|                   |     | <b>1050</b>                    | <b>29.5</b>                                            | <b>31.0</b>                                  | <b>2920</b>                                                    | <b>2530</b>                                                       | <b>94</b>                                           |
|                   |     | 1400                           | 30.4                                                   | 42.6                                         | 3780                                                           | 3220                                                              | 89                                                  |
|                   |     | 2100                           | 31.6                                                   | 66.3                                         | 5430                                                           | 4480                                                              | 82                                                  |
| BXRC-27H4000-F-xx | 97  | 350                            | 27.1                                                   | 9.5                                          | 840                                                            | 750                                                               | 89                                                  |
|                   |     | 700                            | 28.4                                                   | 19.9                                         | 1620                                                           | 1420                                                              | 81                                                  |
|                   |     | <b>1050</b>                    | <b>29.5</b>                                            | <b>31.0</b>                                  | <b>2340</b>                                                    | <b>2020</b>                                                       | <b>76</b>                                           |
|                   |     | 1400                           | 30.4                                                   | 42.6                                         | 3020                                                           | 2580                                                              | 71                                                  |
|                   |     | 2100                           | 31.6                                                   | 66.3                                         | 4340                                                           | 3590                                                              | 65                                                  |
| BXRC-30E4000-F-xx | 80  | 350                            | 27.1                                                   | 9.5                                          | 1370                                                           | 1210                                                              | 145                                                 |
|                   |     | 700                            | 28.4                                                   | 19.9                                         | 2620                                                           | 2290                                                              | 132                                                 |
|                   |     | <b>1050</b>                    | <b>29.5</b>                                            | <b>31.0</b>                                  | <b>3780</b>                                                    | <b>3270</b>                                                       | <b>122</b>                                          |
|                   |     | 1400                           | 30.4                                                   | 42.6                                         | 4890                                                           | 4170                                                              | 115                                                 |
|                   |     | 2100                           | 31.6                                                   | 66.3                                         | 7020                                                           | 5800                                                              | 106                                                 |
| BXRC-30G4000-F-xx | 90  | 350                            | 27.1                                                   | 9.5                                          | 1120                                                           | 990                                                               | 118                                                 |
|                   |     | 700                            | 28.4                                                   | 19.9                                         | 2140                                                           | 1880                                                              | 108                                                 |
|                   |     | <b>1050</b>                    | <b>29.5</b>                                            | <b>31.0</b>                                  | <b>3100</b>                                                    | <b>2680</b>                                                       | <b>100</b>                                          |
|                   |     | 1400                           | 30.4                                                   | 42.6                                         | 4000                                                           | 3410                                                              | 94                                                  |
|                   |     | 2100                           | 31.6                                                   | 66.3                                         | 5750                                                           | 4750                                                              | 87                                                  |
| BXRC-30H4000-F-xx | 97  | 350                            | 27.1                                                   | 9.5                                          | 920                                                            | 810                                                               | 97                                                  |
|                   |     | 700                            | 28.4                                                   | 19.9                                         | 1760                                                           | 1540                                                              | 89                                                  |
|                   |     | <b>1050</b>                    | <b>29.5</b>                                            | <b>31.0</b>                                  | <b>2550</b>                                                    | <b>2200</b>                                                       | <b>82</b>                                           |
|                   |     | 1400                           | 30.4                                                   | 42.6                                         | 3290                                                           | 2800                                                              | 77                                                  |
|                   |     | 2100                           | 31.6                                                   | 66.3                                         | 4730                                                           | 3900                                                              | 71                                                  |
| BXRC-35E4000-F-xx | 80  | 350                            | 27.1                                                   | 9.5                                          | 1420                                                           | 1260                                                              | 150                                                 |
|                   |     | 700                            | 28.4                                                   | 19.9                                         | 2710                                                           | 2380                                                              | 136                                                 |
|                   |     | <b>1050</b>                    | <b>29.5</b>                                            | <b>31.0</b>                                  | <b>3920</b>                                                    | <b>3390</b>                                                       | <b>127</b>                                          |
|                   |     | 1400                           | 30.4                                                   | 42.6                                         | 5070                                                           | 4320                                                              | 119                                                 |
|                   |     | 2100                           | 31.6                                                   | 66.3                                         | 7280                                                           | 6010                                                              | 110                                                 |
| BXRC-40E4000-F-xx | 80  | 350                            | 27.1                                                   | 9.5                                          | 1440                                                           | 1280                                                              | 152                                                 |
|                   |     | 700                            | 28.4                                                   | 19.9                                         | 2760                                                           | 2420                                                              | 139                                                 |
|                   |     | <b>1050</b>                    | <b>29.5</b>                                            | <b>31.0</b>                                  | <b>3990</b>                                                    | <b>3450</b>                                                       | <b>129</b>                                          |
|                   |     | 1400                           | 30.4                                                   | 42.6                                         | 5160                                                           | 4400                                                              | 121                                                 |
|                   |     | 2100                           | 31.6                                                   | 66.3                                         | 7410                                                           | 6120                                                              | 112                                                 |
| BXRC-50C4000-F-04 | 70  | 350                            | 27.1                                                   | 9.5                                          | 1590                                                           | 1410                                                              | 168                                                 |
|                   |     | 700                            | 28.4                                                   | 19.9                                         | 3050                                                           | 2670                                                              | 153                                                 |
|                   |     | <b>1050</b>                    | <b>29.5</b>                                            | <b>31.0</b>                                  | <b>4400</b>                                                    | <b>3810</b>                                                       | <b>142</b>                                          |
|                   |     | 1400                           | 30.4                                                   | 42.6                                         | 5690                                                           | 4850                                                              | 134                                                 |
|                   |     | 2100                           | 31.6                                                   | 66.3                                         | 8170                                                           | 6750                                                              | 123                                                 |

Notes for Table 3:

1. Product is tested and binned at the rated (nominal) test current included in Table 4 and indicated in **bold** font and blue highlighted rows in the table above.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

## Flux Characteristics

*Table 4: Flux Characteristics*

| CCT (K) | Part Number       | CRI (min) <sup>[3]</sup> | Test Current (mA) <sup>[1]</sup> | Typical Pulsed Flux<br>$T_j = 25^\circ\text{C}$<br>(lm) <sup>[1]</sup> | Minimum Pulsed Flux<br>$T_j = 25^\circ\text{C}$<br>(lm) <sup>[1,2,8]</sup> | Typical Center Beam Candle Power<br>$T_j = 25^\circ\text{C}$<br>(cd) <sup>[4]</sup> | Typical DC Flux<br>$T_c = 85^\circ\text{C}$<br>(lm) <sup>[5,6]</sup> | Minimum DC Flux<br>$T_c = 85^\circ\text{C}$<br>(lm) <sup>(7)</sup> |
|---------|-------------------|--------------------------|----------------------------------|------------------------------------------------------------------------|----------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------|--------------------------------------------------------------------|
| 2700    | BXRC-27E4000-F-xx | 80                       | 1050                             | 3650                                                                   | 3310                                                                       | 1160                                                                                | 3150                                                                 | 2870                                                               |
|         | BXRC-27G4000-F-xx | 90                       | 1050                             | 2920                                                                   | 2660                                                                       | 930                                                                                 | 2530                                                                 | 2300                                                               |
|         | BXRC-27H4000-F-xx | 97                       | 1050                             | 2340                                                                   | 2130                                                                       | 740                                                                                 | 2020                                                                 | 1840                                                               |
| 3000    | BXRC-30E4000-F-xx | 80                       | 1050                             | 3780                                                                   | 3440                                                                       | 1200                                                                                | 3270                                                                 | 2970                                                               |
|         | BXRC-30G4000-F-xx | 90                       | 1050                             | 3100                                                                   | 2810                                                                       | 990                                                                                 | 2680                                                                 | 2430                                                               |
|         | BXRC-30H4000-F-xx | 97                       | 1050                             | 2550                                                                   | 2310                                                                       | 810                                                                                 | 2200                                                                 | 2000                                                               |
| 3500    | BXRC-35E4000-F-xx | 80                       | 1050                             | 3920                                                                   | 3560                                                                       | 1250                                                                                | 3390                                                                 | 3080                                                               |
| 4000    | BXRC-40E4000-F-xx | 80                       | 1050                             | 3990                                                                   | 3630                                                                       | 1160                                                                                | 3450                                                                 | 3140                                                               |
| 5000    | BXRC-50C4000-F-04 | 70                       | 1050                             | 4400                                                                   | 4000                                                                       | 1160                                                                                | 3810                                                                 | 3460                                                               |

Notes for Table 4:

1. Parts are tested in pulsed conditions,  $T_j = 25^\circ\text{C}$ . Pulse width is 10 ms at rated test current.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical R9 value for 90 CRI product options is 70. Typical CRI for Decor products is 97 with a minimum R9 of 95.
4. Center beam candle power is a calculated value based on Lambertian radiation pattern at nominal test current.
5. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
6. Typical performance when driven under DC (direct current) at test current with LED array case temperature maintained at  $85^\circ\text{C}$ , mounted to heat sink with thermal interface material. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the environment in which the product is operated.
7. Minimum DC Flux values are provided for reference only and are not a parameter guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
8. Refer to Table 3 for typical performance at other driver currents (including those commonly commercially available).

## Electrical Characteristics

*Table 5: Electrical Characteristics and Driver Selection Voltages*

| Current<br>(mA) <sup>[1]</sup> | Forward Voltage<br>Pulsed, T <sub>j</sub> = 25°C (V) <sup>[1,2]</sup> |             |             | Typical Coefficient<br>of Forward Voltage<br>$\Delta V_f / \Delta T_j$ <sup>[4]</sup> (mV/°C) | Typical Thermal<br>Resistance<br>Junction to Case<br>R $\theta_{j-c}$ (C/W) | Driver Selection Voltages (V) <sup>[3]</sup>          |                                                         |
|--------------------------------|-----------------------------------------------------------------------|-------------|-------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-------------------------------------------------------|---------------------------------------------------------|
|                                | Minimum                                                               | Typical     | Maximum     |                                                                                               |                                                                             | V <sub>f</sub> Min. Hot<br>T <sub>c</sub> = 105°C (V) | V <sub>f</sub> Max. Cold<br>T <sub>c</sub> = - 40°C (V) |
| 350                            | 24.4                                                                  | 27.1        | 29.8        | -21.0                                                                                         | 0.53                                                                        | 22.6                                                  | 31.0                                                    |
| 700                            | 25.6                                                                  | 28.4        | 31.2        | -21.0                                                                                         | 0.54                                                                        | 23.7                                                  | 32.4                                                    |
| <b>1050</b>                    | <b>26.6</b>                                                           | <b>29.5</b> | <b>32.5</b> | <b>-21.0</b>                                                                                  | <b>0.55</b>                                                                 | <b>24.5</b>                                           | <b>33.5</b>                                             |
| 1400                           | 27.4                                                                  | 30.4        | 33.5        | -21.0                                                                                         | 0.56                                                                        | 25.2                                                  | 34.3                                                    |
| 2100                           | 28.4                                                                  | 31.6        | 34.7        | -21.0                                                                                         | 0.58                                                                        | 26.0                                                  | 35.3                                                    |

Notes for Table 5:

1. Parts are tested in pulsed conditions at the rated test current (indicated in bold font), T<sub>j</sub> = 25°C. Pulse width is 10 ms.
2. Bridgelux maintains a tester tolerance of  $\pm 0.10$  V on forward voltage measurements.
3. Forward voltage minimum and maximum values at the rated test current are guaranteed by 100% test. Values provided at alternative drive currents are provided for reference only and are not guaranteed by test.
4. V<sub>f</sub> Min hot and V<sub>f</sub> max cold values are provided as reference only and are not guaranteed by test. These values are provided to aid in driver design and selection over the operating range of the product.
5. Typical Coefficient of Forward Voltage tolerance of  $\pm 10\%$  from nominal current.

---

## Absolute Minimum and Maximum Ratings

*Table 6: Maximum Current and Reverse Voltage Ratings*

| Part Number       | Maximum DC Forward Current (mA) | Maximum Peak Pulsed Current (mA) <sup>[1]</sup> | Maximum Reverse Voltage (V <sub>r</sub> ) <sup>[2]</sup> |
|-------------------|---------------------------------|-------------------------------------------------|----------------------------------------------------------|
| BXRC-27E4000-F-xx | 2100                            | 3000                                            | -50                                                      |
| BXRC-27G4000-F-xx | 2100                            | 3000                                            | -50                                                      |
| BXRC-27H4000-F-xx | 2100                            | 3000                                            | -50                                                      |
| BXRC-30E4000-F-xx | 2100                            | 3000                                            | -50                                                      |
| BXRC-30G4000-F-xx | 2100                            | 3000                                            | -50                                                      |
| BXRC-30H4000-F-xx | 2100                            | 3000                                            | -50                                                      |
| BXRC-35E4000-F-xx | 2100                            | 3000                                            | -50                                                      |
| BXRC-40E4000-F-xx | 2100                            | 3000                                            | -50                                                      |
| BXRC-50C4000-F-04 | 2100                            | 3000                                            | -50                                                      |

Notes for Table 6:

1. Bridgelux recommends a maximum duty cycle of 10% when operating LED Arrays at the maximum peak pulsed current specified. Maximum peak pulsed currents indicate values where the LED array can be driven without catastrophic failures.
2. Light emitting diodes are not designed to be driven in reverse voltage.
3. Lumen maintenance (L70) and lifetime predictions are valid for drive current and case temperature conditions used for LM-80 testing as included in the applicable LM-80 test report for these products. Vero LED arrays can be driven at higher currents but lumen maintenance may be reduced; however, the luminaire design may need to maintain lower T<sub>c</sub> values to meet lumen maintenance capabilities equal to lower drive current operations.

*Table 7: Maximum Ratings*


| Parameter                            | Maximum Rating                    |
|--------------------------------------|-----------------------------------|
| LED Junction Temperature             | 150°C                             |
| Storage Temperature                  | -40°C to +105°C                   |
| Operating Case Temperature           | 105°C                             |
| Soldering Temperature <sup>[1]</sup> | 350°C for a maximum of 10 seconds |

Notes for Table 7:

1. See Bridgelux Application Note AN31, Assembly Considerations for Vero LED arrays, for more information.

## Typical Forward Current Characteristics


*Figure 1: Electrical Characteristics*

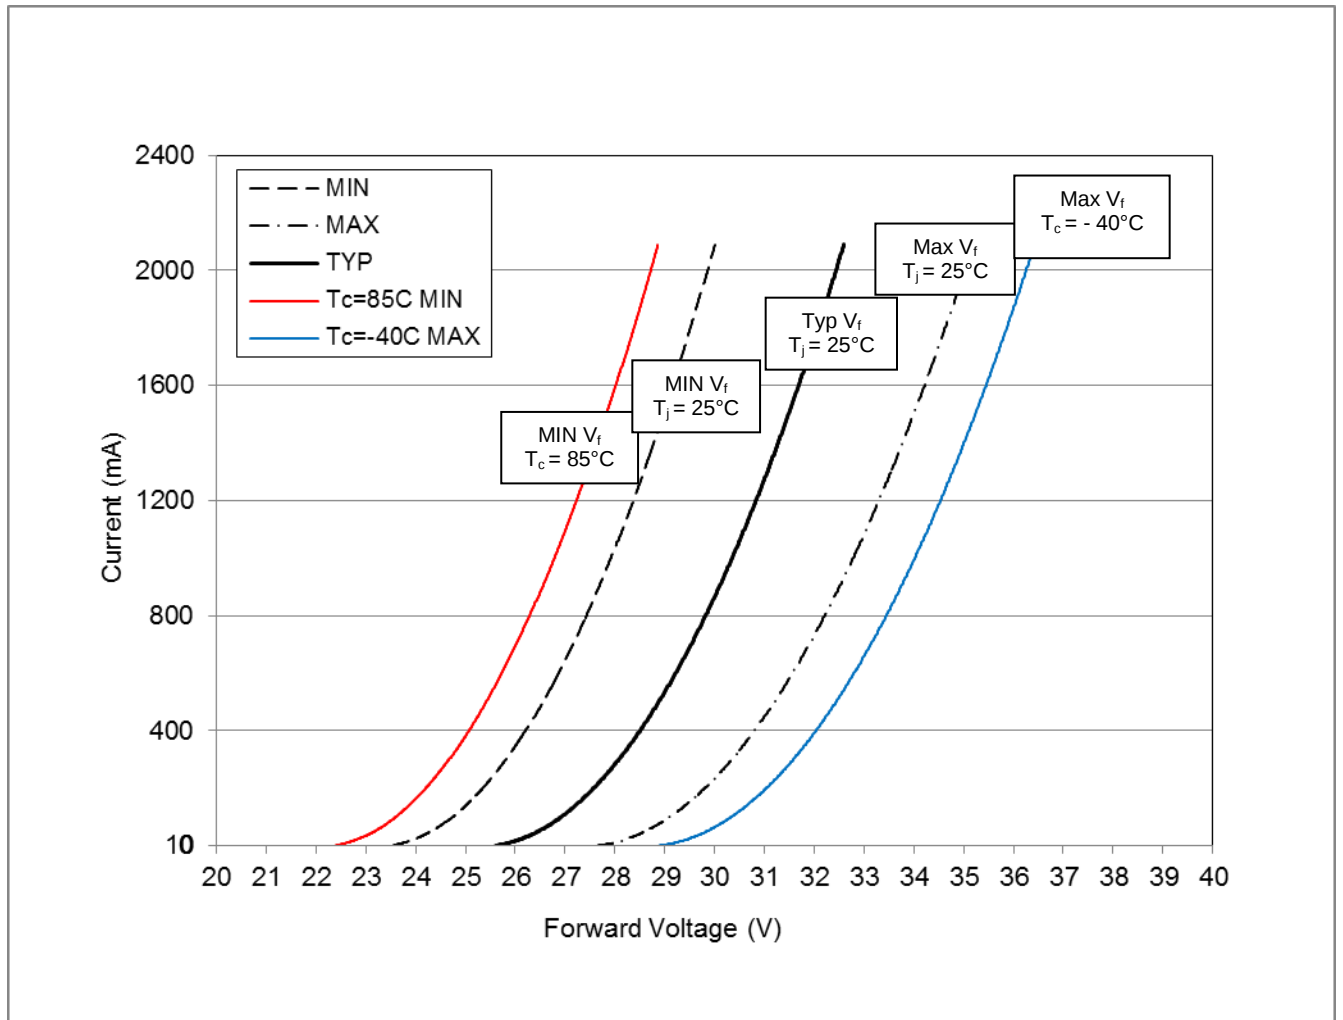

---


## Typical Relative Luminous Flux vs. Current, $T_j=25^{\circ}\text{C}$

*Figure 2: Typical Flux vs. Current,  $T_j = 25^{\circ}\text{C}$*

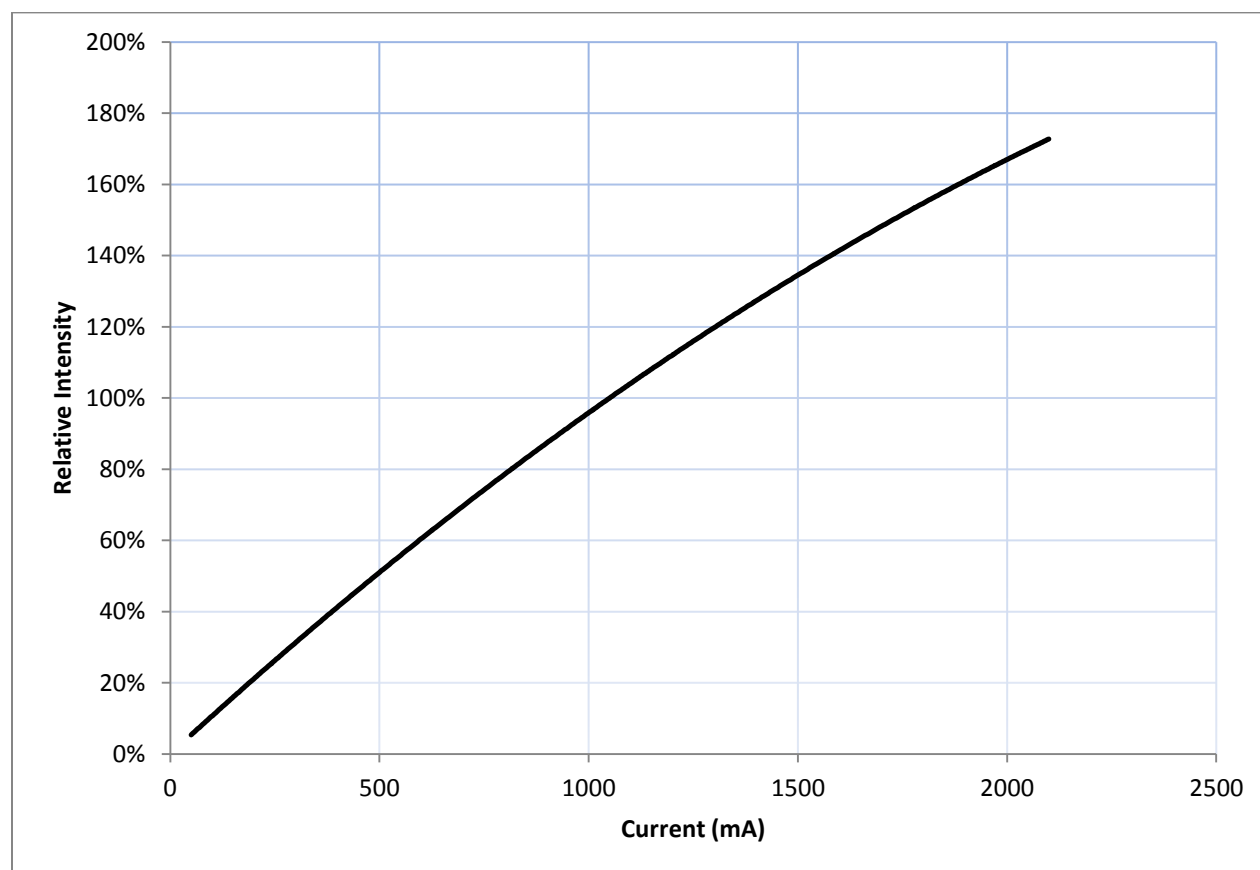

## Typical Light Output Characteristics vs. Temperature

*Figure 3: Typical Flux vs. Junction Temperature*

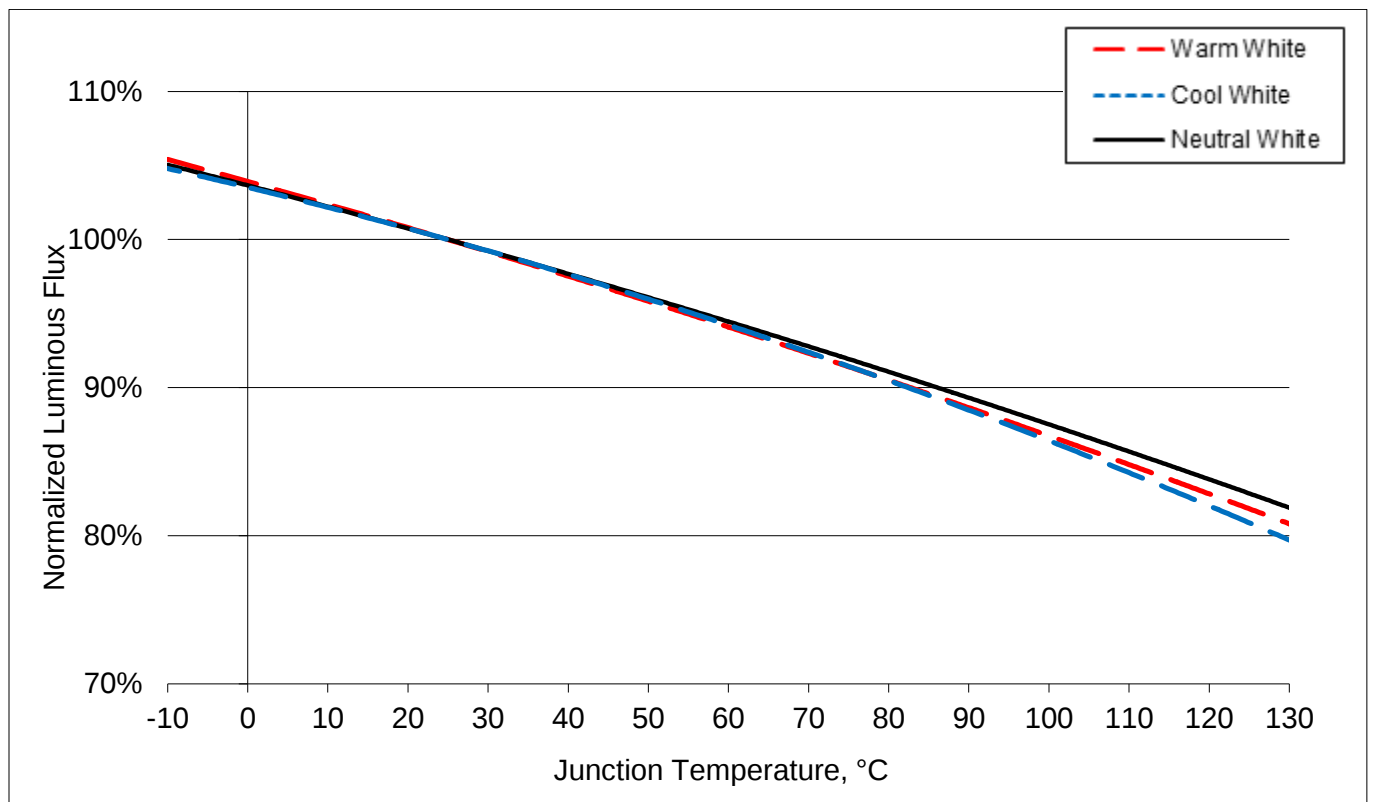


Notes for Figure 3:


1. Characteristics shown for warm white reflect 3000K 80 CRI.
2. Characteristics shown for neutral white reflect 4000K 80 CRI.
3. Characteristics shown for cool white reflect 5000K 70 CRI.

## Typical Chromaticity Characteristics vs. Temperature

*Figure 4: Typical ccy Shift vs. Junction Temperature*

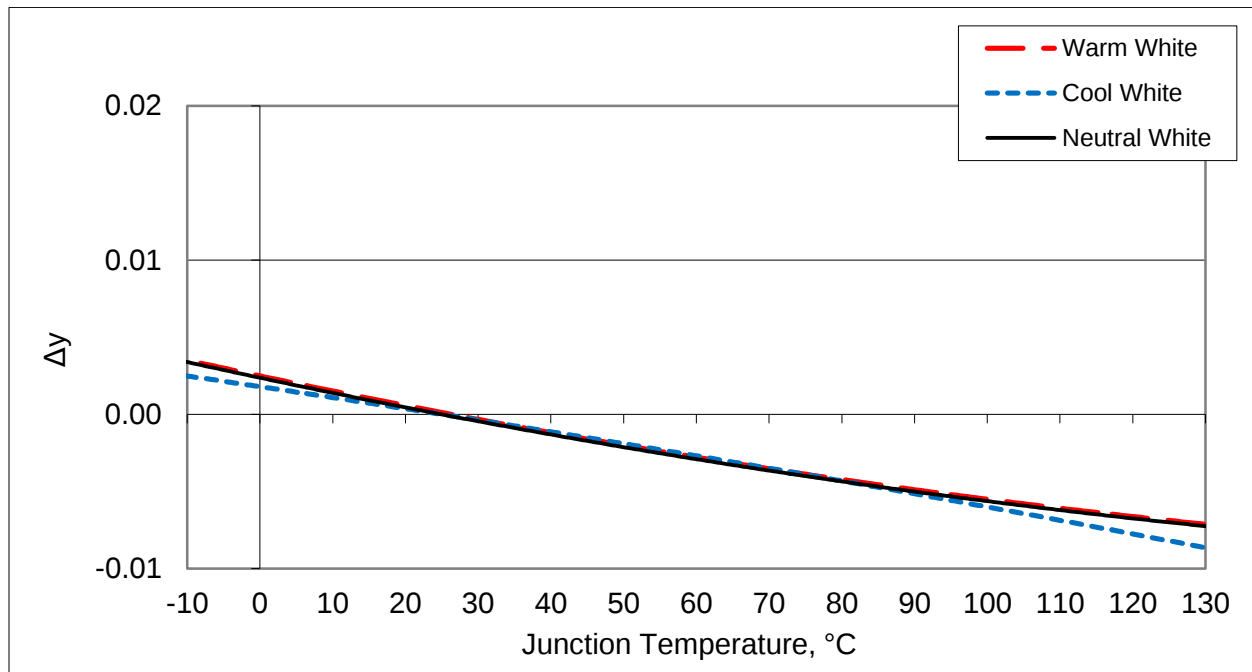

*Figure 5: Typical ccx Shift vs. Junction Temperature*

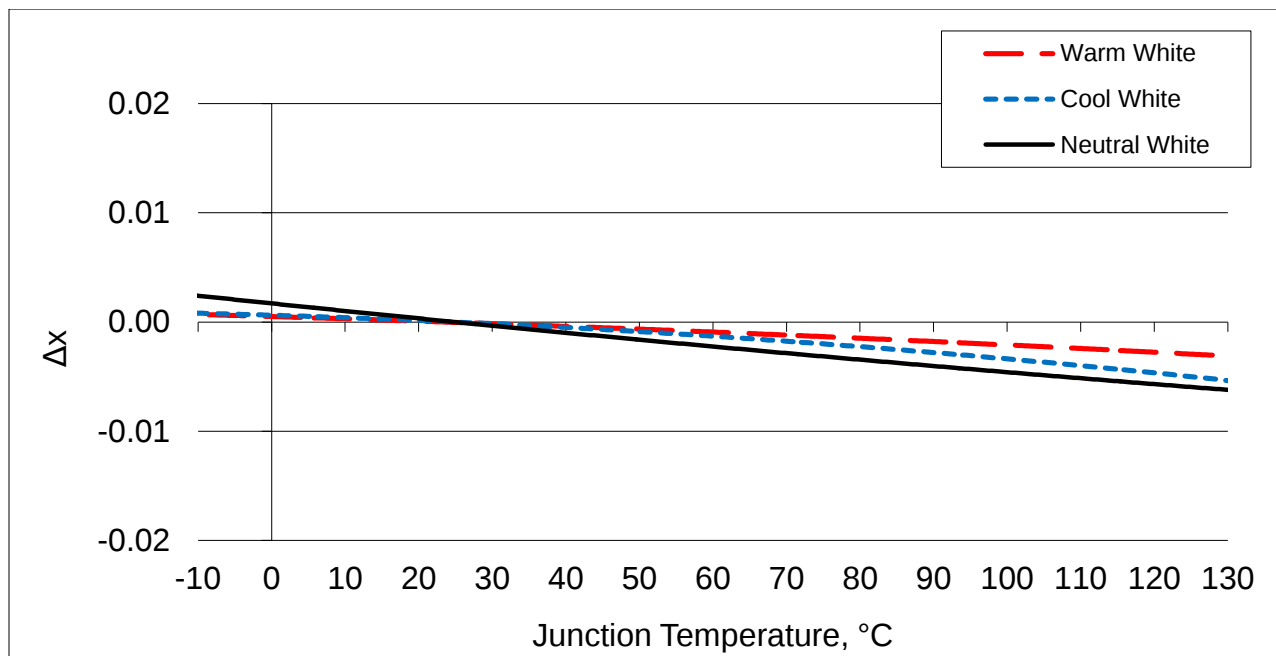


Notes for Figures 4 and 5:

1. Characteristics shown for warm white reflect 3000K 80 CRI.
2. Characteristics shown for neutral white reflect 4000K 80 CRI.
3. Characteristics shown for cool white reflect 5000K 70 CRI.

---

## Optical Characteristics


*Figure 6: Typical Spatial Radiation Pattern*

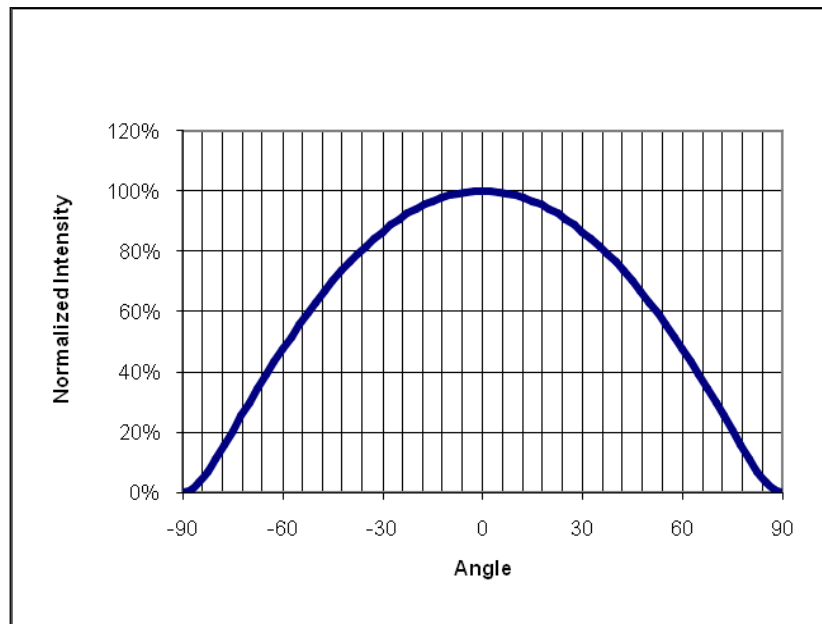

Notes for Figure 6:

1. The typical viewing angle for the Vero 18 LED arrays is 120°.
2. The viewing angle is defined as the off axis angle from the centerline where  $I_v$  is  $\frac{1}{2}$  of the peak value.


*Figure 7: Typical Polar Radiation Pattern*

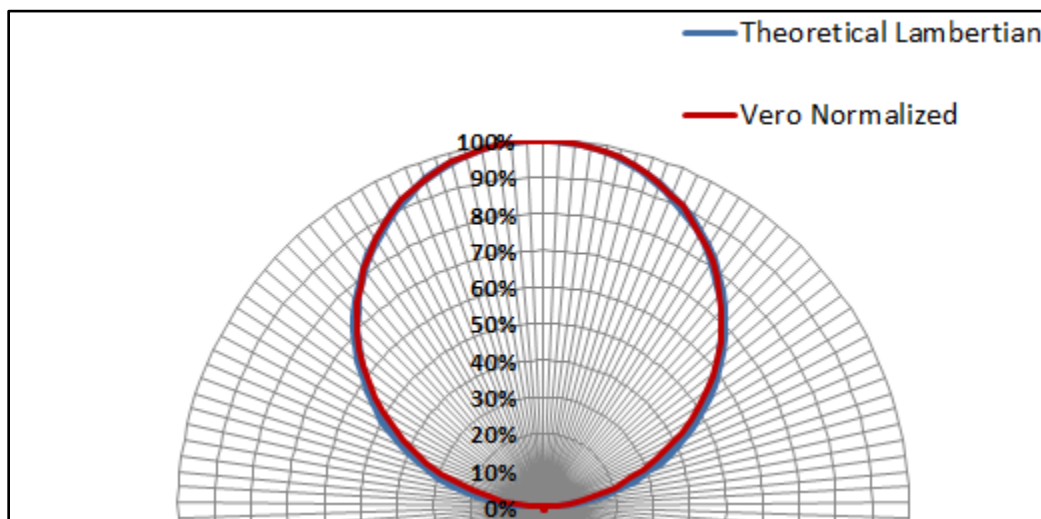

---

## Wavelength Characteristics at Rated Test Current, $T_j=25^{\circ}\text{C}$

*Figure 8: Typical Color Spectrum*

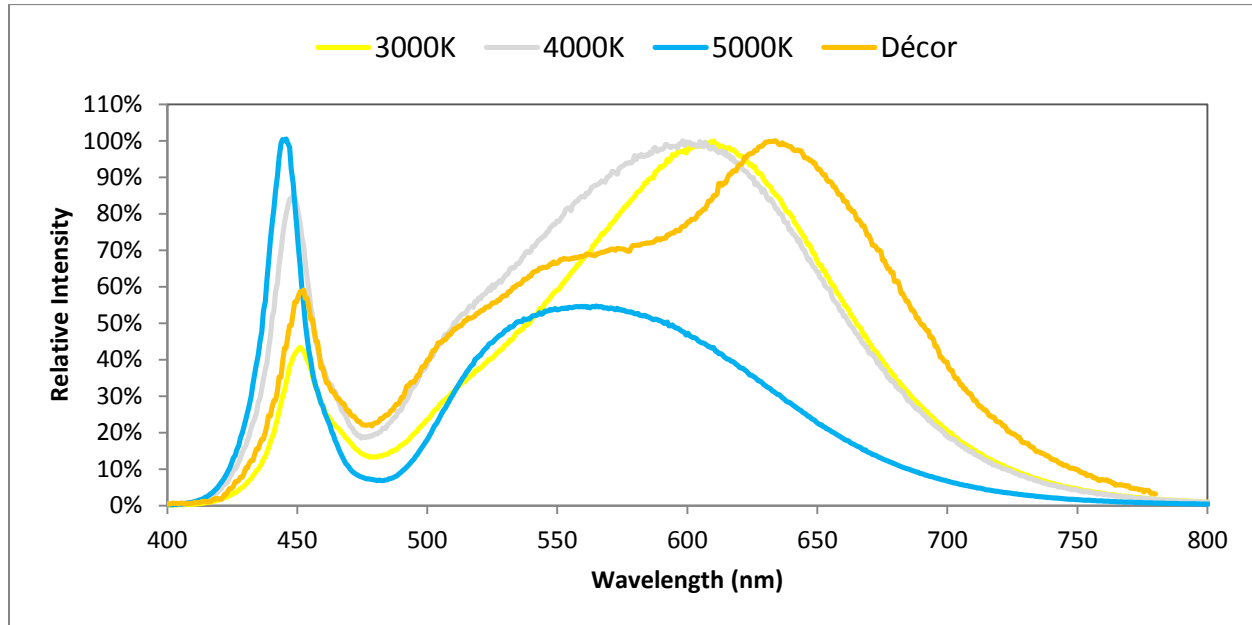


Notes for Figure 8:

1. Color spectrum shown for warm white is 3000K 80 CRI.
2. Color spectrum shown for neutral white is 4000K 80 CRI.
3. Color spectrum shown for cool white is 5000K 70 CRI.

---

Figure 9: Drawing for Vero 18 LED Array

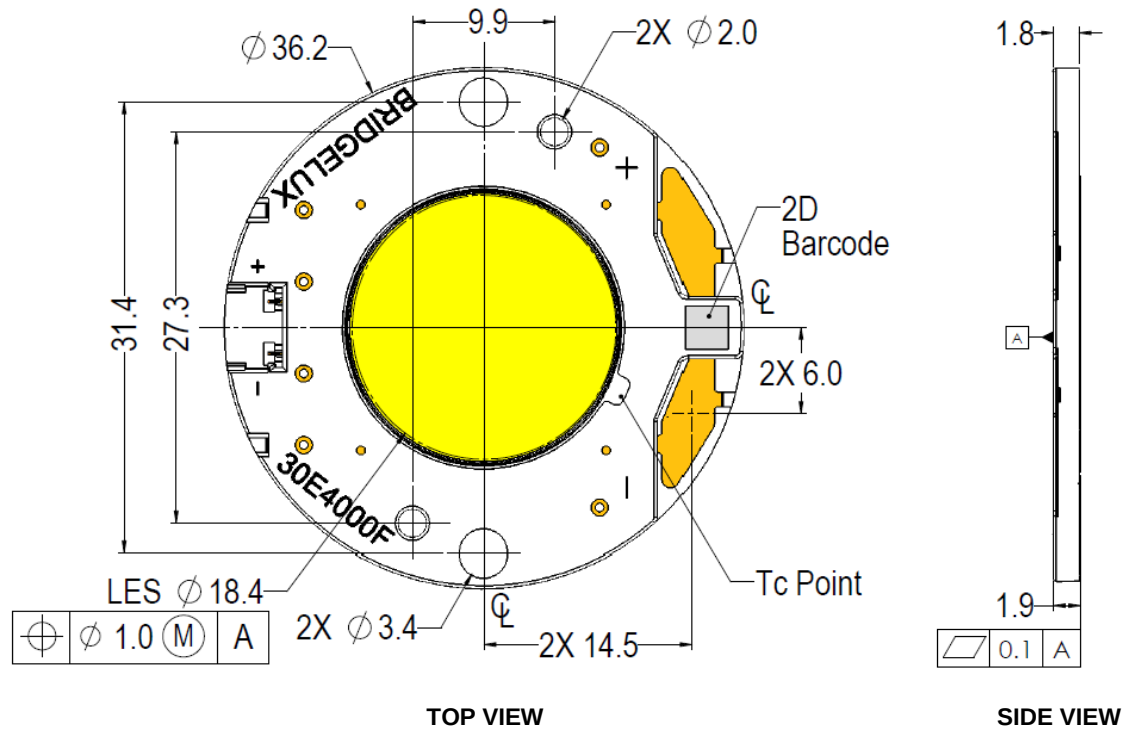


Notes for Figure 9:

1. Mounting holes (2X) are for M2.5 screws.
2. Bridgelux recommends two tapped holes for mounting screws with  $31.4 \pm 0.10$ mm center-to-center spacing.
3. Screws with flat shoulders (pan, dome, button, round, truss, mushroom) provide optimal torque control. Do NOT use flat, countersink, or raised head screws.
4. Solder pads and connector port are labeled "+" and "-" to denote positive and negative, respectively.
5. It is not necessary to provide electrical connections to both the solder pads and the connector port. Either set may be used depending on application specific design requirements.
6. Drawings are not to scale.
7. Drawing dimensions are in millimeters.
8. Unless otherwise specified, tolerances are  $\pm 0.10$ mm.
9. Refer to Application Notes AN30 and AN31 for product handling, mounting and heat sink recommendations.
10. The optical center of the LED Array is nominally defined by the mechanical center of the array to a tolerance of  $\pm 0.45$ mm.
11. Bridgelux maintains a flatness of 0.10mm across the mounting surface of the array.
12. Bridgelux Vero 18 LED arrays are packaged in trays of 20 units with a maximum planar dimension of 215 mm x 279.4 mm (8.5 x 11 inches) per tray.

## Color Control Information

*Figure 10: Graph of Warm White Test Bins in xy Color Space*

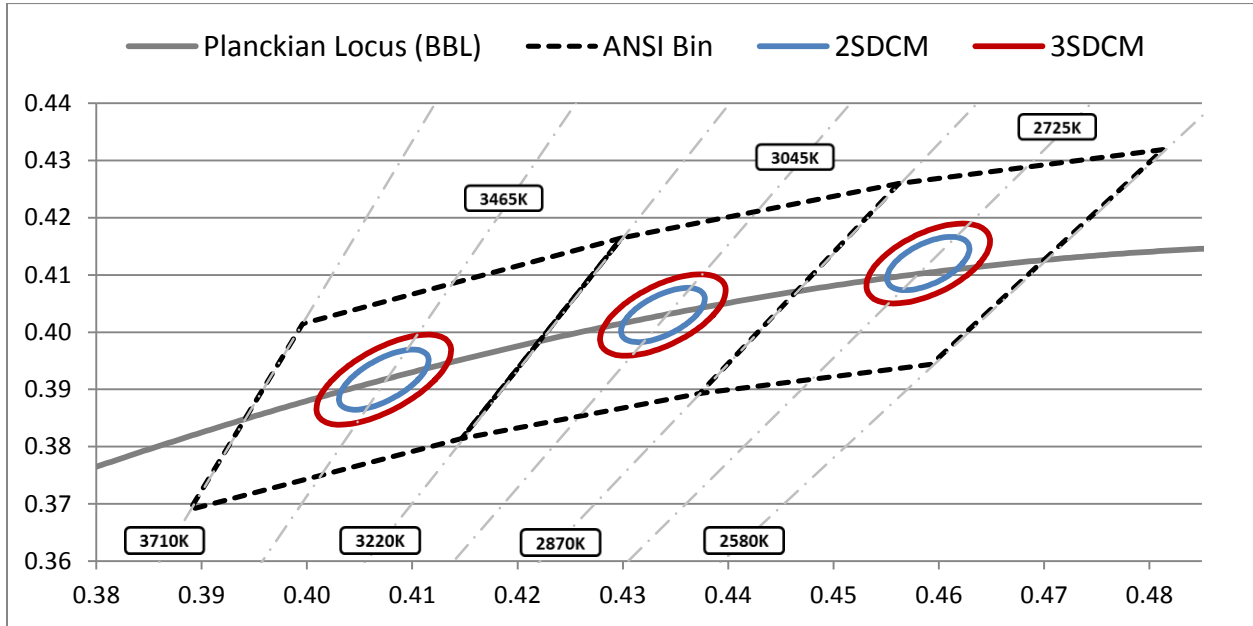


*Table 10: Warm White xy Bin Coordinates and Associated Typical CCT*

| Bin Code                         | 2700K            | 3000K           | 3500K            |
|----------------------------------|------------------|-----------------|------------------|
| ANSI Bin<br>(for reference only) | (2580K - 2870K)  | (2870K - 3220K) | (3220K - 3710K)  |
| 03 (3SDCM)                       | (2651K - 2794K)  | (2968K - 3136K) | (3369K - 3586K)  |
| 02 (2SDCM)                       | (2674K - 2769K)  | (2995K - 3107K) | (3404K - 3548K)  |
| Center Point (x,y)               | (0.4578, 0.4101) | (0.4338, 0.403) | (0.4073, 0.3917) |

## Color Binning Information (continued)

*Figure 11: Graph of Neutral White Test Bins in xy Color Space*

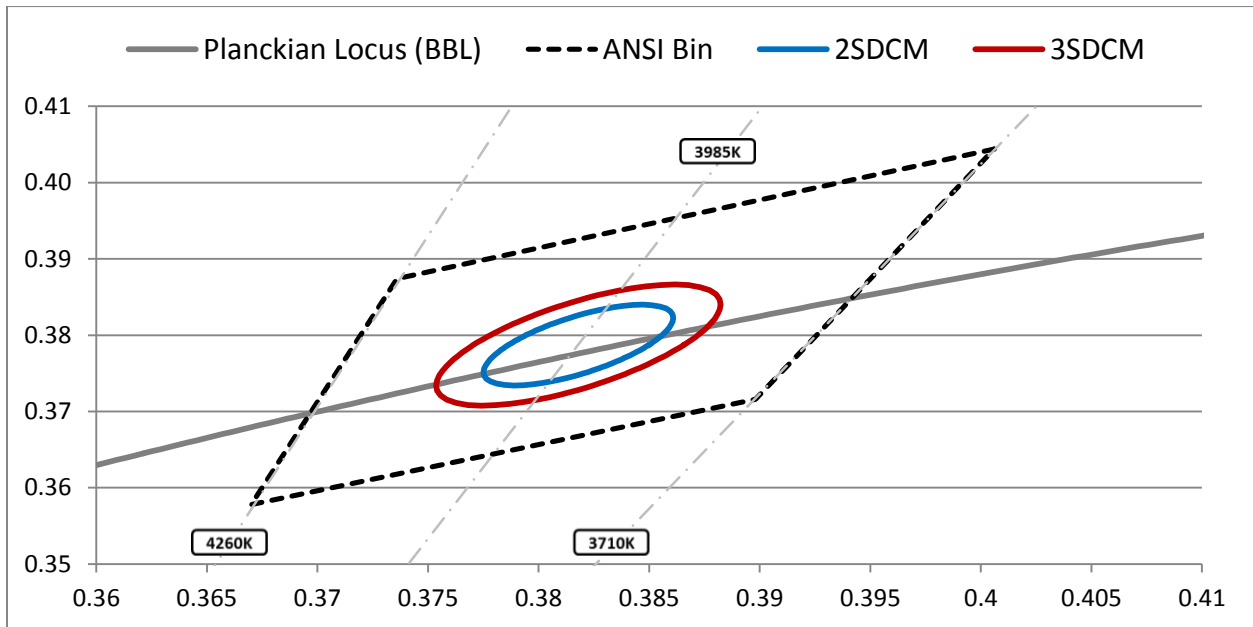


*Table 11: Neutral White xy Bin Coordinates and Associated Typical CCT*

| Bin Code                         | 4000K            |
|----------------------------------|------------------|
| ANSI Bin<br>(for reference only) | (3710K - 4260K)  |
| 03 (3SDCM)                       | (3851K - 4130K)  |
| 02 (2SDCM)                       | (3895K - 4081K)  |
| Center Point (x,y)               | (0.3818, 0.3797) |

## Color Binning Information (continued)

*Figure 12: Graph of Cool White Test Bins in xy Color Space*

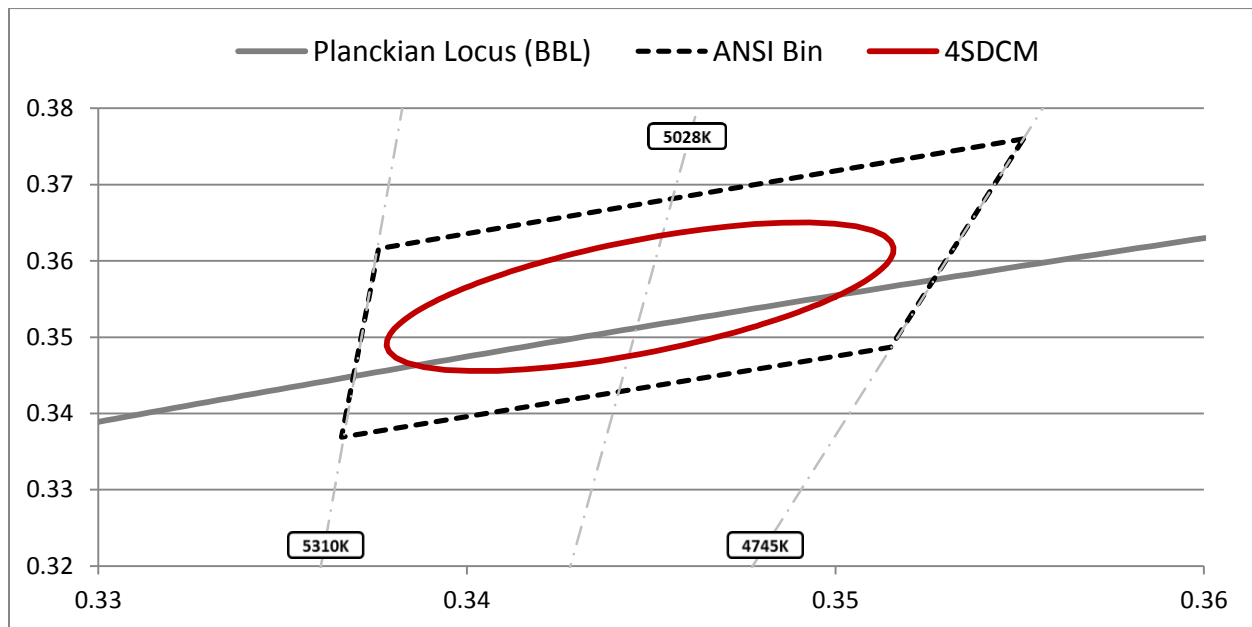

Note: Pulsed Test Conditions,  $T_j = 25^\circ\text{C}$

*Table12: Cool White xy Bin Coordinates and Associated Typical CCT*

| Bin Code                         | 5000K            |
|----------------------------------|------------------|
| ANSI Bin<br>(for reference only) | (4745K - 5311K)  |
| 04 (4SDCM)                       | (4801K - 5282K)  |
| Center Point (x,y)               | (0.3447, 0.3553) |

---

## Design Resources

Bridgelux is developing a comprehensive set of application notes and design resources to assist customers in successfully designing with the Vero product family of LED array products. Included below is a list of resources under development which will be downloaded from the Bridgelux web site under the Design Resources section.

### Application Notes

- AN30: Effective Thermal Management of Bridgelux Vero LED Arrays
- AN31: Assembly Considerations for Bridgelux Vero LED Arrays
- AN32: Electrical Drive Considerations for Bridgelux Vero LED Arrays
- AN34: Reliability Data Sheet for Bridgelux Vero LED Arrays
- AN36: Optical Considerations for Bridgelux Vero LED Arrays

### Optical Source Models

Optical source models and ray set files are available for all Bridgelux Vero LED array products. The list below contains the formats currently available. If you require a specific format not included in this list, please contact your Bridgelux sales representative for assistance.

- Zemax
- ASAP
- IESNA
- LightTools
- LucidShape
- OPTIS SPEOS
- PHOTOPIA
- TracePro
- Radiant Imaging Source Model

### 3D CAD Models

Three dimensional CAD models depicting the product outline of all Bridgelux Vero LED arrays are available in both SAT and STEP formats. Please contact your Bridgelux sales representative for assistance.

---

## About Bridgelux

Bridgelux is a leading developer and manufacturer of technologies and solutions transforming the \$40 billion global lighting industry into a \$100 billion market opportunity. Based in Livermore, California, Bridgelux is a pioneer in solid state lighting (SSL), expanding the market for light emitting diode (LED) technologies by driving down the cost of LED lighting systems. Bridgelux's patented light source technology replaces traditional technologies (such as incandescent, halogen, fluorescent and high intensity discharge lighting) with integrated, solid state lighting solutions that enable lamp and luminaire manufacturers to provide high performance and energy efficient white light for the rapidly growing interior and exterior lighting markets, including street lights, commercial lighting and consumer applications.

For more information about the company, please visit [www.bridgelux.com](http://www.bridgelux.com).

Bridgelux and the Bridgelux stylized logo design are registered trademarks, and Vero and Décor are trademarks, of Bridgelux, Inc. All other trademarks are the property of their respective owners.

