



LOADING PATTERN MATING SIDE

f	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
e	6	6	5	5	5	5	6	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
d	6	6	5	5	5	5	6	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
c	6	6	5	5	5	5	6	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
b	6	6	5	5	5	5	6	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
a	6	6	5	5	5	5	6	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
z	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
P	0						0															
O	1						5															
S																						


LOADED CONNECTOR ASSEMBLY
(FOR EXAMPLE)

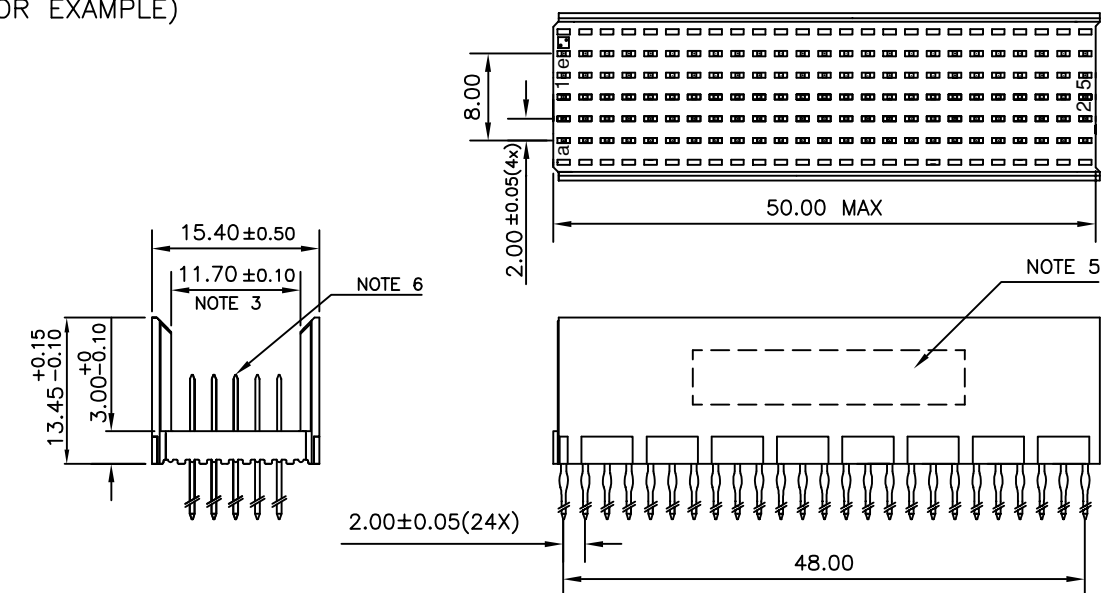

CONTACT OVERVIEW

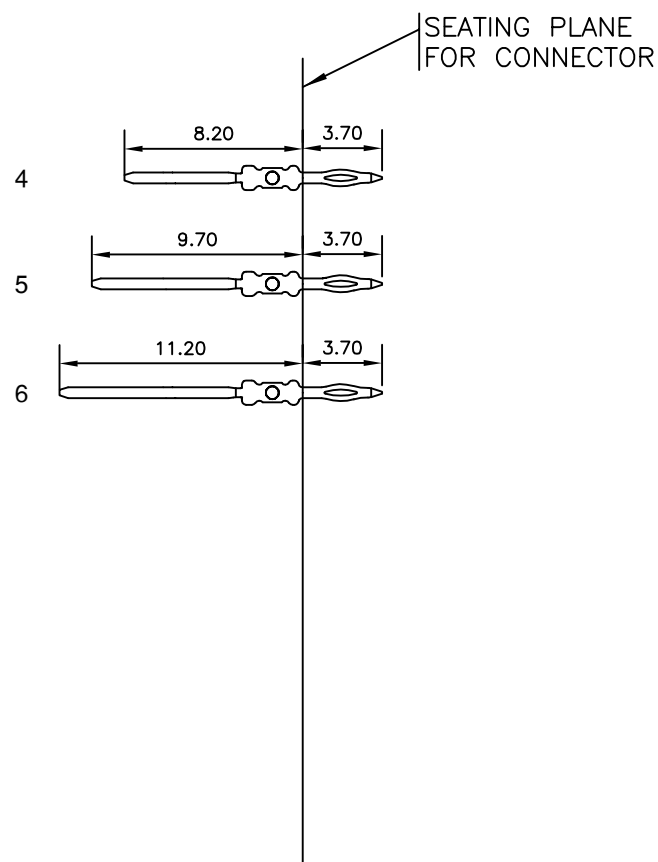

LAY-OUT P.C.B.-HOLE

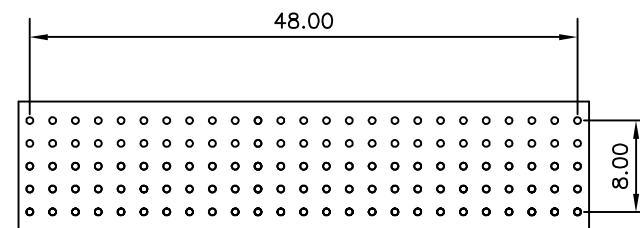

HM2P08PDE310

LEAD FREE INDICATOR : LF = LEAD FREE
(DIGIT 15 & 16)

PLATING CODE (DIGIT 13 AND 14)
(REF DRW NO. BS,C , 201844 , 003)

NOTES

- THIS PRODUCT IS CSA APPROVED.
- THIS PRODUCT IS UL RECOGNIZED.
- MEASURED AT THE BOTTOM.
- MATERIAL CONTACT: PHOSPHORBRONZE
HOUSING: CREAM WHITE GLASS FILLED POLYESTER UL-94V0
- CONNECTOR PRINTED WITH P/N AND DATE CODE.
- FOR ACTUAL CONTACT LOADINGS, SEE LOADING PATTERN MATING SIDE.
- SHAPE OF CONNECTOR HOUSING CAN ALTER DEPENDING ON PRODUCTION LOCATION
- THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS, A , 201572 , 001

CATALOG NO: HM2P08PDE310----

mat'l. code SEE NOTE 4				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection MM	product family MILLIPACS			
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM	title MPACS 5+2R STR HDR PF CONN TYPE B			
A	I04-0027	MINI	2004/04/07	angles	linear					
B	I05-0188	MINI	2005/10/13	0°±1°						
C	I06-0077	MINI	2006/06/26	dr	MINI K VANDANATH	2004/04/07	dwg no BS, C ,203028,125			
				enr	BIJU K PAUL	2004/04/07				
				chr	BIJU K PAUL	2006/06/26				
				appd	BIJU K PAUL	2006/06/26	type Product Customer Drawing			
sheet	revision	C								
index	sheet	1								