




ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	19.0	± max
T:	5.1	± max
Lead Diameter	1.0	± nom
S:	7.8	± nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)	3.0	± max
B:	7.50	± nom
C:	3.85	± nom

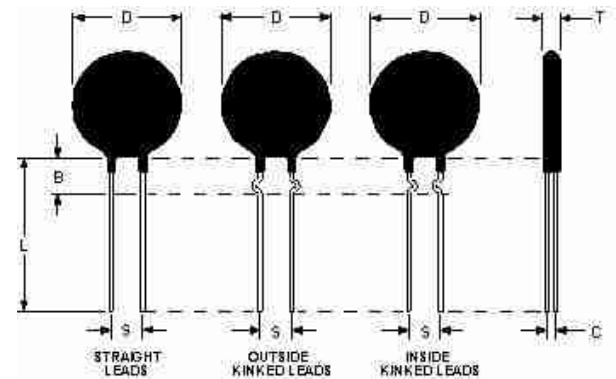

Electrical Specifications

Resistance:	2.5	Ω	± 20 %
Max Steady State Current upto 65°C:	8.00	A	
Max Rec. Energy Rating:	90	J	
Actual Failure Instantaneous Energy:	180	J	
Maximum Capacitance @ 120 VAC:	6,251	μ f	
Maximum Capacitance @ 240 VAC:	1,562	μ f	
Resistance @ 100% Max Current:	0.06	Ω	
Resistance @ 50% Max Current:	0.14	Ω	
Body Temperature at 100% Max Current:	180.00	°C	
Dissipation Constant:	25.0	mw/°C	
Thermal Time Constant:	100	Sec.	
Material Type (for Beta and Curve):	B		

SL18 2R508

Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: a

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ametherm:](#)

[SL18 2R508](#)