


## Lead (Pb)-Free Thick Film Chip Resistors with CECC Approval, Available with Established Reliability



### FEATURES

- Approved to EN 140401-802, version E, with established reliability, failure rate level E6
- Approved to EN 140401-802, version A, without failure rate level
- Compliant to RoHS Directive 2002/95/EC

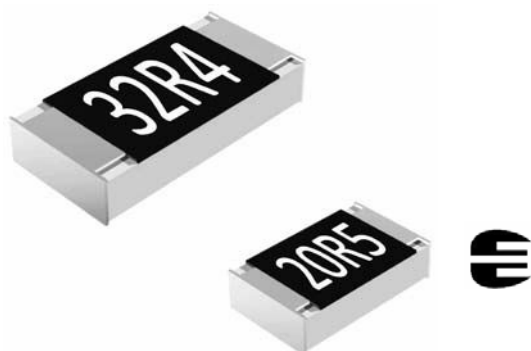

### APPLICATIONS

- Military
- Avionics
- Industrial

### TECHNICAL SPECIFICATIONS

| DESCRIPTION                                                                            | CRCW0805 EN802..                                 | CRCW1206 EN802.. |
|----------------------------------------------------------------------------------------|--------------------------------------------------|------------------|
| Imperial size                                                                          | 0805                                             | 1206             |
| EN/CECC style                                                                          | RR2012M                                          | RR3216M          |
| Resistance range                                                                       | 1 $\Omega$ to 1 M $\Omega$ ; 0 $\Omega$          |                  |
| Resistance tolerance                                                                   | $\pm 5\%$ , $\pm 1\%$                            |                  |
| Temperature coefficient                                                                | $\pm 200$ ppm/K, $\pm 100$ ppm/K, $\pm 50$ ppm/K |                  |
| Rated dissipation, $P_{70}$                                                            | 0.125 W                                          | 0.25 W           |
| Operating voltage, $U_{max}$ , AC <sub>RMS</sub> or DC                                 | 150 V                                            | 200 V            |
| Permissible Film temperature, $\vartheta_{F max}$                                      | 125 °C                                           |                  |
| Operating temperature range                                                            | - 55 °C to + 125 °C                              |                  |
| Max. resistance change at $P_{70}$<br>for resistance range, $ \Delta R/R $ max. after: | 10 $\Omega$ to 1 M $\Omega$                      |                  |
| 1000 h                                                                                 | $\leq 0.5\%$                                     |                  |
| 8000 h                                                                                 | $\leq 1\%$                                       |                  |
| Insulation resistance                                                                  | $\geq 1$ G $\Omega$                              |                  |
| Permissible voltage against ambient<br>(insulation):                                   |                                                  |                  |
| 1 min; $U_{ins}$                                                                       | 200 V                                            | 300 V            |

#### Note

- These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime.

### TECHNICAL SPECIFICATIONS for "Version A"

| DESCRIPTION                           | CRCW0805 EN802 E0        | CRCW1206 EN802 E0 |
|---------------------------------------|--------------------------|-------------------|
| Nominal failure rate level            | E0                       |                   |
| Quality factor, $\pi_Q$               | 3                        |                   |
| Failure rate, FIT <sub>observed</sub> | $< 0.1 \times 10^{-9}/h$ |                   |

### TECHNICAL SPECIFICATIONS for "Version E"

| DESCRIPTION                           | CRCW0805 EN802 E6        | CRCW1206 EN802 E6 |
|---------------------------------------|--------------------------|-------------------|
| Assessed failure rate level           | E6 = $10^{-6}/h$         |                   |
| Quality factor, $\pi_Q$               | 0.3                      |                   |
| Failure rate, FIT <sub>observed</sub> | $< 0.1 \times 10^{-9}/h$ |                   |

#### Note

- Failure rate level E6 ( $10^{-6}/h$ ,  $\pi_Q = 0.3$ ), equivalent to MIL level P, is superior to level E5 ( $10^{-5}/h$ ,  $\pi_Q = 1$ ) and thus can be used as a replacement.

**TEMPERATURE COEFFICIENT AND RESISTANCE RANGE** for “Version A”

| TCR         | TOLERANCE | RESISTANCE RANGE                                               |                                                                |
|-------------|-----------|----------------------------------------------------------------|----------------------------------------------------------------|
|             |           | CRCW0805 EN802 E0                                              | CRCW1206 EN802 E0                                              |
| ± 200 ppm/K | ± 5 %     | 1 Ω to 1 MΩ                                                    | 1 Ω to 1 MΩ                                                    |
| ± 100 ppm/K | ± 1 %     | 10 Ω to 1 MΩ                                                   | 10 Ω to 1 MΩ                                                   |
| ± 50 ppm/K  | ± 1 %     | 100 Ω to 1 MΩ                                                  | 100 Ω to 1 MΩ                                                  |
| Jumper      |           | $R_{res} \leq 20 \text{ m}\Omega$ ; $I_{max.} = 1.5 \text{ A}$ | $R_{res} \leq 20 \text{ m}\Omega$ ; $I_{max.} = 2.0 \text{ A}$ |

**Note**

- Resistance values of version A products (nominal failure rate E0) are available according to the E24 series for ± 5 % tolerance and according to the E24 and E96 series for ± 1 % tolerance.

**TEMPERATURE COEFFICIENT AND RESISTANCE RANGE** for “Version E”

| TCR         | TOLERANCE | RESISTANCE RANGE                                               |                                                                |
|-------------|-----------|----------------------------------------------------------------|----------------------------------------------------------------|
|             |           | CRCW0805 EN802 E6                                              | CRCW1206 EN802 E6                                              |
| ± 200 ppm/K | ± 5 %     | 1.0 Ω to 9.1 Ω                                                 | 1.0 Ω to 9.1 Ω                                                 |
| ± 100 ppm/K | ± 1 %     | 10 Ω to 1 MΩ                                                   | 10 Ω to 1 MΩ                                                   |
| ± 50 ppm/K  | ± 1 %     | 100 Ω to 1 MΩ                                                  | 100 Ω to 1 MΩ                                                  |
| Jumper      |           | $R_{res} \leq 20 \text{ m}\Omega$ ; $I_{max.} = 1.5 \text{ A}$ | $R_{res} \leq 20 \text{ m}\Omega$ ; $I_{max.} = 2.0 \text{ A}$ |

**Note**

- According to EN 140401-802, resistance values of version E products (failure rate E6) are to be selected from the E24 series for ± 5 % tolerance and from the E96 series for ± 1 % tolerance.

**PART NUMBER AND PRODUCT DESCRIPTION**

Part Number: CRCW0805562RFKEAE6

|                      |   |                                                             |   |                                      |   |                                                                    |   |                |   |                                      |   |   |   |   |   |   |   |
|----------------------|---|-------------------------------------------------------------|---|--------------------------------------|---|--------------------------------------------------------------------|---|----------------|---|--------------------------------------|---|---|---|---|---|---|---|
| C                    | R | C                                                           | W | 0                                    | 8 | 0                                                                  | 5 | 5              | 6 | 2                                    | R | F | K | E | A | E | 6 |
| MODEL/SIZE           |   | RESISTANCE                                                  |   | TOLERANCE                            |   | TCR                                                                |   | PACKAGING      |   | SPECIAL                              |   |   |   |   |   |   |   |
| CRCW0805<br>CRCW1206 |   | R = Decimal<br>K = Thousand<br>M = Million<br>0000 = Jumper |   | F = ± 1 %<br>J = ± 5 %<br>Z = Jumper |   | H = ± 50 ppm/K<br>K = ± 100 ppm/K<br>N = ± 200 ppm/K<br>0 = Jumper |   | EN<br>EA<br>EB |   | EN 140401-802 E6<br>EN 140401-802 E0 |   |   |   |   |   |   |   |

Product Description: CRCW0805 100 562R 1 % ET1 EN802 E6

|                      |                                          |                                                                         |                |                   |               |                    |
|----------------------|------------------------------------------|-------------------------------------------------------------------------|----------------|-------------------|---------------|--------------------|
| CRCW0805             | 100                                      | 562R                                                                    | 1 %            | ET1               | EN802         | E6                 |
| MODEL/SIZE           | TCR                                      | RESISTANCE                                                              | TOLERANCE      | PACKAGING         | SPECIFICATION | FAILURE RATE LEVEL |
| CRCW0805<br>CRCW1206 | ± 50 ppm/K<br>± 100 ppm/K<br>± 200 ppm/K | 10R = 10 Ω<br>562R = 562 Ω<br>10K = 10 kΩ<br>1M = 10 MΩ<br>0R0 = Jumper | ± 1 %<br>± 5 % | E52<br>ET1<br>ET5 | EN 140401-802 | E6<br>E0           |

### EN 140401-802 ORDERING INFORMATION

Example of the ordering information for a resistor: CRCW0805 100 562R 1 % EN802 E6

**EN140401-802EZRR1608MS562RFE6**

The elements used in the component number have the following meaning:

**EN140401-802**

EN detail specification number

**EZ**

Assessment level for the zero-defect approach

**RR1608M**

Style

**S**

Temperature coefficient, according to EN 60062

$U = \pm 200 \text{ ppm/K}$ ;  $S = \pm 100 \text{ ppm/K}$ ;  $R = \pm 50 \text{ ppm/K}$

**562R**

Resistance value, according to EN 60062, 4 characters

**F**

Tolerance on rated resistance, according to EN 60062

$J = \pm 5 \%$ ;  $F = \pm 1 \%$

**E6**

Failure rate level according to EN 60115-1, table ZB.1

for "version A" the nominal failure rate level is E0

Please note that the EN 140401-802 ordering information is not specific to the nature of the termination plating.

#### Note

- The ordering information according to EN 140401-802: 2007 shown above succeeds and replaces the ordering information according to earlier versions of the detail specification EN 140401-802 or its predecessor CECC 40401-802, for example:

CECC 40401-802 EZ RC3715M B 562R F E6

CECC 40401-802 S RC3715 B 562R F E6

with

EZ; S

Assessment level, where EZ is successor to and superior replacement for S

RR3216M; RR3216


Style, with suffix M for "metric"

B

Temperature coefficient, according to the detail specification

$A = \pm 200 \text{ ppm/K}$ ;  $B = \pm 100 \text{ ppm/K}$ ;  $C = \pm 50 \text{ ppm/K}$

### DIMENSIONS

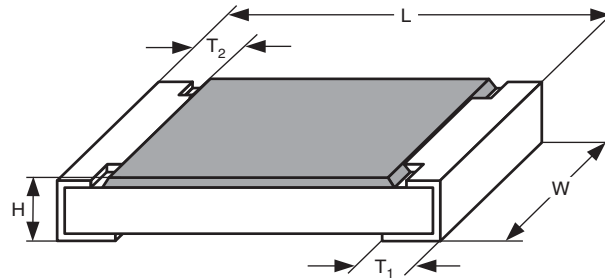


### DIMENSIONS AND MASS

| TYPE             | L<br>(mm)   | W<br>(mm)   | H<br>(mm)  | T <sub>1</sub> , T <sub>2</sub><br>(mm) | MASS<br>(mg) |
|------------------|-------------|-------------|------------|-----------------------------------------|--------------|
| CRCW0805 EN802.. | 2.00 ± 0.15 | 1.25 ± 0.15 | 0.5 ± 0.15 | 0.40 ± 0.20                             | ≤ 5.5        |
| CRCW1206 EN802.. | 3.20 ± 0.15 | 1.60 ± 0.15 | 0.5 ± 0.15 | 0.50 ± 0.25                             | ≤ 10         |

#### Note

- The resistors are marked using the four-character code system of IEC 60062, 4.2.3 on their black protective coating.

### PATTERN STYLES FOR CHIP RESISTORS

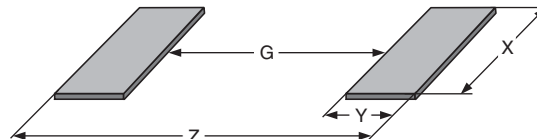

### RECOMMENDED SOLDER PAD DIMENSIONS

| TYPE             | WAVE SOLDERING |           |           |           | REFLOW SOLDERING |           |           |           |
|------------------|----------------|-----------|-----------|-----------|------------------|-----------|-----------|-----------|
|                  | G<br>(mm)      | Y<br>(mm) | X<br>(mm) | Z<br>(mm) | G<br>(mm)        | Y<br>(mm) | X<br>(mm) | Z<br>(mm) |
| CRCW0805 EN802.. | 0.65           | 1.40      | 1.50      | 3.45      | 0.65             | 1.10      | 1.40      | 2.85      |
| CRCW1206 EN802.. | 1.50           | 1.60      | 1.90      | 4.70      | 1.50             | 1.25      | 1.75      | 4.00      |

| PACKAGING            |                         |                     |                                          |       |       |                 |
|----------------------|-------------------------|---------------------|------------------------------------------|-------|-------|-----------------|
| MODEL                | CODE                    | QUANTITY            | CARRIER TAPE                             | WIDTH | PITCH | REEL DIAMETER   |
| CRCW0805 EN802<br>.. | EN = E52 <sup>(1)</sup> | 1000 <sup>(1)</sup> | Paper tape<br>acc. IEC 60286-3<br>Type I | 8 mm  | 4 mm  | 180 mm (7")     |
|                      | EA = ET1                | 5000                |                                          |       |       | 285 mm (11.25") |
|                      | EB = ET5                | 10 000              |                                          |       |       | 285 mm (11.25") |
| CRCW1206 EN802<br>.. | EN = E52 <sup>(1)</sup> | 1000 <sup>(1)</sup> |                                          |       |       | 180 mm (7")     |
|                      | EA = ET1                | 5000                |                                          |       |       | 285 mm (11.25") |
|                      | EB = ET5                | 10 000              |                                          |       |       | 285 mm (11.25") |

**Note**

<sup>(1)</sup> Package of 1000 pieces, code EN and E52, is available only for products with established reliability, CRCW.. EN802 E6

**DESCRIPTION**

Production follows a set of instructions established for reproducibility. A thick film layer and a glass-over are deposited on a high grade ceramic substrate (Al<sub>2</sub>O<sub>3</sub>) with its prepared inner contacts. The target value is achieved by laser cutting an L shaped groove in the resistive layer. The resistor elements are covered by a protective coating designed for electrical, mechanical and climatic protection. The terminations receive a final pure tin on nickel plating. A four-character code marking designates the resistance value in accordance with **IEC 60062** <sup>(4)</sup>.

The result of the determined production is verified by an extensive testing procedure performed on 100 % of the individual resistors. Only accepted products are placed into the paper tape according to **EN 60286-3** <sup>(4)</sup>, type I.

**ASSEMBLY**

The resistors are suitable for processing on automatic SMD assembly systems. They are suitable for automatic soldering using wave, reflow or vapour phase as shown in **IEC 61760-1** <sup>(4)</sup>. Solderability is specified for 2 years after production.

The resistors are lead (Pb)-free, the pure tin plating provides compatibility with both, lead (Pb)-free and tin lead (SnPb) based soldering processes. The immunity of the plating against tin whisker growth has been proven under extensive testing.

The encapsulation is resistant to all cleaning solvents commonly used in the electronics industry, including alcohols, esters and aqueous solutions. The suitability of conformal coatings, if applied, shall be qualified by appropriate means to ensure the long-term stability of the whole system.

**Notes**

<sup>(2)</sup> Global Automotive Declarable Substance List, see [www.gadsl.org](http://www.gadsl.org).

<sup>(3)</sup> CEFIC (European Chemical Industry Council), EECA (European Electronic Component Manufacturers Association), EICTA (European trade organisation representing the information and communications technology and consumer electronics), see [www.eicta.org](http://www.eicta.org) → issue → environmental policy → chemicals → chemicals for electronics.

<sup>(4)</sup> The quoted IEC standards are also released as EN standards with the same number and identical contents.

All products comply with the **GADSL** <sup>(2)</sup> and the **CEFIC-EECA-EICTA** <sup>(3)</sup> list of legal restrictions on hazardous substances. This includes full compliance with the following directives:

- 2000/53/EC End of Vehicle life Directive (ELV) and Annex II (ELV II)
- 2002/95/EC Restriction of the use of Hazardous Substances directive (RoHS)
- 2002/96/EC Waste Electrical and Electronic Equipment Directive (WEEE)

**APPROVALS**

The resistors are approved within the **IECQ-CECC** Quality Assessment System for Electronic Components to the detail specification **EN 140401-802** which refers to **EN 60115-1**, **EN 140400** and the variety of environmental test procedures of the **IEC 60068** <sup>(4)</sup> series.

Conformity is attested by the use of the **CECC** logo () as the Mark of Conformity on the package label.

**RELATED PRODUCTS**

A parallel family of lead (Pb)-bearing thick film chip resistors with CECC approval, available with established reliability, is available, see datasheet:


- "Lead (Pb)-Bearing Thick Film Chip Resistors with CECC Approval Available with Established Reliability", document no. 28808

A wider range of product sizes, TCR, tolerance and resistance values, plus the option of values from a different E series is available without approval to any EN specification (quality factor  $\pi_Q = 10$ ). See the datasheets:


- "Lead (Pb)-free Thick Film, Rectangular Chip Resistors", document no. 20035
- "Thick Film, Rectangular Chip Resistors", products with lead bearing solder contacts, document no. 20008




## FUNCTIONAL PERFORMANCE

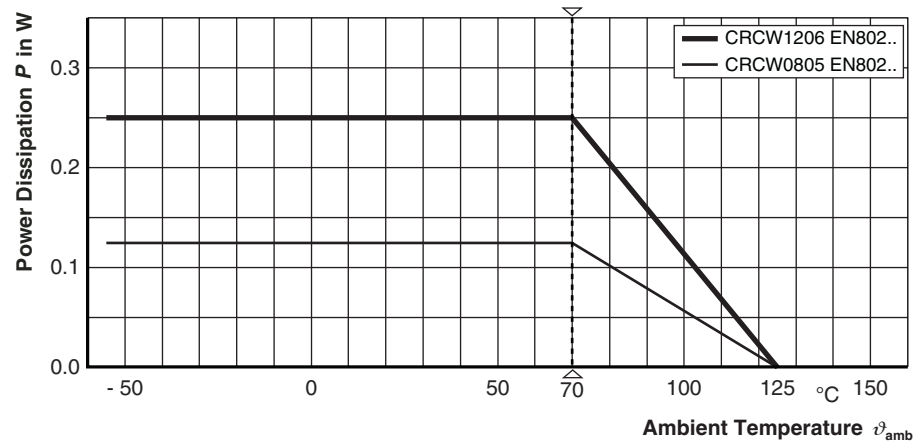

### Derating

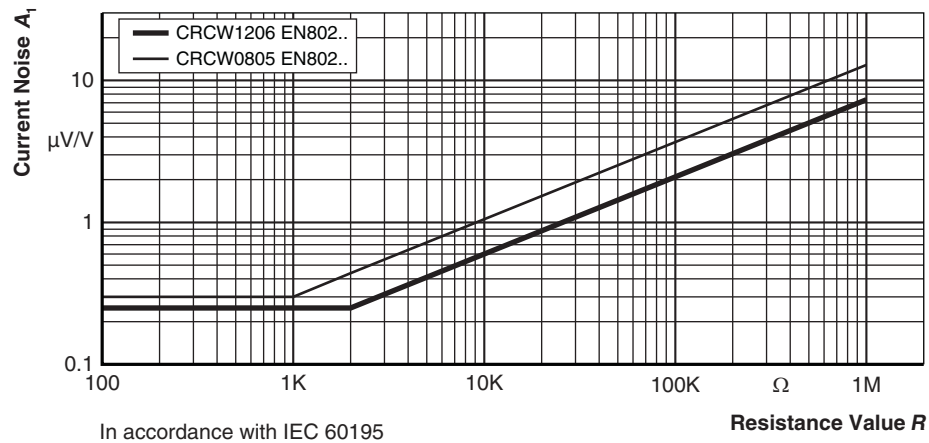

### Current Noise - $A_1$

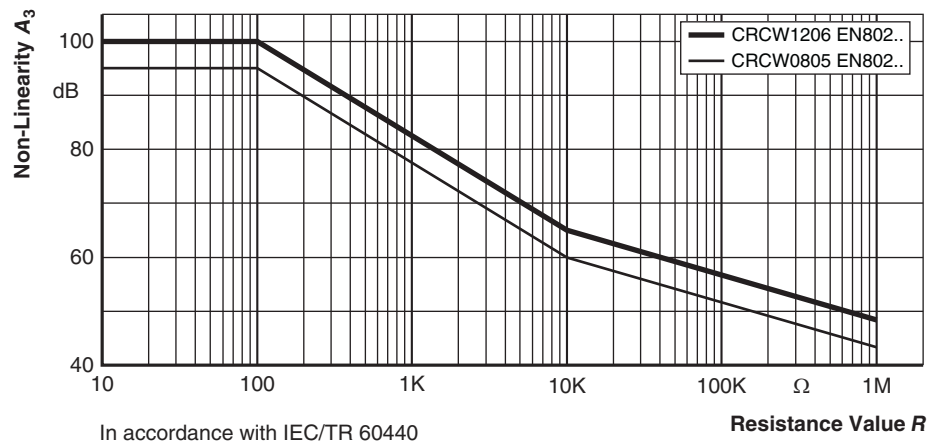

### Non-Linearity - $A_3$

## TESTS AND REQUIREMENTS

All tests are carried out in accordance with the following specifications:

EN 60115-1, generic specification

EN 140400, sectional specification

EN 140401-802, detail specification

The components are approved in accordance with the IECQ-CECC system. For the full test schedule refer to the documents listed above. The testing also covers most of the requirements specified by EIA/IS-703 and JIS-C-5202.

The tests are carried out in accordance with IEC 60068 and under standard atmospheric conditions in accordance with

IEC 60068-1, 5.3. Climatic category LCT/UCT/56 (rated temperature range: Lower category temperature, upper category temperature; damp heat, long term, 56 days) is valid.

Unless otherwise specified the following values apply:

Temperature: 15 °C to 35 °C

Relative humidity: 45 % to 75 %

Air pressure: 86 kPa to 106 kPa (860 mbar to 1060 mbar).

The components are mounted for testing on printed-circuit boards in accordance with EN 140400, 2.3.3, unless otherwise specified.

| TEST PROCEDURES AND REQUIREMENTS |                                  |                                   |                                                                                                                                |                                                                                        |                                                                    |
|----------------------------------|----------------------------------|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| EN<br>60115-1<br>CLAUSE          | IEC<br>60068-2<br>TEST<br>METHOD | TEST                              | PROCEDURE                                                                                                                      | REQUIREMENTS<br>PERMISSIBLE CHANGE ( $\Delta R$ )                                      |                                                                    |
|                                  |                                  |                                   |                                                                                                                                | STABILITY CLASS 1<br>OR BETTER                                                         | STABILITY CLASS 2<br>OR BETTER                                     |
|                                  |                                  |                                   | Stability for product types:                                                                                                   | 10 $\Omega$ to 1 M $\Omega$                                                            | 1.0 $\Omega$ to 1 M $\Omega$                                       |
|                                  |                                  |                                   | CRCW0805 EN802..<br>CRCW1206 EN802..                                                                                           |                                                                                        |                                                                    |
| 4.5                              | -                                | Resistance                        | -                                                                                                                              | $\pm 1 \%$                                                                             | $\pm 5 \%$                                                         |
| 4.7                              | -                                | Voltage<br>proof                  | $U = 1.4 \times U_{\text{ins}}$ ; 60 s                                                                                         | No flashover or breakdown                                                              |                                                                    |
| 4.13                             | -                                | Short time<br>overload            | $U = 2.5 \times \sqrt{P_{70} \times R}$<br>$\leq 2 \times U_{\text{max.}}$ ;<br>duration acc. to style<br>0805: 1 s; 1206: 2 s | $\pm (0.25 \% R + 0.05 \Omega)$                                                        | $\pm (0.5 \% R + 0.05 \Omega)$                                     |
| 4.17.2                           | 58 (Td)                          | Solderability                     | Solder bath method;<br>Sn60Pb40;<br>non-activated flux;<br>(235 $\pm$ 5) $^{\circ}\text{C}$ ;<br>(2 $\pm$ 0.2) s               | Good tinning ( $\geq 95 \%$ covered);<br>no visible damage                             |                                                                    |
|                                  |                                  |                                   | Solder bath method;<br>Sn96.5Ag3Cu0.5;<br>non-activated flux;<br>(245 $\pm$ 5) $^{\circ}\text{C}$ ;<br>(3 $\pm$ 0.3) s         | Good tinning ( $\geq 95 \%$ covered);<br>no visible damage                             |                                                                    |
| 4.8.4.2                          | -                                | Temperature<br>coefficient        | (20/- 55/20) $^{\circ}\text{C}$ and<br>(20/125/20) $^{\circ}\text{C}$                                                          | $\pm 50 \text{ ppm/K}$ ; $\pm 100 \text{ ppm/K}$                                       | $\pm 200 \text{ ppm/K}$                                            |
| 4.32                             | 21 (Uu3)                         | Shear<br>(adhesion)               | 45 N                                                                                                                           | No visible damage                                                                      |                                                                    |
| 4.33                             | 21 (Uu1)                         | Substrate<br>bending              | Depth 2 mm, 3 times                                                                                                            | No visible damage; no open circuit in bent position<br>$\pm (0.25 \% R + 0.05 \Omega)$ | $\pm (0.5 \% R + 0.05 \Omega)$                                     |
| 4.19                             | 14 (Na)                          | Rapid<br>change of<br>temperature | 30 min at - 55 $^{\circ}\text{C}$<br>30 min at 125 $^{\circ}\text{C}$                                                          | $\pm (0.25 \% R + 0.05 \Omega)$<br><br>$\pm (1 \% R + 0.05 \Omega)$                    | $\pm (0.5 \% R + 0.05 \Omega)$<br><br>$\pm (1 \% R + 0.05 \Omega)$ |
|                                  |                                  |                                   | 5 cycles                                                                                                                       |                                                                                        |                                                                    |
|                                  |                                  |                                   | 1000 cycles                                                                                                                    |                                                                                        |                                                                    |

| TEST PROCEDURES AND REQUIREMENTS |                                                                           |                                                               |                                                                                                                                                                                                         |                                                                  |                                                                |
|----------------------------------|---------------------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------------------------------------------------|
| EN<br>60115-1<br>CLAUSE          | IEC<br>60068-2<br>TEST<br>METHOD                                          | TEST                                                          | PROCEDURE                                                                                                                                                                                               | REQUIREMENTS<br>PERMISSIBLE CHANGE ( $\Delta R$ )                |                                                                |
|                                  |                                                                           |                                                               |                                                                                                                                                                                                         | STABILITY CLASS 1<br>OR BETTER                                   | STABILITY CLASS 2<br>OR BETTER                                 |
|                                  |                                                                           |                                                               | Stability for product types:                                                                                                                                                                            | 10 $\Omega$ to 1 M $\Omega$                                      | 1.0 $\Omega$ to 1 M $\Omega$                                   |
|                                  |                                                                           |                                                               | CRCW0805 EN802..<br>CRCW1206 EN802..                                                                                                                                                                    |                                                                  |                                                                |
| 4.23                             | 2 (Ba)<br><br>30 (Db)<br><br>1 (Aa)<br><br>13 (M)<br><br>30 (Db)<br><br>- | Climatic sequence:                                            | 125 °C; 16 h<br><br>55 °C; $\geq 90$ % RH;<br>24 h; 1 cycle<br><br>- 55 °C; 2 h<br><br>1 kPa; (25 $\pm$ 10) °C; 1 h<br><br>55 °C; $\geq 90$ % RH;<br>24 h; 5 cycles<br><br>$U = \sqrt{P_{70} \times R}$ | $\pm (1 \% R + 0.05 \Omega)$                                     | $\pm (2 \% R + 0.1 \Omega)$                                    |
| 4.23.2                           |                                                                           | Dry heat                                                      |                                                                                                                                                                                                         |                                                                  |                                                                |
| 4.23.3                           |                                                                           | Damp heat, cyclic                                             |                                                                                                                                                                                                         |                                                                  |                                                                |
| 4.23.4                           |                                                                           | Cold                                                          |                                                                                                                                                                                                         |                                                                  |                                                                |
| 4.23.5                           |                                                                           | Low air pressure                                              |                                                                                                                                                                                                         |                                                                  |                                                                |
| 4.23.6                           |                                                                           | Damp heat, cyclic                                             |                                                                                                                                                                                                         |                                                                  |                                                                |
| 4.23.7                           |                                                                           | DC load                                                       |                                                                                                                                                                                                         |                                                                  |                                                                |
| 4.25.1                           | -                                                                         | Endurance at 70 °C                                            | $U = \sqrt{P_{70} \times R} \leq U_{\max.}$ ;<br>1.5 h on; 0.5 h off;<br><br>70 °C; 1000 h<br><br>70 °C; 8000 h                                                                                         | $\pm (1 \% R + 0.05 \Omega)$<br><br>$\pm (2 \% R + 0.05 \Omega)$ | $\pm (2 \% R + 0.1 \Omega)$<br><br>$\pm (4 \% R + 0.1 \Omega)$ |
| 4.18.2                           | 58 (Td)                                                                   | Resistance to soldering heat                                  | Solder bath method;<br>(260 $\pm$ 5) °C;<br>(10 $\pm$ 1) s                                                                                                                                              | $\pm (0.25 \% R + 0.05 \Omega)$                                  | $\pm (0.5 \% R + 0.05 \Omega)$                                 |
| 4.35                             | -                                                                         | Flammability, needle flame test                               | IEC 60695-11-5 <sup>(3)</sup> ,<br>10 s                                                                                                                                                                 | No burning after 30 s                                            |                                                                |
| 4.24                             | 78 (Cab)                                                                  | Damp heat, steady state                                       | (40 $\pm$ 2) °C<br>(93 $\pm$ 3) % RH ; 56 days;                                                                                                                                                         | $\pm (1 \% R + 0.05 \Omega)$                                     | $\pm (2 \% R + 0.1 \Omega)$                                    |
| 4.25.3                           | -                                                                         | Endurance at upper category temperature                       | 125 °C; 1000 h                                                                                                                                                                                          | $\pm (1 \% R + 0.05 \Omega)$                                     | $\pm (2 \% R + 0.1 \Omega)$                                    |
| 4.40                             | -                                                                         | Electrostatic discharge (human body model)                    | IEC 61340-3-1 <sup>(3)</sup><br>3 pos. + 3 neg. discharges;<br>Voltage acc. to style<br>0805: 800 V; 1206: 1000 V                                                                                       | $\pm (1 \% \Delta R + 0.05 \Omega)$                              |                                                                |
| 4.29                             | 45 (XA)                                                                   | Component solvent resistance                                  | Isopropyl alcohol;<br>50 °C; method 2                                                                                                                                                                   | No visible damage                                                |                                                                |
| 4.30                             | 45 (XA)                                                                   | Solvent resistance of marking                                 | Isopropyl alcohol;<br>50 °C; method 1, toothbrush                                                                                                                                                       | Marking legible,<br>no visible damage                            |                                                                |
| 4.22                             | 6 (Fc)                                                                    | Vibration, endurance by sweeping                              | $f = 10$ Hz to 2000 Hz;<br>$x, y, z \leq 1.5$ mm;<br>$A \leq 200$ m/s <sup>2</sup> ;<br>10 sweeps per axis                                                                                              | $\pm (0.25 \% R + 0.05 \Omega)$                                  | $\pm (0.5 \% R + 0.05 \Omega)$                                 |
| 4.37                             | -                                                                         | Periodic electric overload                                    | $U = \sqrt{15 \times P_{70} \times R} \leq 2 \times U_{\max.}$ ;<br>0.1 s on; 2.5 s off;<br>1000 cycles                                                                                                 | $\pm (1 \% R + 0.05 \Omega)$                                     |                                                                |
| 4.27                             | -                                                                         | Single pulse high voltage overload;<br>10 $\mu$ s/700 $\mu$ s | $U = 10 \times \sqrt{P_{70} \times R} \leq 2 \times U_{\max.}$ ;<br>10 pulses                                                                                                                           | $\pm (1 \% R + 0.05 \Omega)$                                     |                                                                |



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**