


This exploded view diagram illustrates the assembly of a mechanical component, likely a pump or motor housing. The diagram includes the following parts and assembly points:

- Top Section:** Features a circular flange (38) and a mounting bracket (44) secured by a screw (45) and a pin (63). A small rectangular component (50) is attached to the bracket via a screw (51) and a pin (52).
- Central Section:** Shows a main housing (46) with a mounting plate (66) secured by a screw (67). A small rectangular component (20) is attached to the housing via a screw (21).
- Left Section:** Includes a long rectangular plate (33) secured by a screw (24). Below it, a smaller plate (30) is secured by a screw (29). A spring (29) is shown between the plates. A larger plate (29) is secured by a screw (32).
- Bottom Section:** Features a base plate (25) secured by a screw (26) and a pin (61). A small rectangular component (23) is attached to the base plate via a screw (27).
- Right Section:** Includes a small rectangular component (34) secured by a screw (8). A larger rectangular component (9) is secured by a screw (12) and a pin (17).
- Assembly Labels:**
 - A:** Points to the top flange (38).
 - B:** Points to the mounting bracket (44).
 - C:** Points to the base plate (25).

	-	1	1	1	1	1	1	1528113	PRINT, APPLICATOR LOG SHEET	73
	-	1	1	1	1	1	1	1338705-3	DOCUMENTATION PACKAGE	72
										71
										70
										69
										68
	-	1	1	1	1	1	1	461264-5	PLATE, IDENTIFICATION	67
	-	2	2	2	2	2	2	21017-2	SCR,DRIVE (#2x.19) ID PLATE	66
										65
										64
	-	1	1	1	1	1	1	3-18031-0	SCR,SKT SET (M6X6)RAM	63
										62
	-	2	2	2	2	2	2	1-18024-5	SCR,BHC (M5X25) DRAG	61
	-	1	1	1	1	1	1	18024-7	SCR,BHC (M4X10) ANVIL	60
	-	1	1	1	1	1	1	5-18022-2	SCR,HEX (M4X8) FEED FINGER	59
										58
										57
	-	1	1	1	1	1	1	1338685-1	PAWL, FEED	56
										55
	-	4	4	4	4	4	4	18024-8	SCR,BHC (M4x12) SHEAR HOLDER	54
										53
	-	1	1	1	1	1	1	18030-1	NUT, HEX (M3) HOLD DOWN	52
	-	1	1	1	1	1	1	811242-5	BUMPER, HOLDDOWN	51
	-	1	1	1	1	1	1	690753-2	SPACER, TONKER	50
	-	1	1	1	1	1	1	18024-3	SCR,BHC (M3X10) CAM	49
	-	-	1	-	-	1	-	1338675-1	CAM, PRE FEED 30 & 40 mm ST	48
	-	1	-	1	1	-	1	1338676-1	CAM, POST FEED 30 & 40 mm ST	47
	-	1	1	1	1	1	1	1320999-3	APPLICATOR BASIC SUBASSY	46
	-	1	1	1	1	1	1	690191-1	PLUG, NYLON	45
	-	1	1	1	1	1	1	1338660-3	RAM	44
										43
										42
	-	1	1	1	1	1	1	2-18024-6	SCR,BHC (M8X25) RAM	41
										40
										39
	-	1	1	1	1	1	1	469367-8	SPACER, FINE ADJUST	38
	-	1	1	1	1	1	1	879103-3	FINE ADJUST HEAD SUBASSY	37
										36
										35
	-	1	1	1	1	1	1	1320934-1	SUPPORT, TERMINAL	34
	-	2	2	2	2	2	2	1-18024-0	SCR,BHC (M4X20) STRIP GUIDE	33
	-	1	1	1	1	1	1	18027-2	WASHER, FLAT (M4)	32
	-	3	3	3	3	3	3	1-18023-2	SCR, SKT CAP (M4X12) MOUNT BLOCK	31
	-	1	1	1	1	1	1	1320908-8	SPACER, STRIP GUIDE	30
	-	1	1	1	1	1	1	1633073-1	STRIP GUIDE PLATE ASSY	29
										28
	-	2	2	2	2	2	2	1-22284-0	SPRING, DRAG	27
	-	1	1	1	1	1	1	356835-1	LEVER, DRAG RELEASE	26
	-	1	1	1	1	1	1	240792-1	DRAG, TERMINAL	25
	-	1	1	1	1	1	1	1320928-1	PLATE, STRIP GUIDE	24
	-	1	1	1	1	1	1	980371-4	SCR,SHC SHLD	23
	-	1	-	1	1	-	1	690472-2	STRIPPER	22
	-	1	1	1	1	1	1	1-18023-1	SCR,SHC (M4X10) STRIPPER	21
	-	4	4	4	4	4	4	18025-2	WASHER,LOCK (M4)STRIPPER	20
	-	-	1	-	-	1	-	690472-1	STRIPPER	19
										18
	-	1	-	-	1	-	-	1338684-1	HOLDER, SHEAR, FRONT (NO-CUT)	17
										16
										15
										14
										13
	-	1	1	1	1	1	1	5-22280-0	SPRING, SHEAR	12
	-	1	1	1	1	1	1	356885-4	STOP, SHEAR	11
	-	-	1	1	-	1	1	1320921-1	HOLDER, SHEAR, FRONT (CUT)	10
	-	1	1	1	1	1	1	462006-1	SHEAR, FLOAT (FRONT)	9
	1	2	2	2	1	1	1	4-1333204-9	ANVIL	8
										7
										6
	-	1	1	1	1	1	1	2-455889-0	DEPRESSOR, SHEAR (FRONT)	5
	-	1	1	1	1	1	1	1-238011-6	SPACER, BLOCK CRIMPER	4
	1	2	2	2	1	1	1	2-683453-9	CRIMPER, INSULATION	3
	-	1	1	1	1	1	1	455888-4	SPACER, CRIMPER	2
	1	2	2	2	1	1	1	3-456405-8	CRIMPER, WIRE	1
-77	-76	-72	-71	-6	-2	-1		PART NO	DESCRIPTION	ITEM NO
								REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION)		

* WARNING:
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE
SETTING. USE OF SETTINGS BELOW MIN REQ'D CRIMP
HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

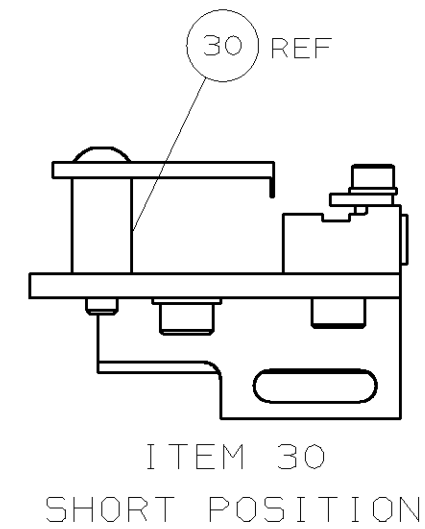

		B	ECN 0150-1342-03
		A	SEE ECN 015A-0409-0
P	F	LTR	REVISION RECORD

			DIMENSIONS: mm {INCHES}	MATL	-	HT TR	-	FIN	-
			DO NOT SCALE PRINT.		-		-		-
			TOLERANCES UNLESS OTHERWISE SPECIFIED:	DR	01MAY02	APP	01MAY02		
			1 PLC DEC ±	M.CLIFFORD			F.BACHHURST		
			2 PLC DEC ±	CHK	-	REL	11JUN02		
			3 PLC DEC ±				M.CLIFFORD		
			ANGLES ±						
			SURF TEXTURE, ✓	NAME	FINE	ADJ	SIDE	FD	HD-I
			REMOVE BURRS, BREAK	SCALE	-				
			SHARP EDGES 0.38 MAX		D	Dwg No	1528113		
2	MC	JUN02						SHEET	REV
		DATE						1 of 1	8

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1528113-6](#)