


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

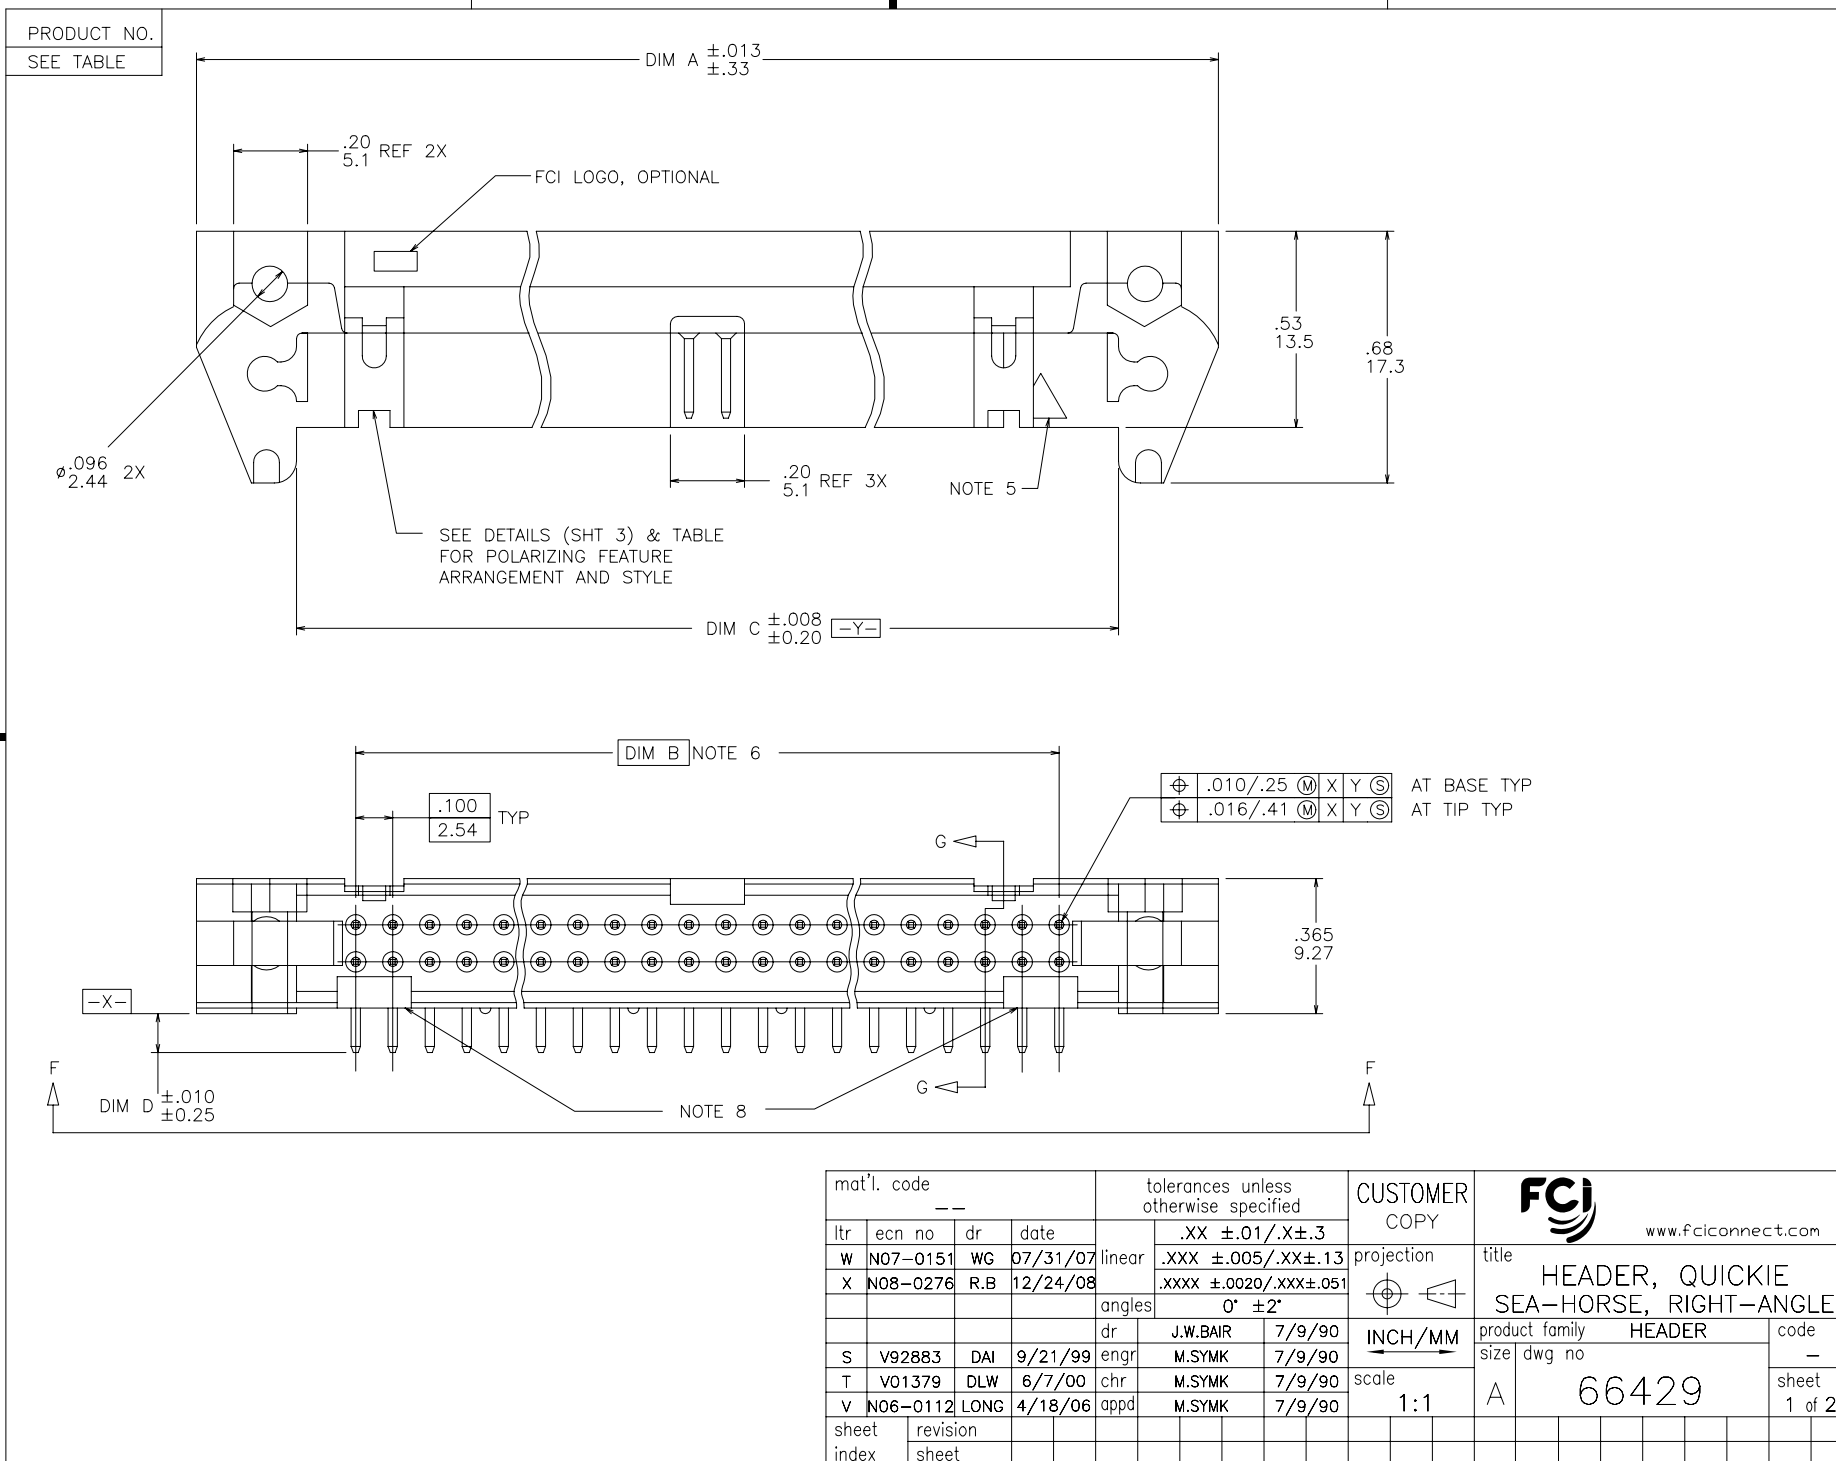

1 2

ACAD


PDM: Rev:X

STATUS Released 26 Printed: Apr 12, 2011



B



PRODUCT NO.
SEE TABLE

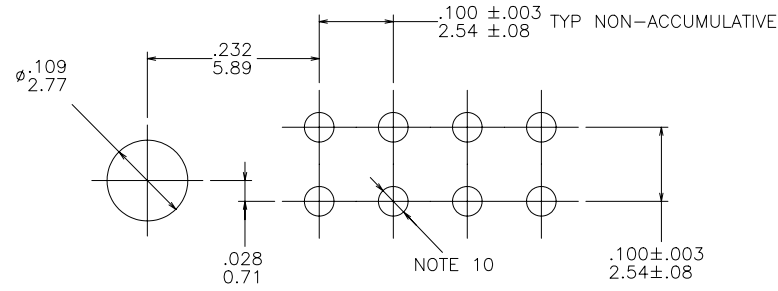

RECOMMENDED HOLE PATTERN
SCALE 10:1

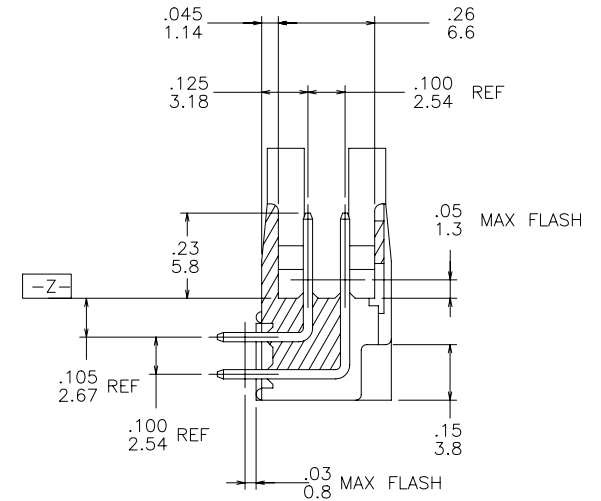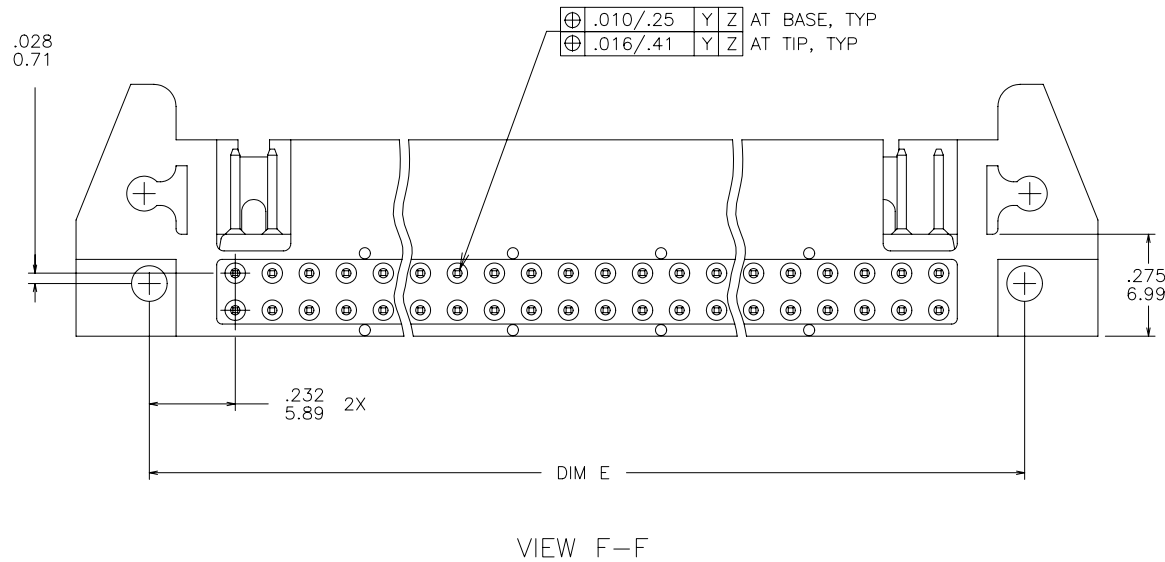

SECTION G-G
ROTATED 90° CW

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3			
X				linear	.XXX ±.005/.XX±.13	projection		
				linear	.XXX ±.0020/.XXX±.051	INCH/MM		
				angles	0° ±2°	scale	A	
				dr	J.W.BAIR 7/9/90	1:1		
				enr	M.SYMK 7/9/90		product family HEADER size dwg no 66429	
				chr	M.SYMK 7/9/90			
				appd	M.SYMK 7/9/90		code sheet 2 of	
sheet index	revision sheet							


cage code

PDM: Rev:X

STATUS Released 26 Printed: Apr 12, 2011

PRODUCT NUMBER
SEE TABLE


LP LATCH 66177-001
STD LATCH 65824-001
NOTE 9

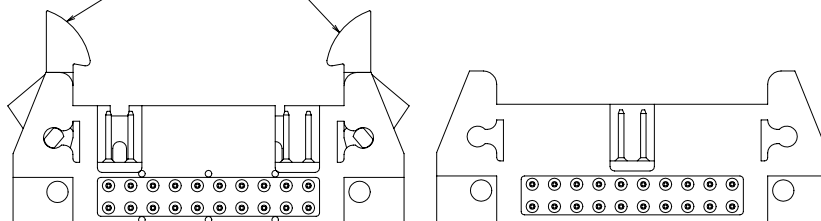


HEADER WITH LATCHES

NOTE 12
2x8 THRU 2x30
(2x10 SHOWN)
STYLE E

BOTTOM VIEW




2x5
STYLE A

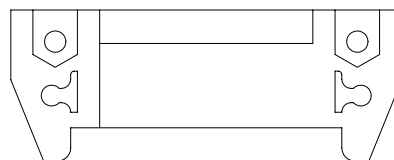


2x8 THRU 2x30
(2x10 SHOWN)
STYLE E


TOP VIEW



2x5
STYLE B



2x7
STYLE C

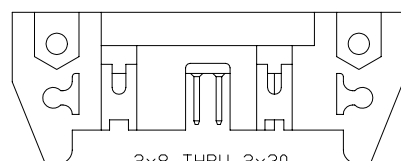


2x8 THRU 2x30
(2x10 SHOWN)
STYLE D

NOTES:

1. RECOMMENDED MOUNTING SCREW SIZE: #2-56 FILLISTER HD MACH SCREW, 3/8" LG. FOR 1/16" & 3/32" BOARD, 7/16 LG FOR 1/8" BOARD.
2. MOLDING MAT'L: 30% GLASS FILLED POLYESTER, FLAME RETARDANT PER UL-94V-0, COLOR: BLUE.
3. PIN MATERIAL: 3/4 HARD PHOS.-BRONZE ALLOY UNS C-51000.
4. 1° MAX DRAFT PERMISSIBLE ON ALL SURFACES UNLESS OTHERWISE SPECIFIED.
- ⑤ PIN #1 IDENTIFIER, OPTIONAL.
- ⑥ **-B-** BASIC DIM SHALL BE LOCATED SYMMETRICAL TO DATUM -Y-.
7. PLATING ON LEAD-IN PORTION OF PIN IS MANUFACTURING OPTION.
- ⑧ THESE SLOTS DO NOT EXIST ON 2x5 AND 2x7 SIZES.
- ⑨ THE LATCHES THAT ARE INSTALLED IN SOME HEADERS MUST WITHSTAND A PUSHOUT FORCE OF 2.0 LBS/.9 KGS MIN WHILE IN THE INSTALLATION POSITION.
- ⑩ .040±.003/.102±.08 DIA HOLE TYP FOR SQ PINS, .035±.003/.89±.08 DIA HOLE TYP FOR ROUND PINS.
11. RETENTION FEATURE AVAILABLE ON ROUND PIN P/N'S ONLY. RETENTION INCLUDES THE LETTER 'R' AFTER THE EXISTING P/N. FOR TUBE PKG, P/N INCLUDES THE LETTER 'T' AFTER THE EXISTING P/N.
 EXAMPLE: 66429-XXX FOR EXISTING P/N
 66429-XXXR FOR RETENTION P/N
 66429-XXXT FOR TUBE PKG. P/N
 66429-XXXRT FOR RETENTION & TUBE PKG. P/N
 15 LBS/6.8 KGS MAX INSERTION AND .25 LBS/.1 KGS MIN RETENTION FORCE WHEN USED IN .89±.08/.035±.003 DIA HOLES AND 1.57/.062 THICK PC BOARD. RETENTION FEATURE LOCATION IS MANUFACTURERS OPTION.
- ⑫ STYLE "E" DOES NOT HAVE ANY POLARIZING SLOTS. THE KEY SLOT IS LOCATED IN THE BOTTOM SIDE.
- ⑬ PIN #1 REMOVED ON DASH# -609.
- ⑭ MOLDING MAT'L: 30% GLASS FILLED POLYESTER, FLAME RETARDANT PER UL-94V-0. COLOR: BLACK.
- ⑮ MOLDING MAT'L: PCT, FLAME RETARDANT PER UL-94V-0. COLOR: BLACK.
- 16 ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- 17 IF "LF" P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- 18 THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
19. PLATING OPTION: MAYBE EITHER GOLD OT GXT PLATING AT MANUFACTURER'S OPTION .

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI		www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3	projection		title	product family	code	sheet
X					.XXX ±.005/.XX±.13						
					.XXX ±.0020/.XXX±.051						
				angles	0° ±2°	INCH/MM	scale	A	size	dwg no	3 of
				dr	J.W.BAIR 7/9/90						
				enr	M.SYMK 7/9/90						
				chr	M.SYMK 7/9/90	5/1 1:1	A	66429	66429	66429	3 of
				appd	M.SYMK 7/9/90						
sheet index	revision sheet										



1		2								3		4																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19			HSG MATERIAL																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
66429-001	2x5	NO	ROUND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni			PBT BLUE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
-002			SQ				.105/2.67		150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-003			ROUND				.150/3.81		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-004			SQ				.150/3.81		150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-005			SQ				.675/17.15		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-006	2x5		SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.8	150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-007	2x7		ROUND	1.460/37.08	.600/15.24	.920/23.37	.105/2.67	1.06/26.9	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-008			SQ				.105/2.67		150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-009			ROUND				.150/3.81		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-010			SQ				.150/3.81		150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-011			SQ				.675/17.15		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-012	2x7		SQ	1.460/37.08	.600/15.24	.920/23.37	.675/17.15	1.06/26.9	150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-013	2x8		ROUND	1.560/39.62	.700/17.78	1.020/25.91	.105/2.67	1.16/29.5	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-014			SQ				.105/2.67		150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-015			ROUND				.150/3.81		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-016			SQ				.150/3.81		150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-017			SQ				.675/17.15		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-018	2x8		SQ	1.560/39.62	.700/17.78	1.020/25.91	.675/17.15	1.16/29.5	150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-019	2x10		ROUND	1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.5	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-020			SQ				.105/2.67		150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-021			ROUND				.150/3.81		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-022			SQ				.150/3.81		150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-023			SQ				.675/17.15		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-024	2x10		SQ	1.760/44.70	.900/22.86	1.220/30.99	.675/17.15	1.36/34.5	150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-025	2x13		ROUND	2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.2	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-026			SQ				.105/2.67		150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-027			ROUND				.150/3.81		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-028			SQ				.150/3.81		150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-029			SQ				.675/17.15		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-030	2x13		SQ	2.060/52.32	1.200/30.48	1.520/38.61	.675/17.15	1.66/42.2	150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-031	2x17		ROUND	2.460/62.48	1.600/40.64	1.920/48.77	.105/2.67	2.06/52.3	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-032			SQ				.105/2.67		150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-033			ROUND				.150/3.81		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-034			SQ				.150/3.81		150μ"/3.81μm Sn																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
-035			SQ				.675/17.15		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
66429-036	2x17	NO	SQ	2.460/62.48	1.600/40.64	1.920/48.77	.675/17.15	2.06/52.3	150μ"/3.81μm Sn			PBT BLUE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
mat'l. code							tolerances unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
							ltr	ecn no	dr	date																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
							X				linear	.XX ±.01		projection 	title HEADER, QUICKIE SEA-HORSE, RIGHT ANGLE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
												.XXX ±.005																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
												.XXXX ±.0020																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
											angles	0° ±2°			product family HEADERS size dwg no		code - sheet 4 of																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
											dr	J.W.BAIR	7/9/90																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
				enr	M.SMYK	7/9/90																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
				chr	M.SMYK	7/9/90																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
				appd	M.SMYK	7/9/90	scale 1:1	A	66429																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
sheet index		revision sheet																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											</



PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	HSG MATERIAL
66429-037	2x20	NO	RND	2.760/70.10	1.900/48.26	2.220/56.39	.105/2.67	2.36/59.94	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	PBT BLUE
↑ -038	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150μ"/3.81μm Sn	↑
-039	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-040	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150μ"/3.81μm Sn	↑
↓ -041	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-042	2x20	↑	SQ	2.760/70.10	1.900/48.26	2.220/56.39	.675/17.15	2.36/59.94	150μ"/3.81μm Sn	↑
-043	2x25	↑	RND	3.260/82.80	2.400/60.96	2.720/69.09	.105/2.67	2.86/72.64	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-044	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150μ"/3.81μm Sn	↑
-045	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-046	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150μ"/3.81μm Sn	↑
↓ -047	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-048	2x25	NO	SQ	3.260/82.80	2.400/60.96	2.720/69.09	.675/17.15	2.86/72.64	150μ"/3.81μm Sn	↑
-049	2x5	STD	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.84	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-050	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150μ"/3.81μm Sn	↑
-051	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-052	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150μ"/3.81μm Sn	↑
↓ -053	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-054	2x5	↑	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84	150μ"/3.81μm Sn	↑
-055	2x7	↑	RND	1.460/37.08	.600/15.24	.920/23.37	.105/2.67	1.06/26.92	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-056	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150μ"/3.81μm Sn	↑
-057	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-058	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150μ"/3.81μm Sn	↑
↓ -059	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-060	2x7	↑	SQ	1.460/37.08	.600/15.24	.920/23.37	.675/17.15	1.06/26.92	150μ"/3.81μm Sn	↑
-061	2x8	↑	RND	1.560/39.62	.700/17.78	1.020/25.91	.105/2.67	1.16/29.46	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-062	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150μ"/3.81μm Sn	↑
-063	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-064	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150μ"/3.81μm Sn	↑
↓ -065	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-066	2x8	↑	SQ	1.560/39.62	.700/17.78	1.020/25.91	.675/17.15	1.16/29.46	150μ"/3.81μm Sn	↑
-067	2x10	↑	RND	1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.54	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-068	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150μ"/3.81μm Sn	↑
-069	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-070	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150μ"/3.81μm Sn	↑
↓ -071	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
66429-072	2x10	STD	SQ	1.760/44.70	.900/22.86	1.220/30.99	.675/17.15	1.36/34.54	150μ"/3.81μm Sn	PBT BLUE

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	www.fciconnect.com
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3		
X					.XXX ±.005/.XX±.13		title HEADER, QUICKIE SEA-HORSE, RIGHT-ANGLE
					.xxx ±.0020/.xxx±.051		
				angles	0° ±2°		product family HEADER
				dr	J.W.BAIR 7/9/90		
				enr	M.SYMK 7/9/90	INCH/MM	code —
				chr	M.SYMK 7/9/90		
				appd	M.SYMK 7/9/90	scale 1:1	size dwg no 66429
sheet index	revision sheet						cage code 66429
							sheet 5 of



A

B

PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	HSG MATERIAL
66429-073	2x13	STD	RND	2.060/52,32	1.200/30,480	1.520/38,61	.105/ 2,67	1.66/42,16	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	PBT BLUE
↑ -074	↑	↑	SQ	↑	↑	↑	.105/ 2,67	↑	150μ"/3.81μm Sn	↑
-075	↑	↑	RND	↑	↑	↑	.150/ 3,81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-076	↑	↑	SQ	↑	↑	↑	.150/ 3,81	↑	150μ"/3.81μm Sn	↑
↓ -077	↓	↓	SQ	↓	↓	↓	.675/17,15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-078	2x13	↑	SQ	2.060/52,32	1.200/30,480	1.520/38,61	.675/17,15	1.66/42,16	150μ"/3.81μm Sn	↑
-079	2x17	↑	RND	2.460/62,48	1.600/40,640	1.920/48,77	.105/ 2,67	2.06/52,32	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-080	↑	↑	SQ	↑	↑	↑	.105/ 2,67	↑	150μ"/3.81μm Sn	↑
-081	↑	↑	RND	↑	↑	↑	.150/ 3,81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-082	↑	↑	SQ	↑	↑	↑	.150/ 3,81	↑	150μ"/3.81μm Sn	↑
↓ -083	↓	↓	SQ	↓	↓	↓	.675/17,15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-084	2x17	↑	SQ	2.460/62,48	1.600/40,640	1.920/48,77	.675/17,15	2.06/52,32	150μ"/3.81μm Sn	↑
-085	2x20	↑	RND	2.760/ 70,1	1.900/48,260	2.220/56,39	.105/ 2,67	2.36/59,94	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-086	↑	↑	SQ	↑	↑	↑	.105/ 2,67	↑	150μ"/3.81μm Sn	↑
-087	↑	↑	RND	↑	↑	↑	.150/ 3,81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-088	↑	↑	SQ	↑	↑	↑	.150/ 3,81	↑	150μ"/3.81μm Sn	↑
↓ -089	↓	↓	SQ	↓	↓	↓	.675/17,15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-090	2x20	↑	SQ	2.760/ 70,1	1.900/48,260	2.220/56,39	.675/17,15	2.36/59,94	150μ"/3.81μm Sn	↑
-091	2x25	↑	RND	3.260/ 82,8	2.400/60,960	2.720/69,09	.105/ 2,67	2.86/72,64	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-092	↑	↑	SQ	↑	↑	↑	.105/ 2,67	↑	150μ"/3.81μm Sn	↑
-093	↑	↑	RND	↑	↑	↑	.150/ 3,81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-094	↑	↑	SQ	↑	↑	↑	.150/ 3,81	↑	150μ"/3.81μm Sn	↑
↓ -095	↓	↓	SQ	↓	↓	↓	.675/17,15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
-096	2x25	STD	SQ	3.260/ 82,8	2.400/60,960	2.720/69,09	.675/17,15	2.86/72,64	150μ"/3.81μm Sn	↑
-097	2x30	NO	RND	3.760/ 95,5	2.900/73,660	3.220/81,79	.105/ 2,67	3.36/85,34	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-098	↑	↑	SQ	↑	↑	↑	.105/ 2,67	↑	150μ"/3.81μm Sn	↑
-099	↑	↑	RND	↑	↑	↑	.150/ 3,81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-100	↑	↑	SQ	↑	↑	↑	.150/ 3,81	↑	150μ"/3.81μm Sn	↑
-101	↑	↓	SQ	↑	↑	↑	.675/17,15	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-102	↑	NO	SQ	↑	↑	↑	.675/17,15	↑	150μ"/3.81μm Sn	↑
-103	↑	STD	RND	↑	↑	↑	.105/ 2,67	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-104	↑	↑	SQ	↑	↑	↑	.105/ 2,67	↑	150μ"/3.81μm Sn	↑
-105	↑	↑	RND	↑	↑	↑	.150/ 3,81	↑	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↑
-106	↑	↑	SQ	↑	↑	↑	.150/ 3,81	↑	150μ"/3.81μm Sn	↑
↓ -107	↓	↓	SQ	↓	↓	↓	.675/17,15	↓	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	↓
66429-108	2x30	STD	SQ	3.760/ 95,5	2.900/73,660	3.220/81,79	.675/17,15	3.36/85,34	150μ"/3.81μm Sn	PBT BLUE

A

B

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	www.fciconnect.com
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3		
X				linear	.XXX ±.005/.XX±.13	projection	
				angles	.XXX ±.0020/.XXX±.051	INCH/MM	
				dr	J.W.BAIR 7/9/90	scale	1:1
				enr	M.SYMK 7/9/90		
				chr	M.SYMK 7/9/90		
				appd	M.SYMK 7/9/90		
sheet index	revision sheet						

title		product family		code
HEADER, QUICKIE		HEADER		-
SEA-HORSE, RIGHT-ANGLE		size dwg no		sheet
		66429		6 of

PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19		STYLE	HSG. MATERIAL	
66429-109	2x5	NO	SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/ 2. 67	. 86/21. 84	30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni			PBT BLUE	
	-110	2x7	↑	↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 92		C		
	-111	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D		
	-112	2x10			1. 760/ 44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 54		↑		
	-113	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16				
	-114	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32				
	-115	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94				
	-116	2x25	↓		3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 64		↓		
	-117	2x30	NO		3. 760/95. 50	2. 900/73. 66	3. 220/81. 79		3. 36/85. 34		D		
	-118	2x5	STD		1. 260/32. 00	. 400/10. 16	. 720/18. 29		. 86/21. 84		A		
	-119	2x7	↑		1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 92		C		
	-120	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D		
	-121	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 54		↑		
	-122	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16				
	-123	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32				
	-124	2x20			2. 760/ 70. 1	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94				
	-125	2x25	↓	↓	3. 260/ 82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 64	↓	↓		
	-126	2x30	STD	SQ	3. 760/ 95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 34	30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni	D		
	-127	2x5	NO	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3. 81	. 86/21. 84	30μ"/0. 76μm GXT WITH Au FLASH	A		
	-128	2x7	↑	↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 92		C		
	-129	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D		
	-130	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 54		↑		
	-131	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16				
	-132	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32				
	-133	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94		↓		
	-134	2x25	↓		3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 64		↓		
	-135	2x30	NO		3. 760/95. 50	2. 900/73. 66	3. 220/81. 79		3. 36/85. 34		D		
	-136	2x5	STD		1. 260/32. 00	. 400/10. 16	. 720/18. 29		. 86/21. 84		A		
	-137	2x7	↑		1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 92		C		
	-138	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D		
	-139	2x10			1. 760/ 44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 54		↑		
	-140	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16				
	-141	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32				
	-142	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94				
	-143	2x25	↓	↓	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 64		↓		
66429-144	2x30	STD	RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 150/ 3. 81	3. 36/85. 34	30μ"/0. 76μm GXT WITH Au FLASH		D	PBT BLUE	

mat'l. code --				tolerances unless otherwise specified			CUSTOMER COPY		 www.fciconnect.com			
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3			projection 	title HEADER, QUICKIE SEA-HORSE, RIGHT-ANGLE			
x					.XXX ±.005/.XX±.13							
					.XXX ±.0020/.XXX±.051							
				angles	0° ±2°			 INCH/MM	product family HEADER size dwg no A 66429			
				dr	J.W.BAIR	7/9/90						
				enrg	M.SYMK	7/9/90						
				chr	M.SYMK	7/9/90						
				appd	M.SYMK	7/9/90	scale 1:1	sheet 7 of				
sheet index	revision sheet											

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of FCI. Copyright FCI.

PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG. MATERIAL
66429-145	2x5	LP	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/ 2. 67	. 86/21, 84	30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni	A	PBT BLUE
↑ -146	↑		SQ	↑	↑	↑	. 105/ 2. 67	↑	150μ"/3. 81μm Sn	↑	↑
-147			RND	↑	↑	↑	. 150/3. 81		30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni		
-148			SQ	↑	↑	↑	. 150/3. 81		150μ"/3. 81μm Sn		
-149	↓		SQ	↓	↓	↓	. 675/17. 15	↓	30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni	↓	
-150	2x5		SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/17. 15	. 86/21, 84	150μ"/3. 81μm Sn	A	
-151	2x7		RND	1. 460/37. 08	. 600/15. 24	. 920/23. 37	. 105/2. 67	1. 06/26, 92	30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni	C	
-152	↑		SQ	↑	↑	↑	. 105/2. 67	↑	150μ"/3. 81μm Sn	↑	
-153	↑		RND	↑	↑	↑	. 150/3. 81		30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni		
-154			SQ	↑	↑	↑	. 150/3. 81		150μ"/3. 81μm Sn		
-155	↓		SQ	↓	↓	↓	. 675/17. 15	↓	30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni	↓	
-156	2x7		SQ	1. 460/37. 08	. 600/15. 24	. 920/23. 37	. 675/17. 15	1. 06/26, 92	150μ"/3. 81μm Sn	C	
-157	2x8		RND	1. 560/39. 62	. 700/17. 78	1. 020/25. 91	. 105/2. 67	1. 16/29, 46	30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni	D	
-158			SQ	↑	↑	↑	. 105/2. 67	↑	150μ"/3. 81μm Sn	↑	
-159			RND	↑	↑	↑	. 150/3. 81		30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni		
-160			SQ	↑	↑	↑	. 150/3. 81		150μ"/3. 81μm Sn		
-161			SQ	↓	↓	↓	. 675/17. 15	↓	30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni		
-162	2x8		SQ	1. 560/39. 62	. 700/17. 78	1. 020/25. 91	. 675/17. 15	1. 16/29, 46	150μ"/3. 81μm Sn		
-163	2x10		RND	1. 760/44. 70	. 900/22. 86	1. 220/30. 99	. 105/2. 67	1. 36/34, 54	30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni		
-164	↑		SQ	↑	↑	↑	. 105/2. 67	↑	150μ"/3. 81μm Sn		
-165			RND	↑	↑	↑	. 150/3. 81		30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni		
-166			SQ	↑	↑	↑	. 150/3. 81		150μ"/3. 81μm Sn		
-167	↓		SQ	↓	↓	↓	. 675/17. 15	↓	30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni		
-168	2x10		SQ	1. 760/ 44. 70	. 900/22, 860	1. 220/30. 99	. 675/17. 15	1. 36/34, 54	150μ"/3. 81μm Sn		
-169	2x13		RND	2. 060/52. 32	1. 200/30. 48	1. 520/38. 61	. 105/2. 67	1. 66/42, 16	30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni		
-170	↑		SQ	↑	↑	↑	. 105/2. 67	↑	150μ"/3. 81μm Sn		
-171			RND	↑	↑	↑	. 150/3. 81		30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni		
-172			SQ	↑	↑	↑	. 150/3. 81		150μ"/3. 81μm Sn		
-173	↓		SQ	↓	↓	↓	. 675/17. 15	↓	30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni		
-174	2x13		SQ	2. 060/52. 32	1. 200/30. 48	1. 520/38. 61	. 675/17. 15	1. 66/42. 16	150μ"/3. 81μm Sn		
-175	2x17		RND	2. 460/62. 48	1. 600/40. 64	1. 920/48. 77	. 105/2. 67	2. 06/52. 32	30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni		
-176	↑		SQ	↑	↑	↑	. 105/2. 67	↑	150μ"/3. 81μm Sn		
-177			RND	↑	↑	↑	. 150/3. 81		30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni		
-178			SQ	↑	↑	↑	. 150/3. 81		150μ"/3. 81μm Sn		
↓ -179	↓		SQ	↓	↓	↓	. 675/17. 15	↓	30μ"/0. 76μm Au OVER 50μ"/1. 27μm Ni</		



PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG. MATERIAL
66429-181	2x20	LP	RND	2.760/70.10	1.900/48.26	2.220/56.39	.105/ 2.67	2.36/59.94	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	D	PBT BLUE
↑ -182	↑	↑	SQ	↑	↑	↑	.105/ 2.67	↑	150µ"/3.81µm Sn	↑	↑
-183	↑	↑	RND	↑	↑	↑	.150/ 3.81	↑	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	↑	↑
-184	↑	↑	SQ	↑	↑	↑	.150/ 3.81	↑	150µ"/3.81µm Sn	↑	↑
-185	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	↓	↓
-186	2x20	↑	SQ	2.760/70.10	1.900/48.26	2.220/56.39	.675/17.15	2.36/59.94	150µ"/3.81µm Sn	↑	↑
-187	2x25	↑	RND	3.260/82.80	2.400/60.96	2.720/69.09	.105/ 2.67	2.86/72.64	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	↑	↑
-188	↑	↑	SQ	↑	↑	↑	.105/ 2.67	↑	150µ"/3.81µm Sn	↑	↑
-189	↑	↑	RND	↑	↑	↑	.150/ 3.81	↑	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	↑	↑
-190	↑	↑	SQ	↑	↑	↑	.150/ 3.81	↑	150µ"/3.81µm Sn	↑	↑
-191	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	↓	↓
-192	2x25	↑	SQ	3.260/ 82,8	2.400/60,960	2.720/69.09	.675/17.15	2.86/72.64	150µ"/3.81µm Sn	↑	↑
-193	2x30	↑	RND	3.760/ 95,5	2.900/73,660	3.220/81.79	.105/ 2.67	3.36/85.34	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	↑	↑
-194	↑	↑	SQ	↑	↑	↑	.105/ 2.67	↑	150µ"/3.81µm Sn	↑	↑
-195	↑	↑	RND	↑	↑	↑	.150/ 3.81	↑	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	↑	↑
-196	↑	↑	SQ	↑	↑	↑	.150/ 3.81	↑	150µ"/3.81µm Sn	↑	↑
-197	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	↓	↓
-198	2x30	↑	↑	3.760/ 95.50	2.900/73.66	3.220/81.79	.675/17.15	3.36/85.34	150µ"/3.81µm Sn	D	↑
-199	2x5	↑	↑	1.260/32.00	.400/10.16	.720/18.29	.105/ 2.67	.86/21.84	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	A	↑
-200	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	↑
-201	2x8	↑	↑	1.560/39.62	.700/17.78	1.020/25.91	↑	1.16/29.46	↑	D	↑
-202	2x10	↑	↑	1.760/44.70	.900/22.86	1.220/30.99	↑	1.36/34.54	↑	↑	↑
-203	2x13	↑	↑	2.060/52.32	1.200/30.48	1.520/38.61	↑	1.66/42.16	↑	↑	↑
-204	2x17	↑	↑	2.460/62.48	1.600/40.64	1.920/48.77	↑	2.06/52.32	↑	↑	↑
-205	2x20	↑	↑	2.760/70.10	1.900/48.26	2.220/56.39	↑	2.36/59.94	↑	↑	↑
-206	2x25	↓	↓	3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64	↓	↓	↓
-207	2x30	↑	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.105/ 2.67	3.36/85.34	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	D	↑
-208	2x5	↑	RND	1.260/32.00	.400/10.16	.720/18.29	.150/ 3.81	.86/21.84	30µ"/0.76µm GXT WITH Au FLASH	A	↑
-209	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	↑
-210	2x8	↑	↑	1.560/39.62	.700/17.78	1.020/25.91	↑	1.16/29.46	↑	D	↑
-211	2x10	↑	↑	1.760/44.70	.900/22.86	1.220/30.99	↑	1.36/34.54	↑	↑	↑
-212	2x13	↑	↑	2.060/52.32	1.200/30.48	1.520/38.61	↑	1.66/42.16	↑	↑	↑
-213	2x17	↑	↑	2.460/62.48	1.600/40.64	1.920/48.77	↑	2.06/52.32	↑	↑	↑
-214	2x20	↑	↑	2.760/70.10	1.900/48.26	2.220/56.39	↑	2.36/59.94	↑	↑	↑
-215	2x25	↓	↓	3.260/ 82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64	↓	↓	↓
66429-216	2x30	LP	RND	3.760/95.50	2.900/73.66	3.220/81.79	.150/ 3,81	3,36/85,34	30µ"/0.76µm GXT WITH Au FLASH	D	PBT BLUE

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3		
X					.XXX ±.005/.XX±.13	projection ⊕	title HEADER, QUICKIE SEA-HORSE, RIGHT-ANGLE
					.XXXX ±.0020/.XXX±.051		
				angles	0° ±2°	INCH/MM	product family size dwg no
				dr	J.W.BAIR 7/9/90		
				enr	M.SYMK 7/9/90	scale 1:1	code 66429
				chr	M.SYMK 7/9/90		
				appd	M.SYMK 7/9/90	sheet index	revision sheet




PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-217	2x5	ND	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/ 2. 67	. 86/21. 84	30µ"/0. 76µm GXT WITH Au FLASH	A	PBT BLUE
-218	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 92		C	
-219	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D	
-220	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 54			
-221	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16			
-222	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32			
-223	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94			
-224	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 64			
-225	2x30		RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/ 2. 67	3. 36/85. 34		D	
-226	2x5		SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/17. 15	. 86/21. 84		A	
-227	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 92		C	
-228	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D	
-229	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 54			
-230	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16			
-231	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32			
-232	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94			
-233	2x25			3. 260/ 82. 8	2. 400/60. 96	2. 720/69. 09		2. 86/72. 64			
-234	2x30	ND	SQ	3. 760/ 95. 5	2. 900/73. 66	3. 220/81. 79	. 675/17. 15	3. 36/85. 34		D	
-235	2x5	STD	RND	1. 260/ 32	. 400/10. 16	. 720/18. 29	. 105/ 2. 67	. 86/21. 84		A	
-236	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 92		C	
-237	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D	
-238	2x10			1. 760/ 44. 7	. 900/22. 86	1. 220/30. 99		1. 36/34. 54			
-239	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16			
-240	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32			
-241	2x20			2. 760/ 70. 1	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94			
-242	2x25			3. 260/ 82. 8	2. 400/60. 96	2. 720/69. 09		2. 86/72. 64			
-243	2x30		RND	3. 760/ 95. 5	2. 900/73. 66	3. 220/81. 79	. 105/ 2. 67	3. 36/85. 34		D	
-244	2x5		SQ	1. 260/ 32	. 400/10. 16	. 720/18. 29	. 675/17. 15	. 86/21. 84		A	
-245	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 92		C	
-246	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 46		D	
-247	2x10			1. 760/ 44. 7	. 900/22. 86	1. 220/30. 99		1. 36/34. 54			
-248	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 16			
-249	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 32			
-250	2x20			2. 760/ 70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 94			
-251	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 64			
66429-252	2x30	STD	SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/17. 15	3. 36/85. 34	30µ"/0. 76µm GXT WITH Au FLASH	D	PBT BLUE

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI	
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3	projection	www.fciconnect.com		
X					.XXX ±.005/.XX±.13		title		
				angles	.xxxx ±.0020/.xxx±.051		SEA-HORSE, RIGHT-ANGLE		
				dr	J.W.BAIR 7/9/90	INCH/MM	product family		
				enr	M.SYMK 7/9/90		HEADER		
				chr	M.SYMK 7/9/90	scale	size dwg no		
				appd	M.SYMK 7/9/90	1:1	A 66429		
sheet index	revision sheet						code		




PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-253	2x5	LP	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.84	30µ"/0.76µM GXT WITH Au FLASH	A	PBT BLUE
↑ -254	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	↑
-255	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-256	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54		↑	
-257	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16		↑	
-258	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32		↑	
-259	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94		↑	
-260	2x25		↓	3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64		↓	
-261	2x30		RND	3.760/95.50	2.900/73.66	3.220/81.79	.105/2.67	3.36/85.34		D	
-262	2x5		SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84		A	
-263	2x7		↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92		C	
-264	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-265	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54		↑	
-266	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16		↑	
-267	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32		↑	
-268	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94		↑	
-269	2x25		↓	3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64		↓	
-270	2x30	LP	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.675/17.15	3.36/85.34	30µ"/0.76µM GXT WITH Au FLASH	D	
-271	2x5	NO	RND	1.260/32.00	.400/10.16	.720/18.29	.105/ 2.67	.86/21.84	15µ"/0.3876µM GXT 50µ"/1.27µm Ni	A	
-272	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	
-273	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-274	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54		↑	
-275	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16		↑	
-276	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32		↑	
-277	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94		↑	
-278	2x25			3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64		↓	
-279	2x30			3.760/95.50	2.900/73.66	3.220/81.79	.105/ 2.67	3.36/85.34		D	
-280	2x5			1.260/32.00	.400/10.16	.720/18.29	.150/ 3.81	.86/21.84		A	
-281	2x7			1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92		C	
-282	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-283	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54		↑	
-284	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16		↑	
-285	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32		↑	
-286	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94		↑	
-287	2x25	↓	↓	3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64		↓	
66429-288	2x30	NO	RND	3.760/95.50	2.900/73.66	3.220/81.79	.150/ 3.81	3.36/85.34	15µ"/0.3876µM GXT 50µ"/1.27µm Ni	D	PBT BLUE

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3		
X					.XXX ±.005/.XX±.13	projection	title
					.xxx ±.0020/.xxx±.051		
				angles	0° ±2°		SEA-HORSE, RIGHT-ANGLE
				dr	J.W.BAIR 7/9/90		
				enr	M.SYMK 7/9/90	INCH/MM	product family
				chr	M.SYMK 7/9/90		
				appd	M.SYMK 7/9/90	scale	size dwg no
sheet index	revision sheet					1:1	A
							66429
							code
							sheet 11 of




PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-289	2x5	NO	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84	15μ"/0.38μm Au OVER 50μ"/1.27μm Ni	A	PBT BLUE
↑ -290	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	↑
-291	2x8	↑	↑	1.560/39.62	.700/17.78	1.020/25.91	↑	1.16/29.46	↑	D	↑
-292	2x10	↑	↑	1.760/44.70	.900/22.86	1.220/30.99	↑	1.36/34.54	↑	↑	↑
-293	2x13	↑	↑	2.060/52.32	1.200/30.48	1.520/38.61	↑	1.66/42.16	↑	↑	↑
-294	2x17	↑	↑	2.460/62.48	1.600/40.64	1.920/48.77	↑	2.06/52.32	↑	↑	↑
-295	2x20	↑	↑	2.760/70.10	1.900/48.26	2.220/56.39	↑	2.36/59.94	↑	↑	↑
-296	2x25	↓	↓	3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64	↓	↓	↓
-297	2x30	NO	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.675/17.15	3.36/85.34	↑	D	↑
-298	2x5	STD	RND	1.260/32.00	.400/10.16	.720/18.29	.105/ 2.67	.86/21.84	↑	A	↑
-299	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	↑
-300	2x8	↑	↑	1.560/39.62	.700/17.78	1.020/25.91	↑	1.16/29.46	↑	D	↑
-301	2x10	↑	↑	1.760/44.70	.900/22.86	1.220/30.99	↑	1.36/34.54	↑	↑	↑
-302	2x13	↑	↑	2.060/52.32	1.200/30.48	1.520/38.61	↑	1.66/42.16	↑	↑	↑
-303	2x17	↑	↑	2.460/62.48	1.600/40.64	1.920/48.77	↑	2.06/52.32	↑	↑	↑
-304	2x20	↑	↑	2.760/70.10	1.900/48.26	2.220/56.39	↑	2.36/59.94	↑	↑	↑
-305	2x25	↑	↑	3.260/82.80	2.400/60.96	2.720/69.09	↑	2.86/72.64	↑	↑	↑
-306	2x30	↑	↑	3.760/95.50	2.900/73.66	3.220/81.79	.105/2.67	3.36/85.34	↑	D	↑
-307	2x5	↑	↑	1.260/32.00	.400/10.16	.720/18.29	.150/3.81	.86/21.84	↑	A	↑
-308	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	↑
-309	2x8	↑	↑	1.560/39.62	.700/17.78	1.020/25.91	↑	1.16/29.46	↑	D	↑
-310	2x10	↑	↑	1.760/44.70	.900/22.86	1.220/30.99	↑	1.36/34.54	↑	↑	↑
-311	2x13	↑	↑	2.060/52.32	1.200/30.48	1.520/38.61	↑	1.66/42.16	↑	↑	↑
-312	2x17	↑	↑	2.460/62.48	1.600/40.64	1.920/48.77	↑	2.06/52.32	↑	↑	↑
-313	2x20	↑	↑	2.760/70.10	1.900/48.26	2.220/56.39	↑	2.36/59.94	↑	↑	↑
-314	2x25	↑	↓	3.260/82.80	2.400/60.96	2.720/69.09	↑	2.86/72.64	↑	↓	↑
-315	2x30	↑	RND	3.760/95.50	2.900/73.66	3.220/81.79	.150/3.81	3.36/85.34	↑	D	↑
-316	2x5	↑	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84	↑	A	↑
-317	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	↑
-318	2x8	↑	↑	1.560/39.62	.700/17.78	1.020/25.91	↑	1.16/29.46	↑	D	↑
-319	2x10	↑	↑	1.760/44.70	.900/22.86	1.220/30.99	↑	1.36/34.54	↑	↑	↑
-320	2x13	↑	↑	2.060/52.32	1.200/30.48	1.520/38.61	↑	1.66/42.16	↑	↑	↑
-321	2x17	↑	↑	2.460/62.48	1.600/40.64	1.920/48.77	↑	2.06/52.32	↑	↑	↑
-322	2x20	↑	↑	2.760/70.10	1.900/48.26	2.220/56.39	↑	2.36/59.94	↑	↑	↑
-323	2x25	↑	↓	3.260/82.80	2.400/60.96	2.720/69.09	↑	2.86/72.64	↑	↑	↑
66429-324	2x30	STD	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.675/17.15	3.36/85.34	15μ"/0.38μm Au OVER 50μ"/1.27μm Ni	D	PBT BLUE

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3		
X					.XXX ±.005/.XX±.13	projection	title HEADER, QUICKIE SEA-HORSE, RIGHT-ANGLE
					.XXX ±.0020/.XXX±.051		
				angles	0° ±2°	INCH/MM	product family
				dr	J.W.BAIR 7/9/90	scale	HEADER
				enr	M.SYMK 7/9/90	1:1	code
				chr	M.SYMK 7/9/90		—
				appd	M.SYMK 7/9/90		sheet
sheet index	revision sheet						12 of



PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-325	2x5	LP	RND	1.260/32.00	.400/10.16	.720/18.29	.105/ 2.67	.86/21.84	15µ"/0.38µm Au OVER 50µ"/1.27µm Ni	A	PBT BLUE
↑ -326	2x7	↑	↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92	↑	C	↑
-327	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-328	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54		↑	
-329	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16			
-330	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32			
-331	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94		↓	
-332	2x25			3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64			
-333	2x30			3.760/95.50	2.900/73.66	3.220/81.79	.105/ 2.67	3.36/85.34		D	
-334	2x5			1.260/32.00	.400/10.16	.720/18.29	.150/ 3.81	.86/21.84		A	
-335	2x7			1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92		C	
-336	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-337	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54		↑	
-338	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16			
-339	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32			
-340	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94			
-341	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.64			
-342	2x30		RND	3.760/95.50	2.900/73.66	3.220/81.79	.150/3.81	3.36/85.34		D	
-343	2x5		SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84		A	
-344	2x7		↑	1.460/37.08	.600/15.24	.920/23.37	↑	1.06/26.92		C	
-345	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.46		D	
-346	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.54		↑	
-347	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.16			
-348	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.32			
-349	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.94			
-350	2x25	↓	↓	3.260/82.80	2.400/60.96	2.720/69.09	↓	2.86/72.64			
-351	2x30	LP	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.675/17.15	3.36/85.34	15µ"/0.38µm Au OVER 50µ"/1.27µm Ni	D	
-352	UNAVAILABLE										
-353											
-354											
-355											
-356											
-357											
-358											
-359											
66429-360	UNAVAILABLE										PBT BLUE

mat'l. code --				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3		
X					.XXX ±.005/.XX±.13	projection	title HEADER, QUICKIE SEA-HORSE, RIGHT-ANGLE
					.XXX ±.0020/.XXX±.051		
				angles	0° ±2°	INCH/MM	product family
				dr	J.W.BAIR 7/9/90		HEADER
				enr	M.SYMK 7/9/90	scale	code
				chr	M.SYMK 7/9/90	1:1	-
				appd	M.SYMK 7/9/90		sheet
sheet index	revision sheet						13 of

PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-361									U N A V A I L A B L E		PBT BLUE
↑ -362	2x5	NO	RND	1.260/32.00	.400/10.16	.720/18.29	.105/ 2.67	.86/21.84	30μ"/0.76μm Au OVER 50μ"/1.27μm Ni	B	↑
-363	↑	NO	RND	↑	↑	↑	↑	↑	15μ"/0.38μm Au OVER 50μ"/1.27μm Ni	↑	
-364		NO	RND						30μ"/0.76μm GXT WITH Au FLASH		
-365		NO	SQ						150μ"/3.81μm Sn		
-366		STD	RND						30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
-367		STD	RND						15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
-368		STD	RND						30μ"/0.76μm GXT WITH Au FLASH		
-369		STD	SQ						150μ"/3.81μm Sn		
-370		LP	RND						30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
-371		LP	RND						15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
-372		LP	RND						30μ"/0.76μm GXT WITH Au FLASH		
-373		LP	SQ				.105/ 2.67		150μ"/3.81μm Sn		
-374		NO	RND				.150/ 3.81		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
-375		NO	RND				↑		15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
-376		NO	RND						30μ"/0.76μm GXT WITH Au FLASH		
-377		NO	SQ						150μ"/3.81μm Sn		
-378		STD	RND						30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
-379		STD	RND						15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
-380		STD	RND						30μ"/0.76μm GXT WITH Au FLASH		
-381		STD	SQ						150μ"/3.81μm Sn		
-382		LP	RND						30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
-383		LP	RND						15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
-384		LP	RND						30μ"/0.76μm GXT WITH Au FLASH		
-385		LP	SQ				.150/3.81		150μ"/3.81μm Sn		
-386		NO	SQ				.675/17.15		30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
-387		NO	↑				↑		15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
-388		NO							30μ"/0.76μm GXT WITH Au FLASH		
-389		NO							150μ"/3.81μm Sn		
-390		STD							30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
-391		STD							15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
-392		STD							30μ"/0.76μm GXT WITH Au FLASH		
-393		STD							150μ"/3.81μm Sn		
-394		LP							30μ"/0.76μm Au OVER 50μ"/1.27μm Ni		
↓ -395		LP	↓				↓		15μ"/0.38μm Au OVER 50μ"/1.27μm Ni		
66429-396	2x5	LP	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84	30μ"/0.76μm GXT WITH Au FLASH	B	PBT BLUE

Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

A

A

B

B

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3	projection	title	SEA-HORSE, RIGHT-ANGLE	
X					.XXX ±.005/.XX±.13	INCH/MM	product family	HEADER	
				angles	.XXX ±.0020/.XXX±.051	scale	size dwg no	code	
				dr	0° ±2°	1:1	A	66429	
				enr	J.W.BAIR 7/9/90			sheet	
				chr	M.SYMK 7/9/90			14 of	
				appd	M.SYMK 7/9/90				
sheet index	revision sheet								

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-397	2x5	LP	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.84	150µ"/3.81µm Sn	B	PBT BLUE
-398	2x10	66258-001	RND	1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.54	30µ"/0.76µm Au OVER 50µ"/1.27µm Ni	D	
-399	2x5	NO	SQ	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.84	15µ"/0.38µm Au OVER 50µ"/1.27µm Ni	A	
-400		STD					.105/2.67				
-401		LP					.105/2.67				
-402		NO					.150/3.81				
-403		STD					.150/3.81				
-404		LP					.150/3.81			A	
-405		NO					.150/3.81			B	
-406		STD					.150/3.81				
-407		LP					.150/3.81				
-408		NO					.150/3.81				
-409		STD					.150/3.81				
-410	2x5	LP		1.260/32.00	.400/10.16	.720/18.29	.150/3.81	.86/21.84		B	
-411	2x7	NO		1.460/37.08	.600/15.24	.920/23.37	.105/2.67	1.06/26.92		C	
-412		STD					.105/2.67				
-413		LP					.105/2.67				
-414		NO					.150/3.81				
-415		STD					.150/3.81				
-416	2x7	LP		1.460/37.08	.600/15.24	.920/23.37	.150/3.81	1.06/26.92		C	
-417	2x8	NO		1.560/39.62	.700/17.78	1.020/25.91	.105/2.67	1.16/29.46		D	
-418		STD					.105/2.67				
-419		LP					.105/2.67				
-420		NO					.150/3.81				
-421		STD					.150/3.81				
-422	2x8	LP		1.560/39.62	.700/17.78	1.020/25.91	.150/3.81	1.16/29.46			
-423	2x10	NO		1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.54			
-424		STD					.105/2.67				
-425		LP					.105/2.67				
-426		NO					.150/3.81				
-427		STD					.150/3.81				
-428	2x10	LP		1.760/44.70	.900/22.86	1.220/30.99	.150/3.81	1.36/34.54			
-429	2x13	NO		2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.16			
-430		STD					.105/2.67				
-431		LP					.105/2.67				
66429-432	2x13	NO	SQ	2.060/55.32	1.200/30.48	1.520/38.61	.150/3.81	1.66/42.16	15µ"/0.38µm Au OVER 50µ"/1.27µm Ni	D	PBT BLUE

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		 www.fciconnect.com																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3			projection		title	HEADER, QUICKIE SEA-HORSE, RIGHT-ANGLE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
X					.XXX ±.005/.XX±.13 .XXXX ±.0020/.XXX±.051																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
				angles	0° ±2°				scale	A	66429																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
				dr	J.W.BAIR	7/9/90																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
				engr	M.SYMK	7/9/90																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
				chr	M.SYMK	7/9/90																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
				appd	M.SYMK	7/9/90																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
sheet index	revision sheet																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					</

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of FCI. Copyright FCI.

PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19		STYLE	HSG MATERIAL			
66429-433	2x13	STD	SQ	2.060/52.32	1.200/30.48	1.520/38.61	.150/3.81	1.66/42.16	15µ"/.38µm Au OVER 50µ"/1.27µm Ni		D	PBT BLUE			
-434	2x13	LP		2.060/52.32	1.200/30.48	1.520/38.61	.150/3.81	1.66/42.16							
-435	2x17	NO		2.460/62.48	1.600/40.64	1.920/48.77	.105/2.67	2.06/52.32							
-436		STD					.105/2.67								
-437		LP					.105/2.67								
-438		NO					.150/3.81								
-439		STD					.150/3.81								
-440	2x17	LP		2.460/62.48	1.600/40.64	1.920/48.77	.150/3.81	2.06/52.32							
-441	2x20	NO		2.760/70.10	1.900/48.26	2.220/56.39	.105/2.67	2.36/59.94							
-442		STD					.105/2.67								
-443		LP					.105/2.67								
-444		NO					.150/3.81								
-445		STD					.150/3.81								
-446	2x20	LP		2.760/70.10	1.900/48.26	2.220/56.39	.150/3.81	2.36/59.94							
-447	2x25	NO		3.260/82.80	2.400/60.96	2.720/69.09	.105/2.67	2.86/72.64							
-448		STD					.105/2.67								
-449		LP					.105/2.67								
-450		NO					.150/3.81								
-451		STD					.150/3.81								
-452	2x25	LP		3.260/82.80	2.400/60.96	2.720/69.09	.150/3.81	2.86/72.64							
-453	2x30	NO		3.760/95.50	2.900/73.66	3.220/81.79	.105/2.67	3.36/85.34							
-454		STD					.105/2.67								
-455		LP					.105/2.67								
-456		NO					.150/3.81								
-457		STD					.150/3.81								
-458	2x30	LP	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.150/3.81	3.36/85.34							
-459	2x12	NO	RND	1.960/49.80	1.100/27.94	1.420/36.07	.105/2.67	1.56/39.62							
-460		STD													
-461		LP							15µ"/.38µm Au OVER 50µ"/1.27µm Ni						
-462		NO							30µ"/.76µm Au OVER 50µ"/1.27µm Ni						
-463		STD							30µ"/.76µm Au OVER 50µ"/1.27µm Ni						
-464		LP							30µ"/.76µm Au OVER 50µ"/1.27µm Ni						
-465		NO							30µ"/.76µm GXT WITH Au FLASH						
-466		STD							30µ"/.76µm GXT WITH Au FLASH						
-467		LP	RND						30µ"/.76µm GXT WITH Au FLASH						
66429-468	2x12	NO	SQ	1.960/ 49,8	1.100/27,940	1.420/36,07	.105/ 2,67	1.56/39,62	150µ"/3.81µm Sn		D	PBT BLUE			
mat'l. code --							tolerances unless otherwise specified			CUSTOMER COPY	 www.fciconnect.com				
ltr		ecn no		dr		date		linear		.XX ±.01/.X±.3		projection		title	
X										.XXX ±.005/.XX±.13				HEADER, QUICKIE	
										.XXXX ±.0020/.XXX±.051				SEA-HORSE, RIGHT-ANGLE	
								angles		0° ±2°					
								dr		J.W.BAIR 7/9/90				product family	
								engr		M.SYMK 7/9/90				HEADER	
								chr		M.SYMK 7/9/90		scale		code	
								appd		M.SYMK 7/9/90		1:1		sheet	
sheet index		revision sheet												16 of	

1



PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-505	2x15	STD	RND	2.260/ 57,4	1.400/35,560	1.720/43,69	.105/ 2,67	1.86/47,24	15µ"/.38µM Au OVER 50µ"/1.27µm Ni	D	PBT BLUE
-506		LP							15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-507		NO							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-508		STD							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-509		LP							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-510		NO							30µ"/.76µM GXTWITH Au FLASH		
-511		STD							30µ"/.76µM GXTWITH Au FLASH		
-512		LP	RND						30µ"/.76µM GXTWITH Au FLASH		
-513		NO	SQ						150µ"/3.81µm Sn		
-514		STD	SQ						150µ"/3.81µm Sn		
-515		LP	SQ				.105/ 2,67		150µ"/3.81µm Sn		
-516		NO	RND				.150/ 3,81		15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-517		STD							15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-518		LP							15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-519		NO							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-520		STD							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-521		LP							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-522		NO							30µ"/.76µM GXTWITH Au FLASH		
-523		STD							30µ"/.76µM GXTWITH Au FLASH		
-524		LP	RND						30µ"/.76µM GXTWITH Au FLASH		
-525		NO	SQ						150µ"/3.81µm Sn		
-526		STD							150µ"/3.81µm Sn		
-527		LP					.150/ 3,81		150µ"/3.81µm Sn		
-528		NO					.105/ 2,67		15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-529		STD							15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-530		LP							15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-531		NO							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-532		STD							30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-533		LP					.105/ 2,67		30µ"/.76µM Au OVER 50µ"/1.27µm Ni		
-534		NO					.150/ 3,81		15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-535		STD					.150/ 3,81		15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-536		LP					.150/ 3,81		15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-537		NO					.675/17,15		15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-538		STD							15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
-539		LP							15µ"/.38µM Au OVER 50µ"/1.27µm Ni		
66429-540	2x15	NO	SQ	2.260/ 57,4	1.400/35,560	1.720/43,69	.675/17,15	1.86/47,24	30µ"/.76µM Au OVER 50µ"/1.27µm Ni	D	PBT BLUE


mat'l. code --				tolerances unless otherwise specified		CUSTOMER COPY		www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3	projection 	title HEADER, QUICKIE SEA-HORSE, RIGHT-ANGLE	product family HEADER	code --
X					.XXX ±.005/.XX±.13				
					.XXXX ±.0020/.XXX±.051				
					angles 0° ±2°				
					dr J.W.BAIR 7/9/90				
				enr M.SYMK 7/9/90	INCH/MM	scale 1:1	A	66429	sheet 18 of
				chr M.SYMK 7/9/90					
				appd M.SYMK 7/9/90					
sheet index	revision sheet								

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

PRODUCT NO.	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL
66429-541	2x15	STD	SQ	2.260/ 57.40	1.400/35.56	1.720/43.69	.675/17.15	1.86/47.24	30µ"/.76µm Au OVER 50µ"/1.27µm Ni	D	PBT BLUE
-542		LP							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-543		NO							30µ"/.76µm GXTWITH Au FLASH		
-544		STD							30µ"/.76µm GXTWITH Au FLASH		
-545		LP							30µ"/.76µm GXTWITH Au FLASH		
-546		NO							150µ"/3.81µm Sn		
-547		STD							150µ"/3.81µm Sn		
-548	2x15	LP	SQ	2.260/57.40	1.400/35.56	1.720/43.69	.675/17.15	1.86/47.24	150µ"/3.81µm Sn		
-549	2x22	NO	RND	2.960/75.20	2.100/53.34	2.420/61.47	.105/2.06	2.56/65.02	15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-550		STD							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-551		LP							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-552		NO							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-553		STD							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-554		LP							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-555		NO							30µ"/.76µm GXTWITH Au FLASH		
-556		STD							30µ"/.76µm GXTWITH Au FLASH		
-557		LP	RND						30µ"/.76µm GXTWITH Au FLASH		
-558		NO	SQ						150µ"/3.81µm Sn		
-559		STD	SQ						150µ"/3.81µm Sn		
-560		LP	SQ				.105/2.67		150µ"/3.81µm Sn		
-561		NO	RND				.150/3.81		15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-562		STD							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-563		LP							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-564		NO							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-565		STD							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-566		LP							30µ"/.76µm Au OVER 50µ"/1.27µm Ni		
-567		NO							30µ"/.76µm GXTWITH Au FLASH		
-568		STD							30µ"/.76µm GXTWITH Au FLASH		
-569		LP	RND						30µ"/.76µm GXTWITH Au FLASH		
-570		NO	SQ						150µ"/3.81µm Sn		
-571		STD							150µ"/3.81µm Sn		
-572		LP					.150/3.81		150µ"/3.81µm Sn		
-573		NO					.105/2.67		15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-574		STD							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
-575		LP							15µ"/.38µm Au OVER 50µ"/1.27µm Ni		
66429-576	2x22	NO	SQ	2.960/ 75,2	2.100/53,340	2.420/61,47	.105/ 2,67	2.56/65,02	30µ"/.76µm Au OVER 50µ"/1.27µm Ni	D	PBT BLUE

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3		
X					.XXX ±.005/.XX±.13	projection	title HEADER, QUICKIE SEA-HORSE, RIGHT-ANGLE
					.XXX ±.0020/.XXX±.051		
				angles	0° ±2°	INCH/MM	product family
				dr	J.W.BAIR 7/9/90		HEADER
				enr	M.SYMK 7/9/90	scale	code
				chr	M.SYMK 7/9/90	1:1	-
				appd	M.SYMK 7/9/90		sheet
sheet index	revision sheet						19 of




A

B

PRODUCT NUMBER	SIZE	LATCHES NOTE 9	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 19	STYLE	HSG MATERIAL	NOTE 13
66429-577	2x22	STD	SQ	2.960/75.18	2.100/53.34	2.420/61.47	.105/2.67	2.56/65.02	30u"/.76u Au OVER 50u"/1.27u NI	D	PBT BLUE	
-578		LP					.105/2.67		30u"/.76u Au OVER 50u"/1.27u NI			
-579		NO					.150/3.81		15u"/.38u Au OVER 50u"/1.27u NI			
-580		STD					.150/3.81		15u"/.38u Au OVER 50u"/1.27u NI			
-581		LP					.150/3.81		15u"/.38u Au OVER 50u"/1.27u NI			
-582		NO					.675/17.15		15u"/.38u Au OVER 50u"/1.27u NI			
-583		STD							15u"/.38u Au OVER 50u"/1.27u NI			
-584		LP							30u"/.76u Au OVER 50u"/1.27u NI			
-585		NO							30u"/.76u Au OVER 50u"/1.27u NI			
-586		STD							30u"/.76u Au OVER 50u"/1.27u NI			
-587		LP							30u"/.76u Au OVER 50u"/1.27u NI			
-588		NO							30u"/.76u GXT/GOLD FLASH			
-589		STD							30u"/.76u GXT/GOLD FLASH			
-590		LP							30u"/.76u GXT/GOLD FLASH			
-591		NO							150u"/3.18u Sn			
-592		STD							150u"/3.18u Sn			
-593	2x22	LP	SQ	2.960/75.18	2.100/53.34	2.420/61.47	.675/17.15	2.56/65.02	150u"/3.18u Sn	D		
-594									UNAVAILABLE			
-595	2x13	STD	RND	2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.2	50u"/1.27u Au OVER 50u"/1.27u NI	D		
-596	2x17	STD		2.460/62.48	1.600/40.64	1.920/48.77	.150/3.81	2.06/53.3		D		
-597	2x7	LP		1.460/37.08	.600/15.24	.920/23.67	.105/2.67	1.06/26.9		C		
-598	2x13	LP		2.060/52.32	1.200/30.48	1.520/38.61	.150/3.81	1.66/42.2		D		
-599	2x13	NO		2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.2		D		
-600	2x17	NO		2.460/62.48	1.600/40.64	1.920/48.77	.150/3.81	2.06/53.3		D		
-601	2x7	NO		1.460/37.08	.600/15.24	.920/23.67	.105/2.67	1.06/26.9		C		
-602	2x13	NO	RND	2.060/52.32	1.200/30.48	1.520/38.61	.150/3.81	1.66/42.2	50u"/1.27u Au OVER 50u"/1.27u NI	D		
-603	2x13	STD	SQ	2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.2	30u"/.76u GXT/GOLD FLASH	D		
-604	2x13	NO	SQ	2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.2	30u"/.76u GXT/GOLD FLASH	D		
-605	2x25	STD	SQ	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u GXT/GOLD FLASH	D		
-606	2x25	NO	SQ	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u GXT/GOLD FLASH	D		
-607	2x25	STD	RND	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u Au OVER 50u"/1.27u NI	E		
-608	2x25	NO	RND	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u Au OVER 50u"/1.27u NI	E		
-609	2x25	STD	RND	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u Au OVER 50u"/1.27u NI	E		
-610	2x25	NO	RND	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u Au OVER 50u"/1.27u NI	E	PBT BLUE	NOTE 13
-611	2x25	STD	RND	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u Au OVER 50u"/1.27u NI	D	PBT BLACK	NOTE 14
-612	2x25	NO	RND	3.260/82.80	2.400/60.69	2.720/69.09	.105/2.67	2.86/72.6	30u"/.76u Au OVER 50u"/1.27u NI	D	PBT BLACK	NOTE 14
66429-734	2x17	LP	RND	2.460/62.48	1.600/40.64	1.920/48.77	.105/2.66	2.06/53.3	30u"/.76u Au OVER 50u"/1.27u NI	D	PCT BLACK	NOTE 15

A

B

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3		
X					.XXX ±.005/.XX±.13	projection	title
					.XXX ±.0020/.XXX±.051		
				angles	0° ±2°		product family
				dr	J.W.BAIR 7/9/90		
				enr	M.SYMK 7/9/90	INCH/MM	size dwg no
				chr	M.SYMK 7/9/90		
				appd	M.SYMK 7/9/90	scale	A
sheet index	revision sheet					1:1	66429
							20 of

cage code