
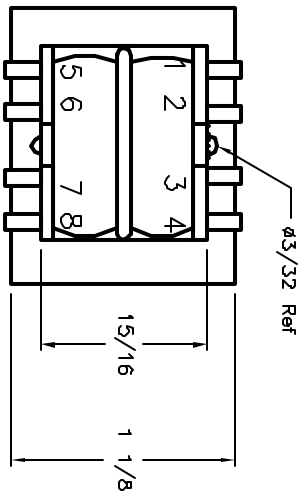
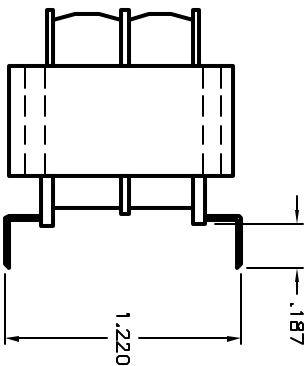
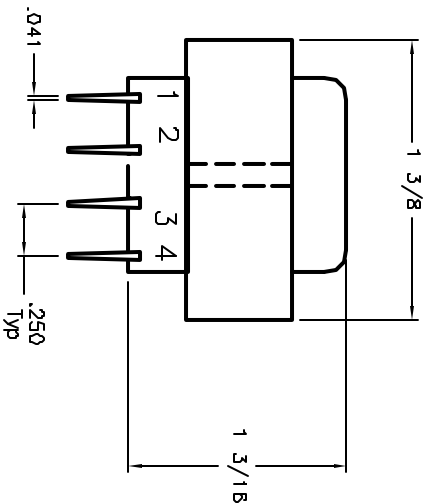


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-FD00A.DWG

REVISIONS				DOC. NO. SPC-FD00A	Effective 7/8/02				DCP No. 1308
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
1977	A	Released	JWM	02/1/06	JN	07/22/08	JN	07/22/08	



Electrical Characteristics

Primary

Pri #1 115v +/-15%REQ: (50, 60)Hz

Pri #2 115v +/-15%REQ: (50, 60)Hz

Secondary

Series 36vct @ 65mARMS


Parallel 18v @ 130mARMS

REGULATION: 26.8% APPROX

Transformer Isolation

Pri/Pri 500v Pri/Sec 2500v

Sec/Sec 500v Wind/Core 2500v

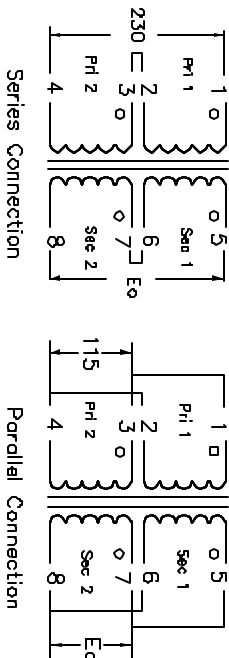

DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED,

DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	2/1/06
CHECKED BY:	DATE:
Jason Nash	07/22/08
APPROVED BY:	DATE:
Jason Nash	07/22/08

DRAWING TITLE:

Transformer, PC Board, Split bobbin

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC20973	10M557.dwg	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1