

# Thru-Hole Tuning Fork



Model: NC15LF/NC26LF/NC38LF

RoHS Compliant / pB Free

Rev. 1/13/2012

[http://www.foxonline.com/need\\_a\\_sample.htm](http://www.foxonline.com/need_a_sample.htm)

## FEATURES

- Miniature Packages
- Low Cost
- Cold Weld Design
- Long Term Stability
- Tight Tolerance

[Click to view mounting precautions](#)

Need a

Sample®

## • PART NUMBER SELECTION [Learn More](#) - Internet Required

| Part Number           | Model Number | Frequency Stability            | Operating Temperature | Frequency  |
|-----------------------|--------------|--------------------------------|-----------------------|------------|
| 298LF-Frequency-xxxxx | NC15LF       | -0.04 PPM / (Δ°C) <sup>2</sup> | -20 °C ~ +60 °C       | 32.768 kHz |
| 299LF-Frequency-xxxxx | NC26LF       | -0.04 PPM / (Δ°C) <sup>2</sup> | -20 °C ~ +60 °C       | 32.768 kHz |
| 300LF-Frequency-xxxxx | NC38LF       | -0.04 PPM / (Δ°C) <sup>2</sup> | -20 °C ~ +60 °C       | 32.768 kHz |


## • STANDARD SPECIFICATIONS

| PARAMETERS                                     | MAX (unless otherwise noted)          |
|------------------------------------------------|---------------------------------------|
| Frequency                                      | 32.768 kHz                            |
| Frequency Tolerance @ 25°C                     | ± 20 PPM                              |
| Frequency Stability Temperature Coefficient    | -0.04 PPM / (Δ°C) <sup>2</sup>        |
| Temperature Range                              |                                       |
| Turnover (T <sub>O</sub> )                     | +20°C ~ +30°C                         |
| Operating (T <sub>OPR</sub> )                  | -20°C ~ +60°C                         |
| Storage (T <sub>STG</sub> )                    | -30°C ~ +70°C                         |
| Equivalent Series Resistance (R <sub>s</sub> ) |                                       |
| NC15 / NC26                                    | 50 kΩ                                 |
| NC38                                           | 35 kΩ                                 |
| Load Capacitance (C <sub>L</sub> )             | 12.5 pF (Standard)<br>6 pF (Optional) |
| Insulation Resistance @ 100VDC                 | 500 MΩ Min                            |
| Drive Level                                    | 1.0 μW                                |
| Aging per year                                 | ±3 PPM                                |

All specifications subject to change without notice.




Note: Can should not be soldered to the circuit board or grounded. If securing the can to the board is desired, a rubber adhesive is recommended.

## Parabolic Temperature Curve

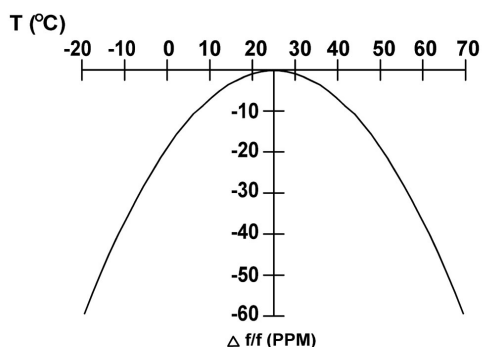

To determine frequency stability, use parabolic curvature (K).  
For example: What is stability at 45°C?

- 1) Change in T (°C) = 45-25 = 20°C
- 2) Change in frequency = -0.04 PPM \* (ΔC)<sup>2</sup>  
= -0.04 PPM \* (20)<sup>2</sup>  
= -16.0 PPM

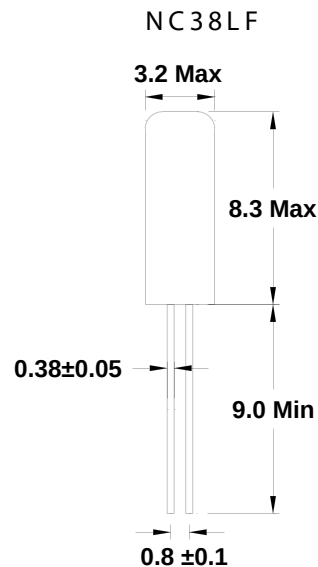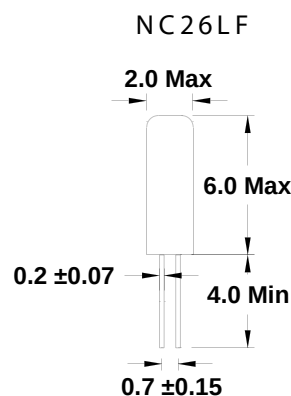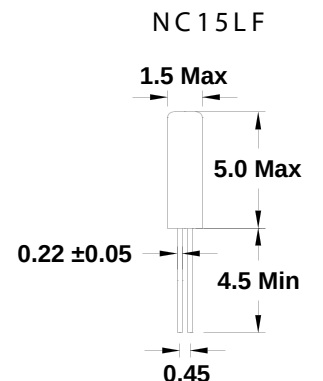

All dimensions are in millimeters.

**Canada**  
Tel: 239.464.2501

**EMEA**  
Tel: +44.1283.568153

**Asia**  
Tel: +852.2854.4285

**Singapore**  
Tel: +65.6844798



**Japan**  
Tel: +81.3.3374.2079

## 1. Mounting Precautions

### 1.1 Lead Type Crystal Units



#### 1.1.1. Structure

Tubular crystal units are hermetically sealed using glass (see Figures 1 and 2).

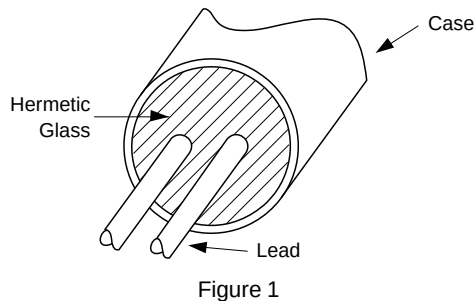

#### 1.1.2 Unbending the lead

- (1) DO NOT pull the lead excessively if unbending a lead or removing a crystal unit. The excessive force may crack the glass and reduce the degree of vacuum. This may eventually result in deterioration of the characteristics and may also break the crystal chip see Figure 3).
- (2) Unbend the lead by pressing on the bent part from both the upper and lower sides with fixing the bottom of lead tightly. (see Figure 4).

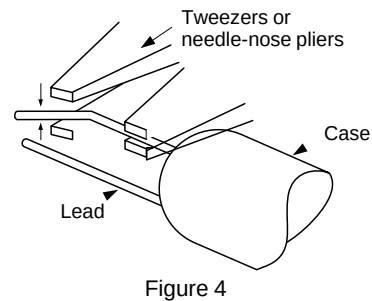

### 1.1.3 Bending the lead

- (1) Bend the lead so that the lead will remain straight for more than 0.5mm from the case when soldering a crystal unit after bending. If not, the glass may be cracked (see Figures 5 and 6).
- (2) Always leave a length greater than the case diameter when bending a lead after soldering (see Figure 7).

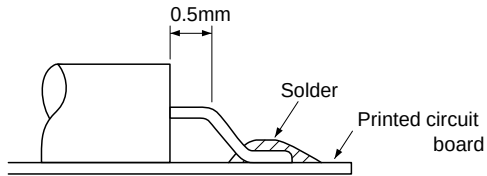


Figure 5

Soldering directly to the case will reduce the degree of vacuum and may result in deterioration of the characteristics and may break the crystal chip.

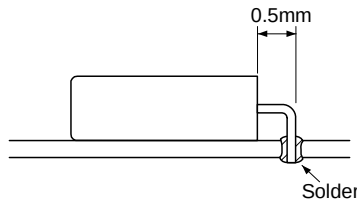


Figure 6




Figure 7

Make the length from the case to the printed circuit board (L) longer than the case diameter (D) so that the lead wire will not be pulled in case the crystal unit falls over.

### 1.1.4 Soldering

When mounting or removing a quartz crystal unit, heat the lead part at 300°C or lower for 5 seconds or less (in the case of a lead-type conventional product). A long period of time of heating may result in deterioration of the characteristics and may break the crystal unit. Be sure to keep the case at or below 150°C.