


Silicon Switching Diode

- Switching applications
- High breakdown voltage

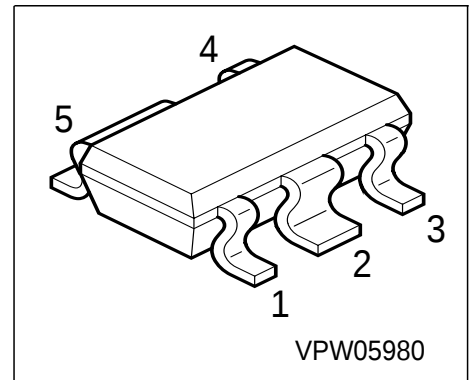

Type	Marking	Pin Configuration					Package
BAW78M	GDs	1 = A	2 = C	3 n.c.	4 n.c.	5 = C	SCT595

Maximum Ratings

Parameter	Symbol	Values	Unit
Diode reverse voltage	V_R	400	V
Peak reverse voltage	V_{RM}	400	
Forward current	I_F	1	A
Peak forward current	I_{FM}	1	
Surge forward current, $t = 1 \mu s$	I_{FS}	10	
Total power dissipation, $T_S \leq 110^\circ C$	P_{tot}	1	W
Junction temperature	T_j	150	$^\circ C$
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance


Junction - soldering point ¹⁾	R_{thJS}	≤ 40	K/W
--	------------	-----------	-----

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC characteristics					
Breakdown voltage $I_{(BR)} = 100\ \mu\text{A}$	$V_{(BR)}$	400	-	-	V
Forward voltage $I_F = 1\ \text{A}$	V_F	-	-	1.6	
$I_F = 2\ \text{A}$		-	-	2	
Reverse current $V_R = 400\ \text{V}$	I_R	-	-	1	μA
Reverse current $V_R = 400\ \text{V}, T_A = 150\ ^\circ\text{C}$	I_R	-	-	50	
AC characteristics					
Diode capacitance $V_R = 0\ \text{V}, f = 1\ \text{MHz}$	C_D	-	10	-	pF
Reverse recovery time $I_F = 200\ \text{mA}, I_R = 200\ \text{mA}, R_L = 100\ \Omega$, measured at $I_R = 20\text{mA}$	t_{rr}	-	1	-	μs


Test circuit for reverse recovery time

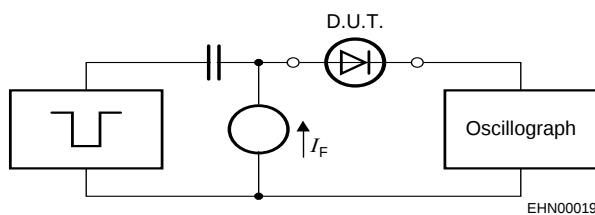


Pulse generator: $t_p = 10\ \mu\text{s}$, $D = 0.05$,
 $t_r = 0.6\ \text{ns}$, $R_i = 50\ \Omega$

Oscilloscope: $R = 50\ \Omega$, $t_r = 0.35\ \text{ns}$,
 $C \leq 1\ \text{pF}$

Forward current $I_F = f(T_S)$

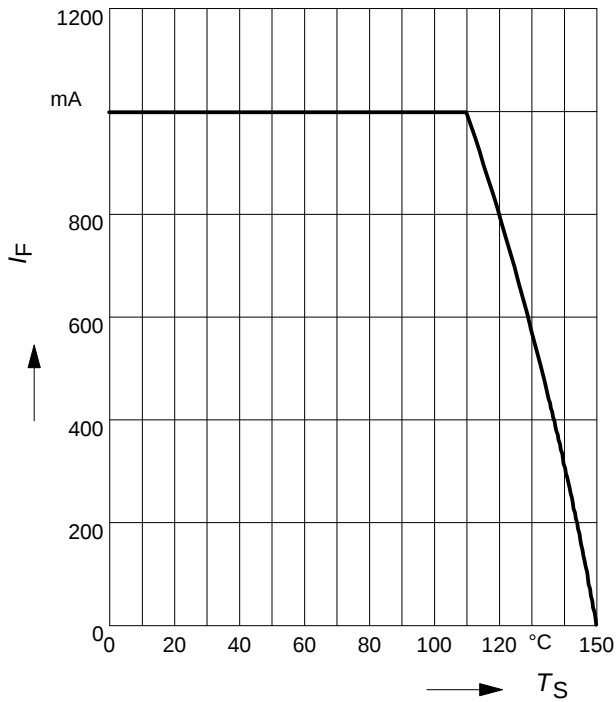


Permissible Pulse Load $R_{thJS} = f(t_p)$

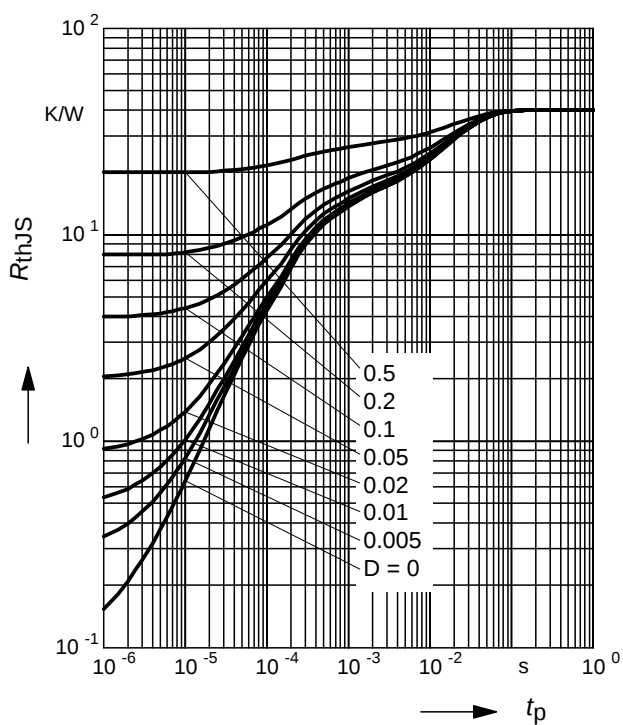


Permissible Pulse Load

$$I_{Fmax} / I_{FDC} = f(t_p)$$

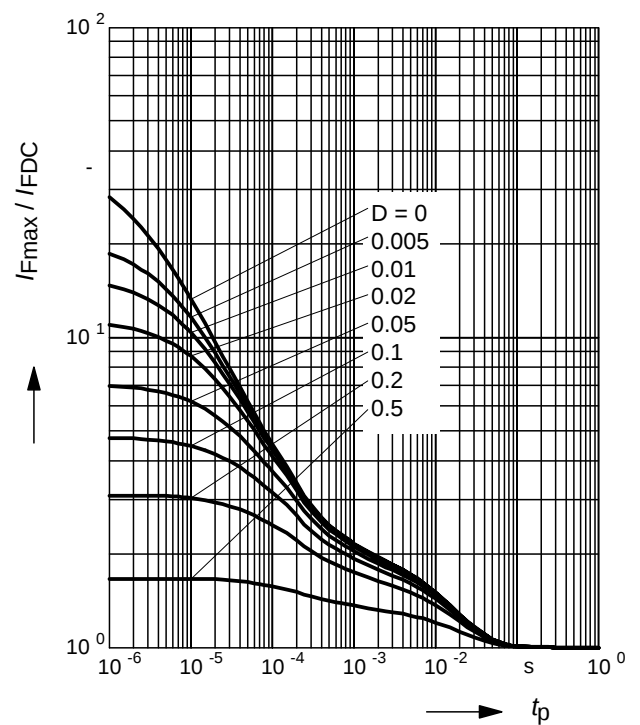

Forward current $I_F = f(V_F)$

$T_A = 25^\circ\text{C}$

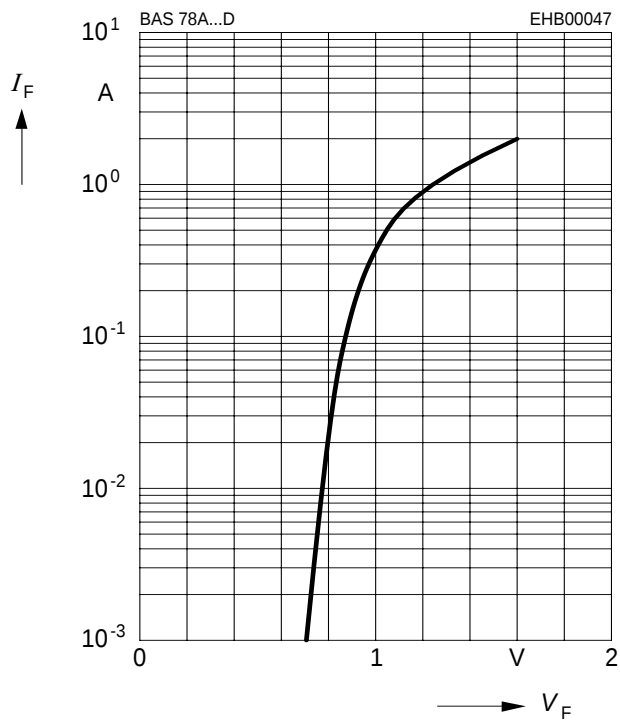

Reverse current $I_R = f(T_A)$

$V_R = 400\text{V}$

