
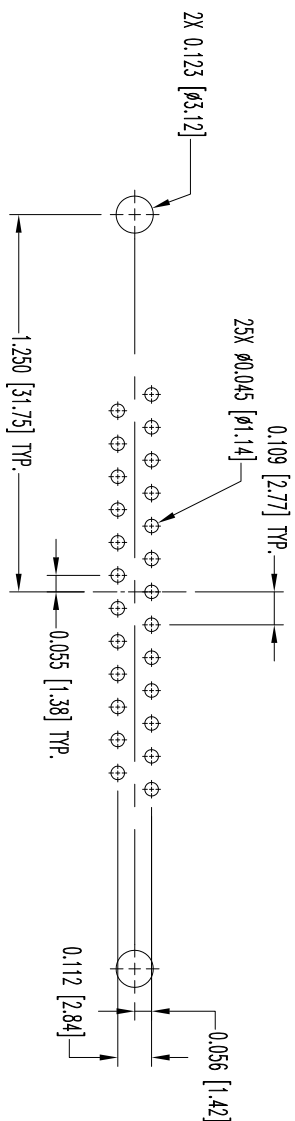
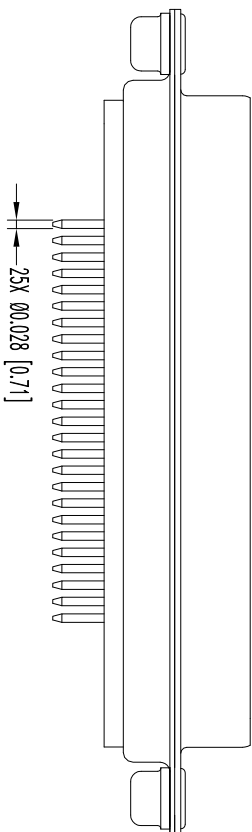
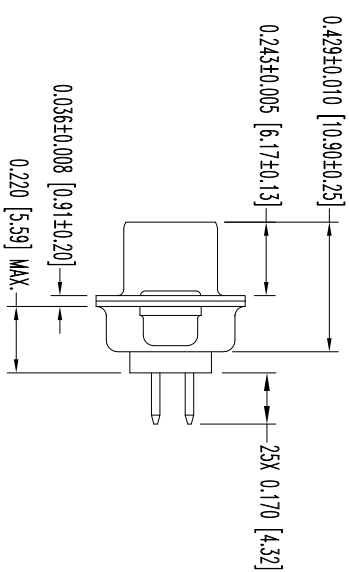


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK, POSITRONIC ASSUMES NO RESPONSIBILITY FOR SUCH INFORMATION IN WHOLE OR IN PART.

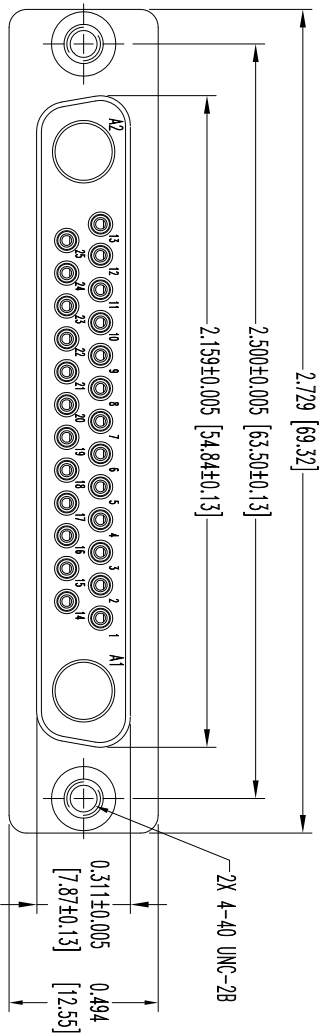

CONTACT HOLE PATTERN

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927 UL 94V-0, BLUE COLOR.
CONTACTS: PRECISION MACHINED COPPER ALLOY WITH 0.000050 [1.27µ] GOLD OVER NICKEL FINISH.
SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
CLINCH NUTS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
 2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY COMBO-D PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/1/STANDARDENSITYCOMBO-D-OR-CONNECTPOSITRONIC.COM.
 3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.
 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION/RECORD	APP	DR	CK
8-04-09	01	ECO 31055	RCW	BS	TK
12-9-10	A	ECO 33391	COLF	BE	COLF
12-11-12	B	ECO 37986	COLF	BE	COLF



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

DATE: 8-04-09

DRAWING NUMBER: SK10748

DCIML TOL. ± 0.015 [0.38]

ANGULAR TOL. ± 5°

SCALE: N.T.S.

DRAWN BY: B SHELLBOY

APPROVED BY: R WILLIAMS

TITLE: CBM27W2S3S5000/AA

CBM SERIES

FSCM 28198

8-04-09

SK10748

REV. B