


FED. MFG. CODE 91929




CATALOG LISTING
602HE1-6

CATALOG LISTING

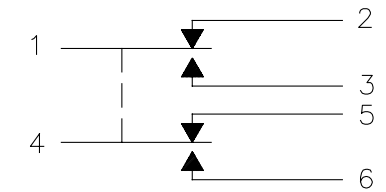

CIRCUIT DIAGRAM

—(6) NO. 20 WIRE LEAD PER MIL-W-22759/7 MARKED WITH CIRCUIT IDENTIFICATION AND WIRE GAGE (1-20, 2-20, ETC) PER MIL-W-5088

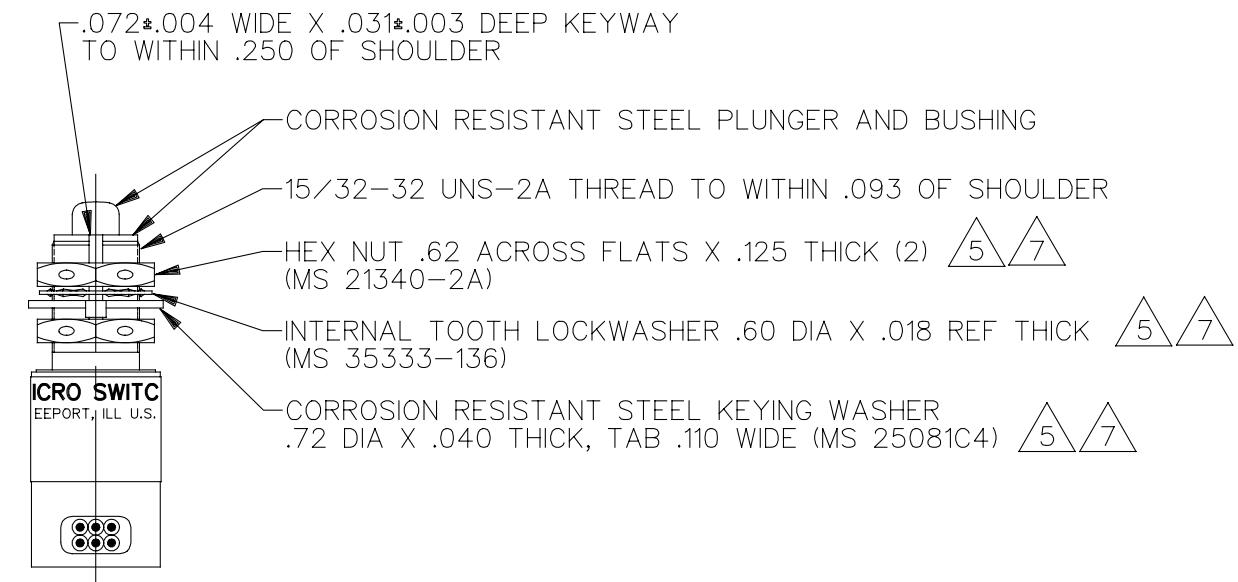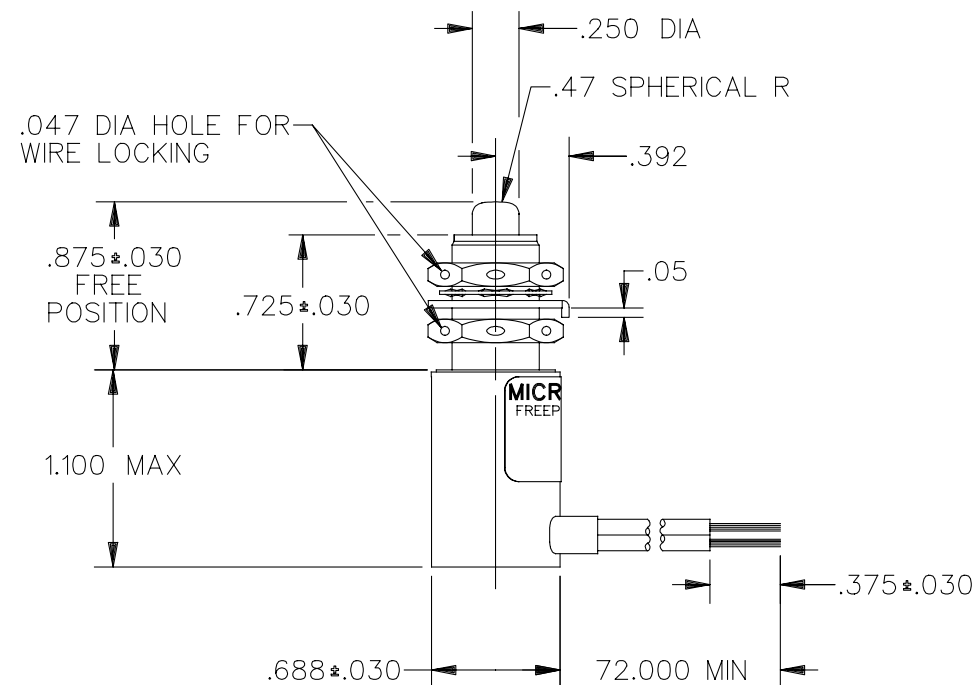

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

SCALE	FULL
-------	------

DO NOT SCALE PRINT

ELECTRICAL DATA	
-----------------	--

CONTACT ARRANGEMENT
S P D T (2)

RES	7
IND	4
MOTOR	4

TOLERANCES


APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE $\pm$

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X,X	0.4/.016	X,X	0.8/.03
TWO PLACES	X,XX	0.15/.006	X,XX	0.38/.015
THREE PLACES			X,XXX	0.13/.005
ANGLES				

	SI METRIC	US CUSTOMAR
--	-----------	-------------

DESIGN UNITS ☐

THIRD ANGLE PROJECTION



WEIGHT

NOTES

- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 5
 - 3 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 INCH OF PLUNGER TRAVEL
 - 4 - CIRCUIT DIAGRAM, AND CATALOG LISTING SHOWN ON NAMEPLATE
 - 5 - REPLACEMENT MOUNTING HARDWARE - PACKET 19PA9
 - 6 - FOR OPERATION IN TEMPERATURE OF MINUS 65°F TO PLUS 257°F
 - 7 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805