




16 x 4 Character LCD



Φ	- <u> </u>	
Φ		()

FEATURES

• Type: Character

• Display format: 16 x 4 characters

• Built-in controller: KS 0066 (or equivalent)

• Duty cycle: 1/16

• 5 x 8 dots includes cursor

- + 5 V power supply (also available for + 3 V)
- B/L to be driven by pin 1, pin 2, pin 15, pin 16 or A and K
- N.V. optional for + 3 V power supply
- Compliant to RoHS directive 2002/95/EC

MECHANICAL DATA									
ITEM	STANDARD VALUE	UNIT							
Module Dimension	70.6 x 60.0								
Viewing Area	60.0 x 32.6								
Dot Size	0.55 x 0.55	mm							
Dot Pitch	0.60 x 0.60								
Mounting Hole	65.6 x 50.0								
Character Size	2.95 x 4.75								

ABSOLUTE MAXIMUM RATINGS									
ITEM	CVMDOL	STAN	IDARD V	ALUE	LINIT				
IIEW	SYMBOL	MIN.	TYP.	MAX.	UNIT				
Power Supply	V _{DD} to V _{SS}	- 0.3	-	7.0	V				
Input Voltage	VI	- 0.3	-	V_{DD}	V				

Note

• V_{SS} = 0 V, V_{DD} = 5.0 V

ELECTRICAL CHARACTERISTICS									
ITEM	SYMBOL	CONDITION	ST	UNIT					
ITEM	STWIBUL	CONDITION	MIN. TYP. MAX.		MAX.	UNII			
Input Voltage	V_{DD}	V _{DD} = + 5 V	4.7	5.0	5.3	V			
input voitage	V DD	V _{DD} = + 3 V	2.7	3.0	5.3]			
Supply Current	I _{DD}	V _{DD} = + 5 V	-	1.65	-	mA			
		- 20 °C	5.0	5.1	5.7				
Recommended LC Driving		0 °C	4.6	4.8	5.2				
Voltage for Normal Temperature	V_{DD} to V_{0}	25 °C	4.1	4.5	4.7	V			
Version Module		50 °C	3.9	4.2	4.5				
		70 °C	3.7	3.9	4.3				
EL Power Supply Current	I _{EL}	V _{EL} = 110 V _{AC} , 400 Hz	=	=	5.0	mA			

OPTIONS											
		PROCES		BACK	LIGHT						
TN	STN Gray	STN Yellow	STN Blue	FSTN B&W	STN Color	None	LED	EL	CCFL		
х	х	х	х			х	х	х			


For detailed information, please see the "Product Numbering System" document.

16 x 4 Character LCD



DISPLAY CHARACTER ADDRESS CODE															
Display Position															
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F
40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F
10	11	12	13	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F
50	51	52	53	54	55	56	57	58	59	5A	5B	5C	5D	5E	5F
	1 00 40	1 2 00 01 40 41	1 2 3 00 01 02 40 41 42	1 2 3 4 00 01 02 03 40 41 42 43	1 2 3 4 5 00 01 02 03 04 40 41 42 43 44 10 11 12 13 14	1 2 3 4 5 6 00 01 02 03 04 05 40 41 42 43 44 45 10 11 12 13 14 15	1 2 3 4 5 6 7 00 01 02 03 04 05 06 40 41 42 43 44 45 46 10 11 12 13 14 15 16	1 2 3 4 5 6 7 8 00 01 02 03 04 05 06 07 40 41 42 43 44 45 46 47 10 11 12 13 14 15 16 17	1 2 3 4 5 6 7 8 9 00 01 02 03 04 05 06 07 08 40 41 42 43 44 45 46 47 48 10 11 12 13 14 15 16 17 18	1 2 3 4 5 6 7 8 9 10 00 01 02 03 04 05 06 07 08 09 40 41 42 43 44 45 46 47 48 49 10 11 12 13 14 15 16 17 18 19	1 2 3 4 5 6 7 8 9 10 11 00 01 02 03 04 05 06 07 08 09 0A 40 41 42 43 44 45 46 47 48 49 4A 10 11 12 13 14 15 16 17 18 19 1A	1 2 3 4 5 6 7 8 9 10 11 12 00 01 02 03 04 05 06 07 08 09 0A 0B 40 41 42 43 44 45 46 47 48 49 4A 4B 10 11 12 13 14 15 16 17 18 19 1A 1B	1 2 3 4 5 6 7 8 9 10 11 12 13 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 40 41 42 43 44 45 46 47 48 49 4A 4B 4C 10 11 12 13 14 15 16 17 18 19 1A 1B 1C	1 2 3 4 5 6 7 8 9 10 11 12 13 14 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 40 41 42 43 44 45 46 47 48 49 4A 4B 4C 4D 10 11 12 13 14 15 16 17 18 19 1A 1B 1C 1D	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 40 41 42 43 44 45 46 47 48 49 4A 4B 4C 4D 4E 10 11 12 13 14 15 16 17 18 19 1A 1B 1C 1D 1E

INTERFACE PIN FUNCTION						
PIN NO.	SYMBOL	FUNCTION				
1	V _{SS}	Ground				
2	V _{DD}	+ 3 V or + 5 V				
3	V ₀	Contrast adjustment				
4	RS	H/L register select signal				
5	R/W	H/L read/write signal				
6	E	$ extsf{H} ightarrow extsf{L}$ enable signal				
7	DB0	H/L data bus line				
8	DB1	H/L data bus line				
9	DB2	H/L data bus line				
10	DB3	H/L data bus line				
11	DB4	H/L data bus line				
12	DB5	H/L data bus line				
13	DB6	H/L data bus line				
14	DB7	H/L data bus line				
15	A/V _{EE}	+ 4.2 V for LED ($R_A = 0 \Omega$)/negative voltage output				
16	К	Power supply for B/L (0 V)				

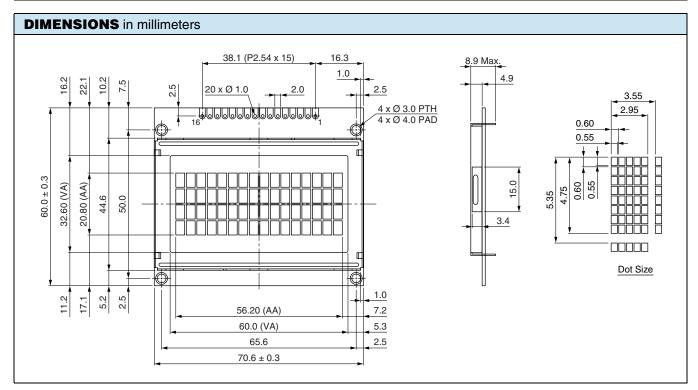

Document Number: 37306 Revision: 30-Oct-08



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

L016N004BYYHET0000