

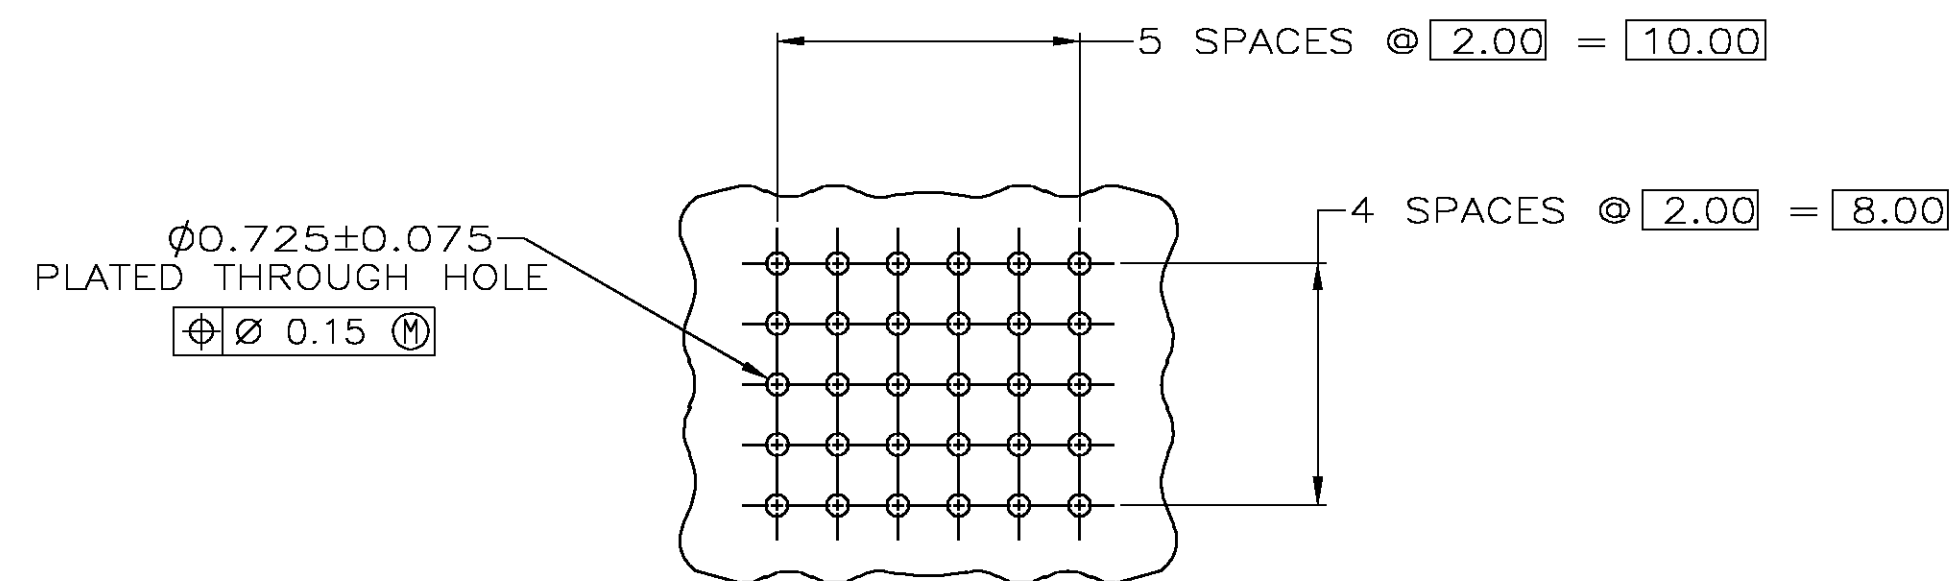
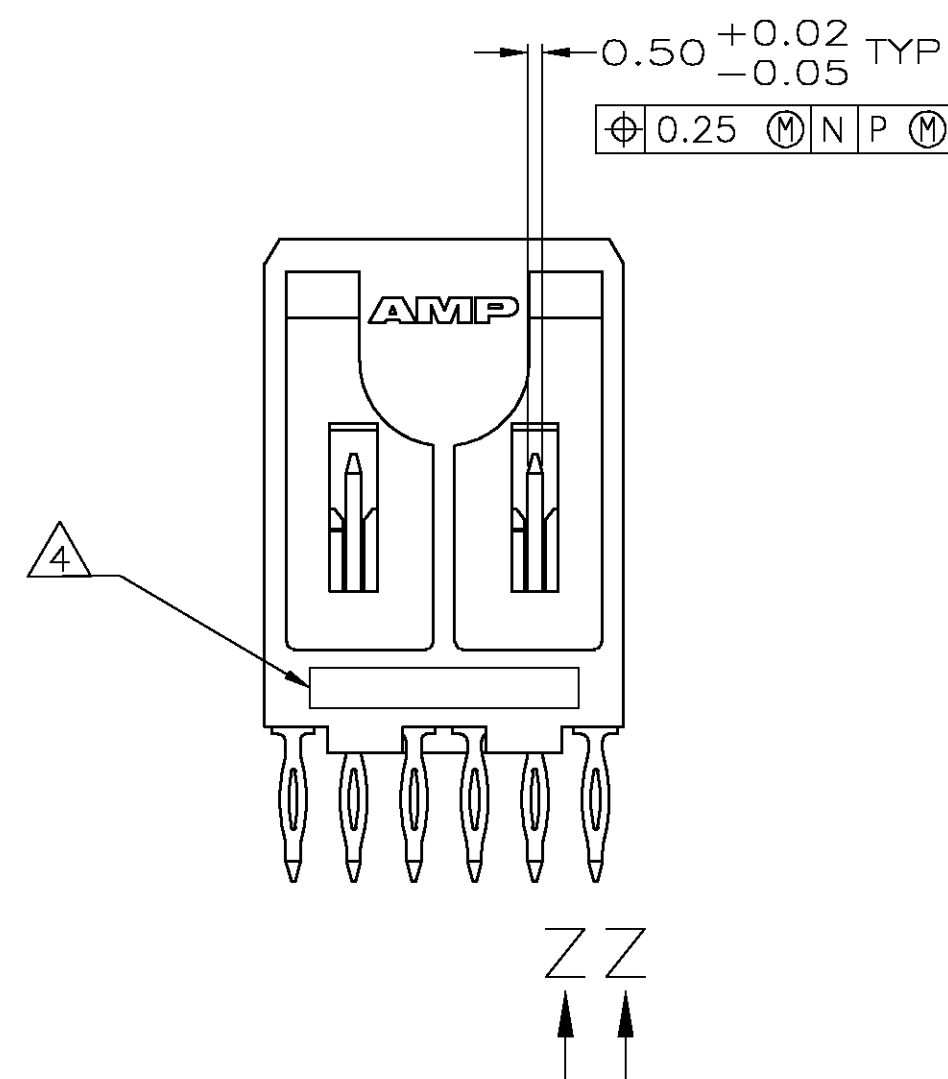
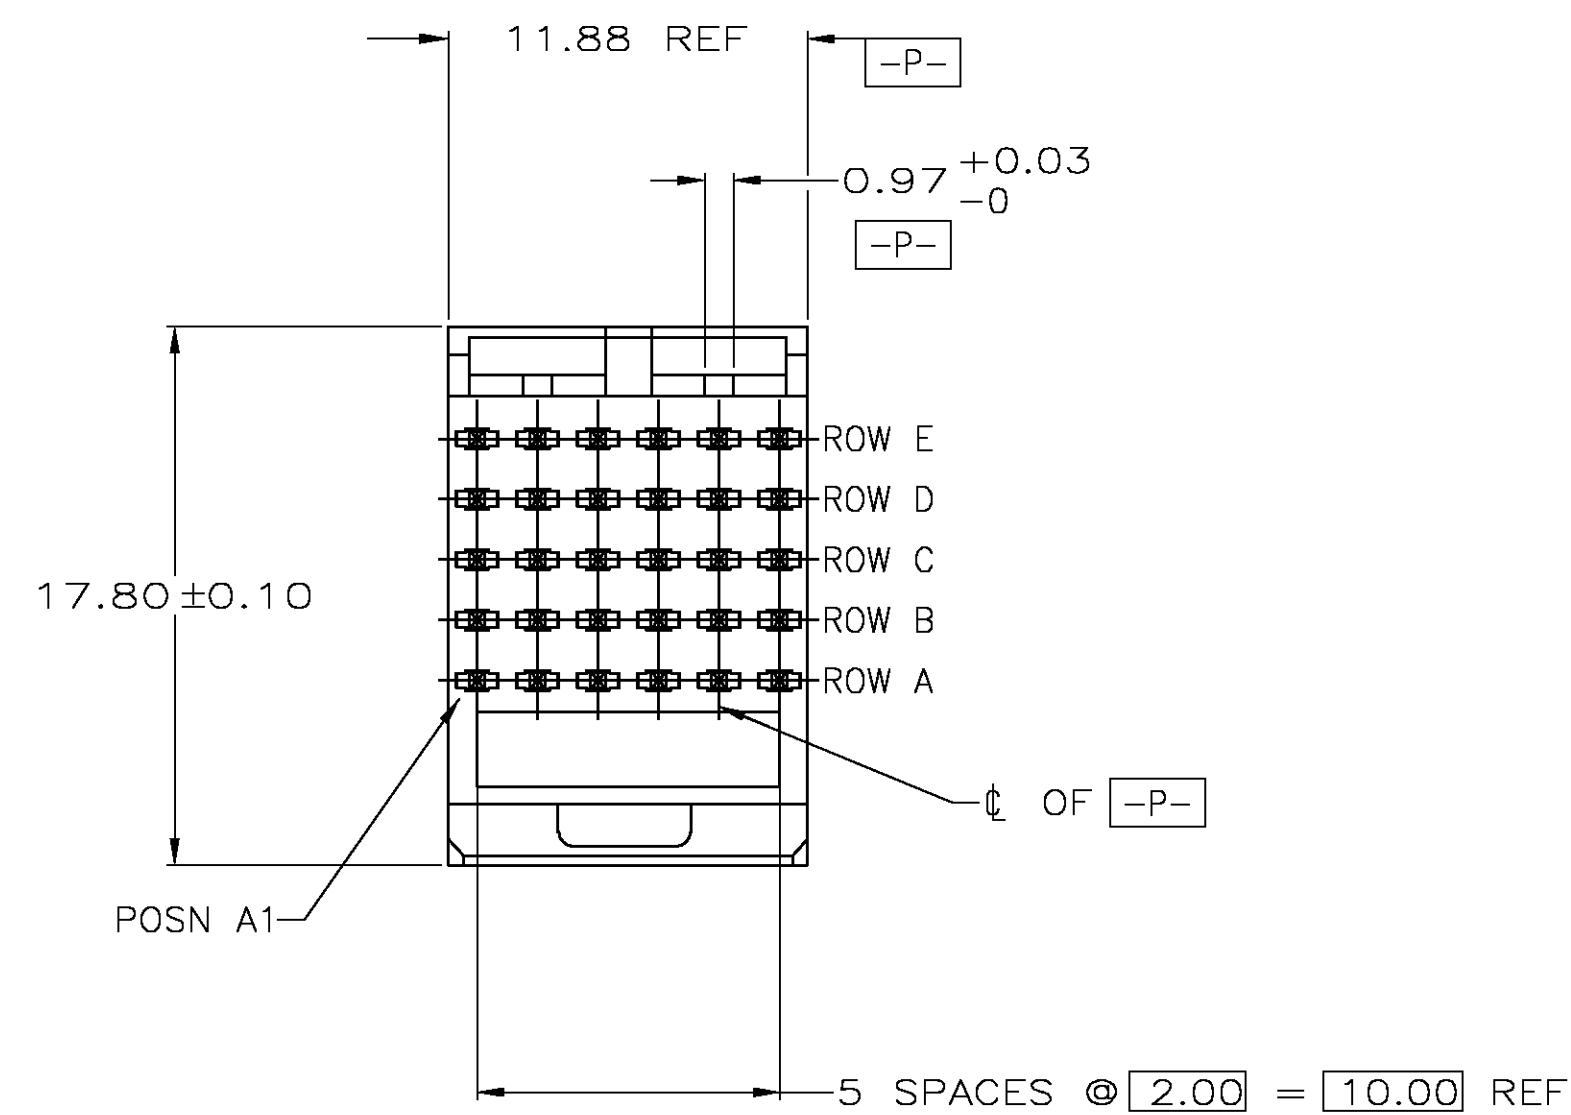


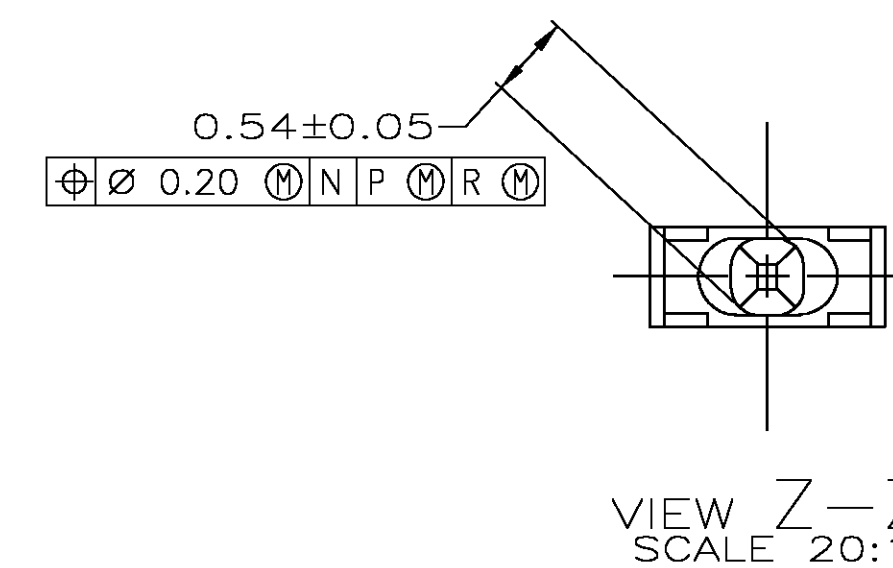


RECOMMENDED CIRCUIT PATTERN
(COMPONENT SIDE)

E	A	T	J	J	J	J	E
D	J	T	J	J	J	J	D
C	J	T	J	J	J	J	C
B	T	T	J	J	J	J	B
A	T	T	J	J	J	J	A
	1	2	3	4	5	6	
			CONTACT LOAD CHART				

- △ HOUSING MATERIAL: LIQUID CRYSTAL POLYMER. COLOR: NATURAL.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE.
- △ CONTACT FINISH:(B)
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL PER SAE—AMS—QQ—N—290
ON MATING SURFACES:
CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA
UNCONTROLLED ENVIRONMENT.
ON LEADS:
0.0006 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
LUBRICATION (MIN MATING SURFACES):
SURFACE CONDITIONER AFTER PLATING.
- △ PART MARKING LOCATED APPROXIMATELY AS SHOWN.
- △ DIMENSION APPLIES WHEN SEATED ON PRINTED CIRCUIT BOARD.

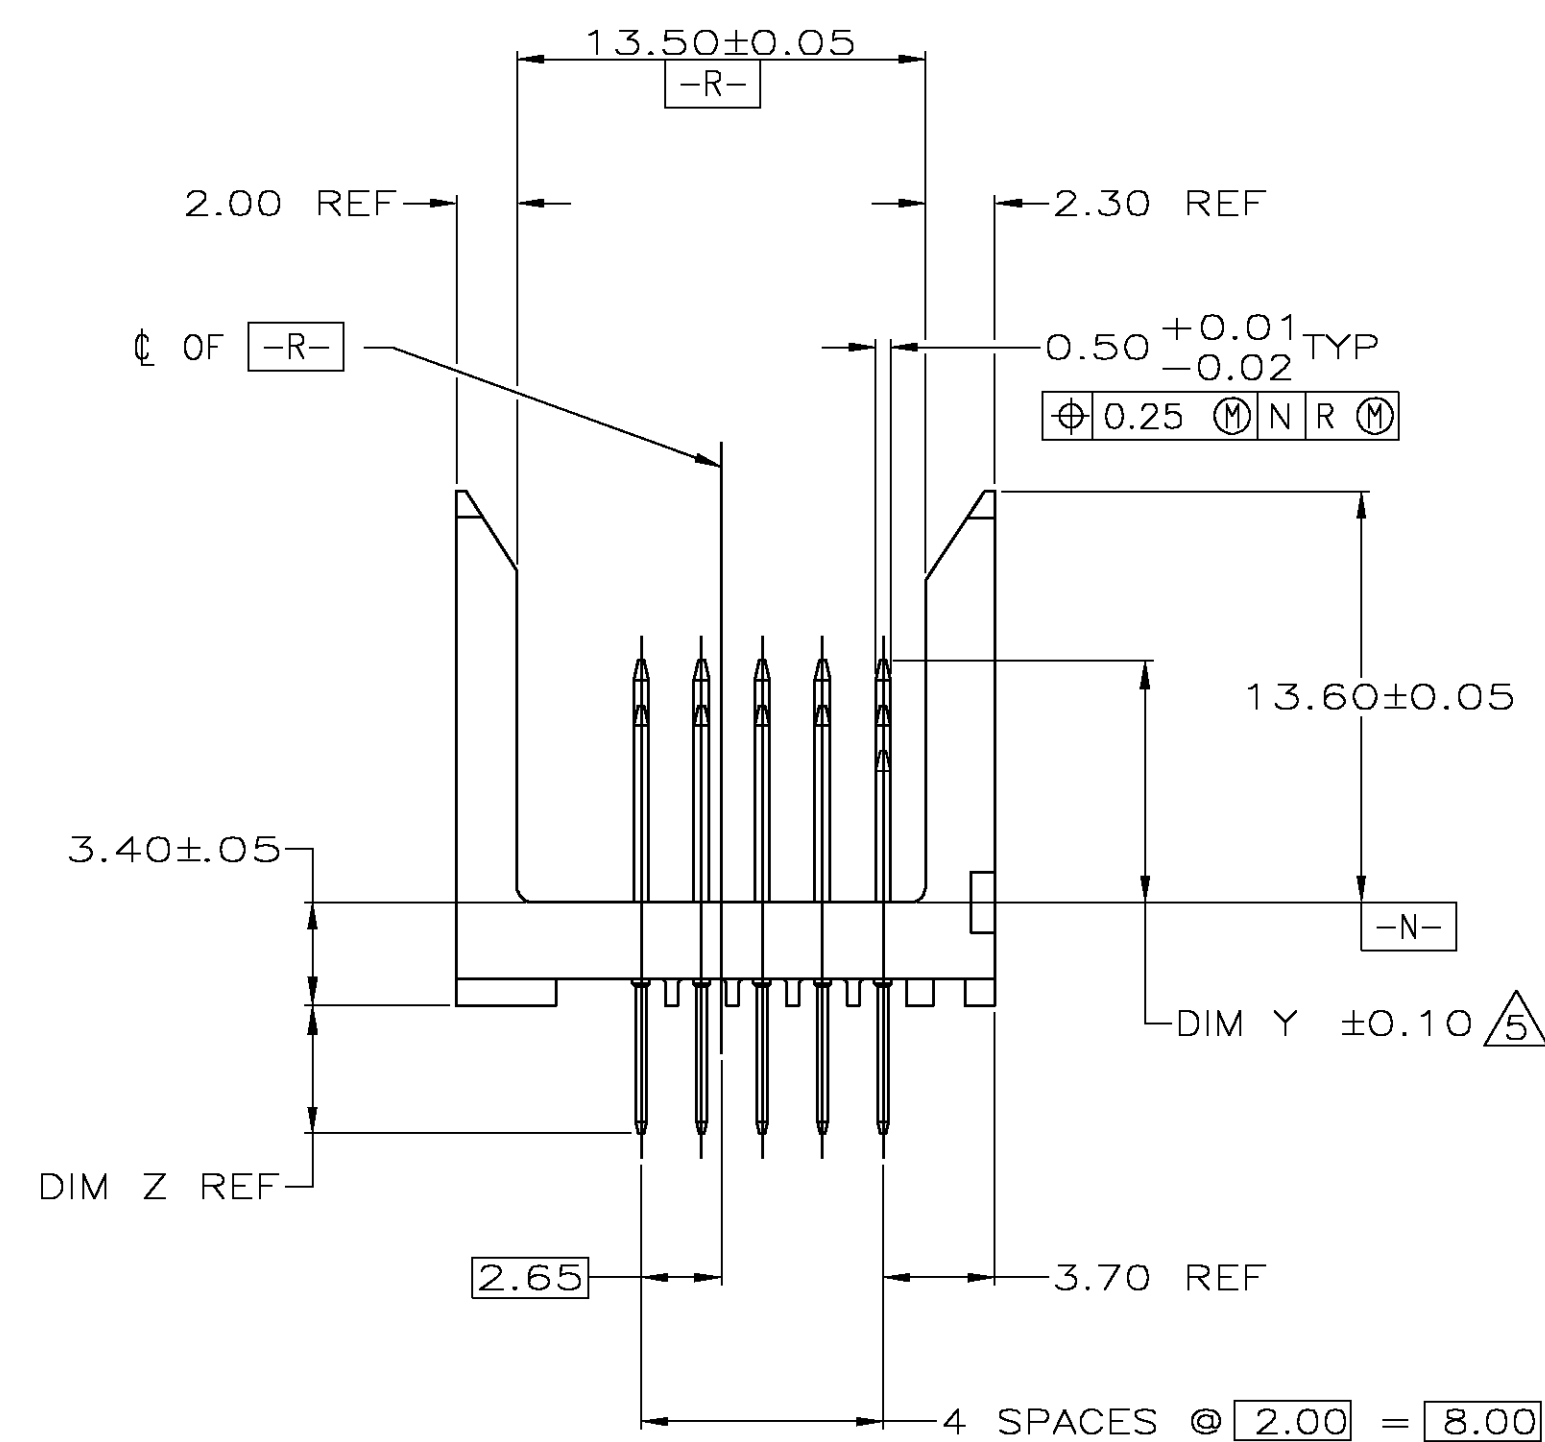

	5223061-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN B. MCMASTER 130EC04		 Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS:		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME	
mm		R. WERTZ 130EC04		APVD R. WERTZ PRODUCT SPEC	
				PIN ASSEMBLY, Z-PACK 2mm FB, SIGNAL, VERTICAL, 5 ROW, 30 POSITION, SEQUENCED, WITH PRESS FIT LEADS	
MATERIAL		FINISH		SIZE CAGE CODE DRAWING NO	
				A1 00779 C=5223061	
		WEIGHT —		RESTRICTED TO —	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV 0	