

LOC		DIST		REVISIONS							
CM		00		P	LTR	DESCRIPTION			DATE	DWN	APVD
					B	REV PER ECR 10-018921			15SEP10	JR	TM

1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.

CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.





3. DIMENSIONS IN BRACKETS ARE IN INCHES.

4. FLAMMABILITY V-2 FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-11-10.


5. GLOW-WIRE FLAMMABILITY (GWFI) 800°C FOR THICKNESS 0.38mm AND 0.75mm PER IEC 60695-2-12.

6. GLOW-WIRE FLAMMABILITY (GWFI) 960°C FOR THICKNESS 1.5mm AND 3.0mm PER IEC 60695-2-12.


7. GLOW-WIRE IGNITION (GWIT) 825°C FOR THICKNESS 0.38mm 0.75mm, 1.5mm, AND 3.0mm PER IEC 60695-2-13.

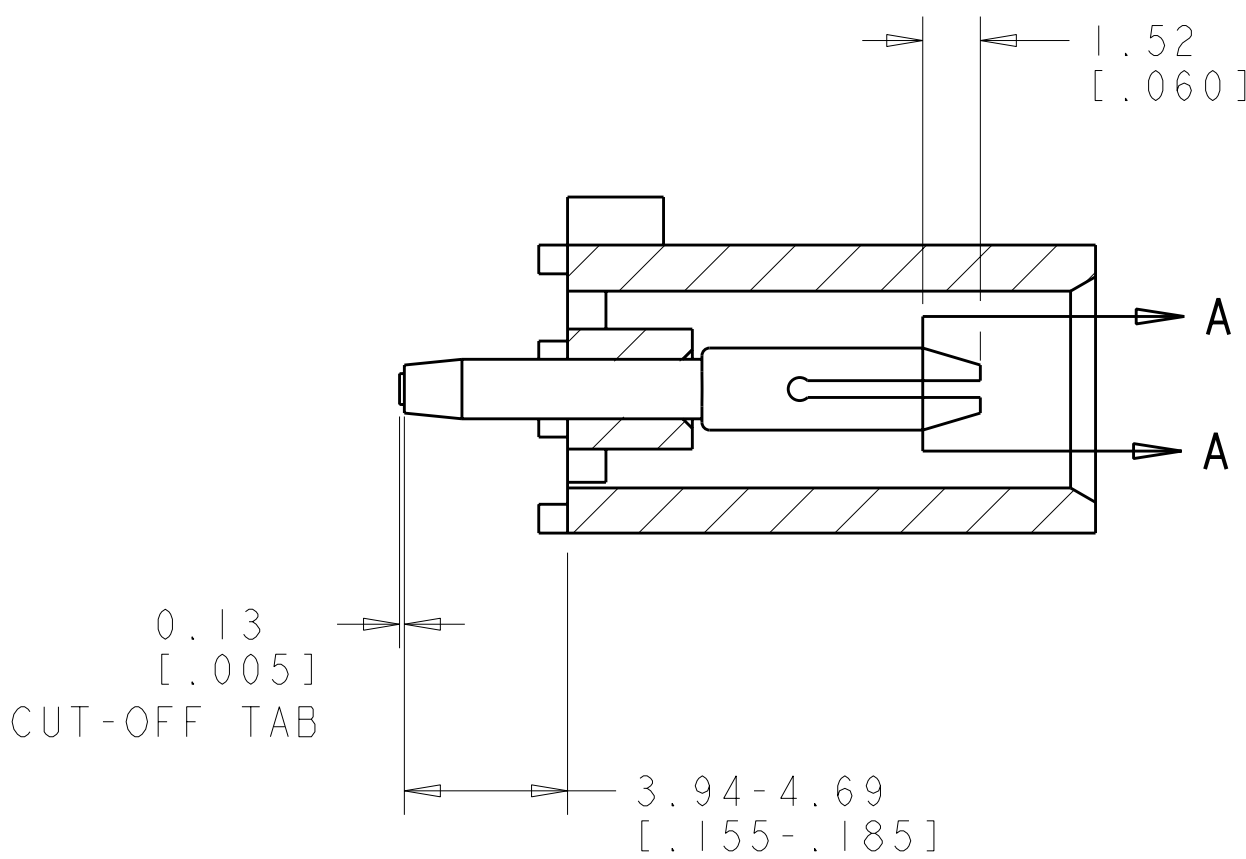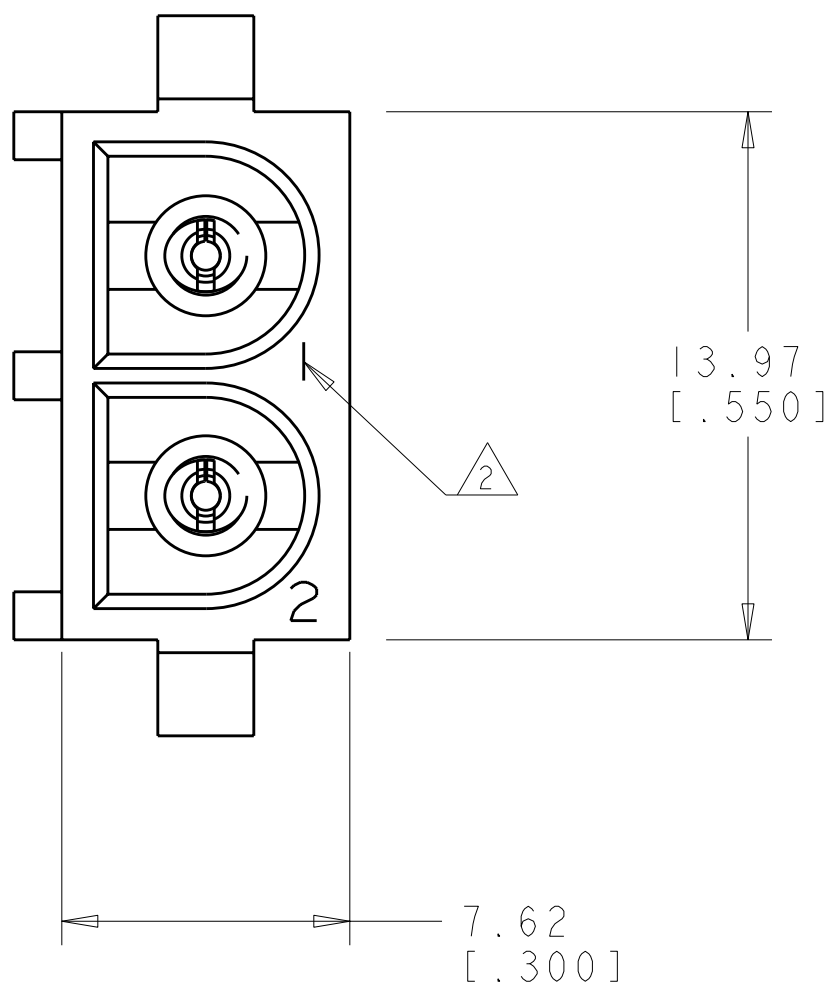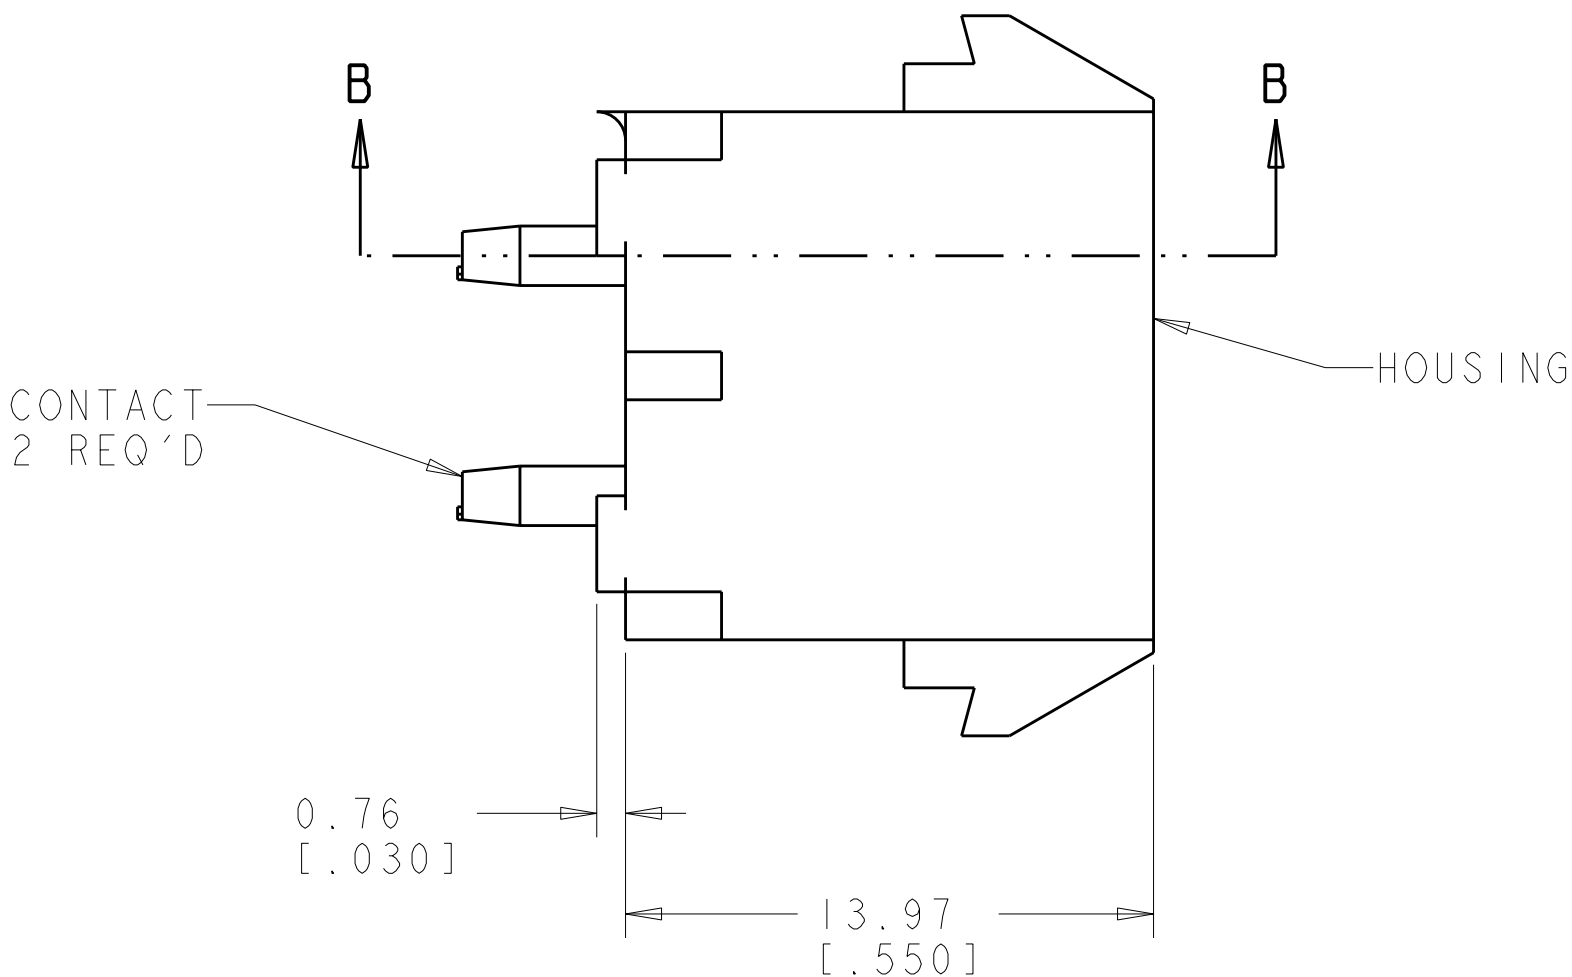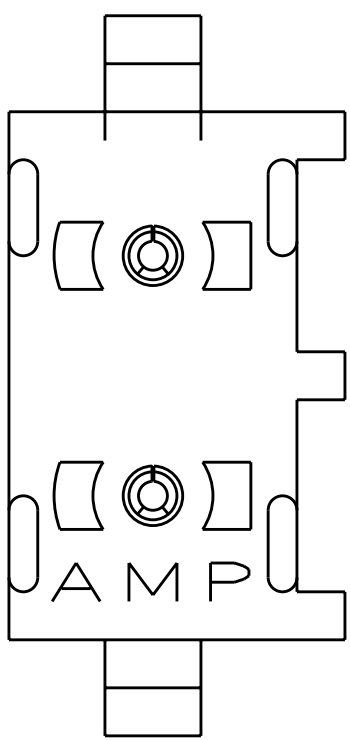


SECTION B-B

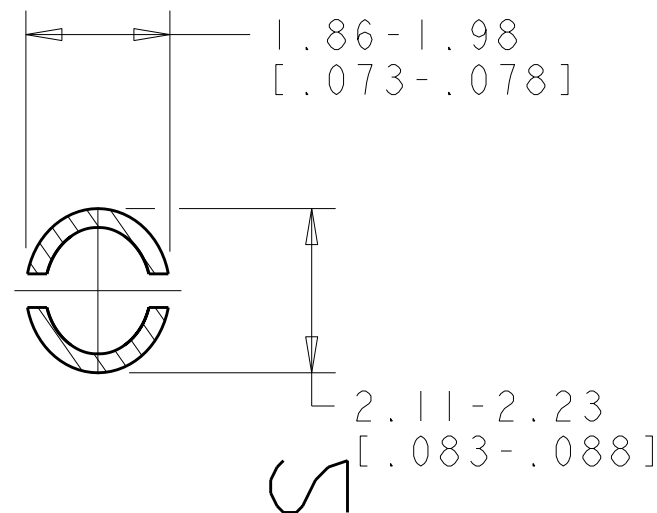

SECTION A-A
SCALE 10:1

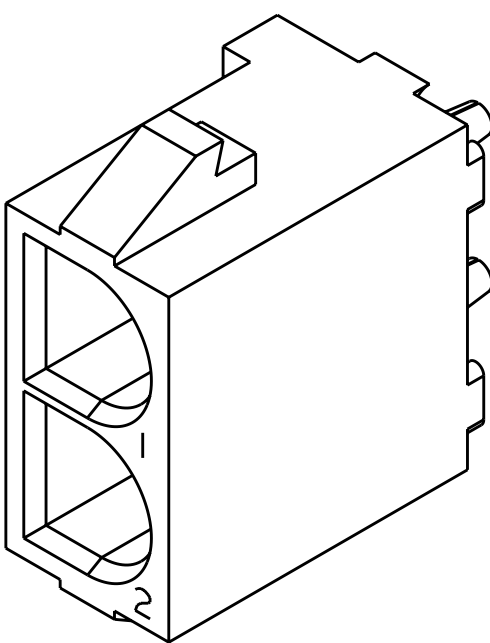

3 DIMENSIONAL VIEW
SCALE 4:1

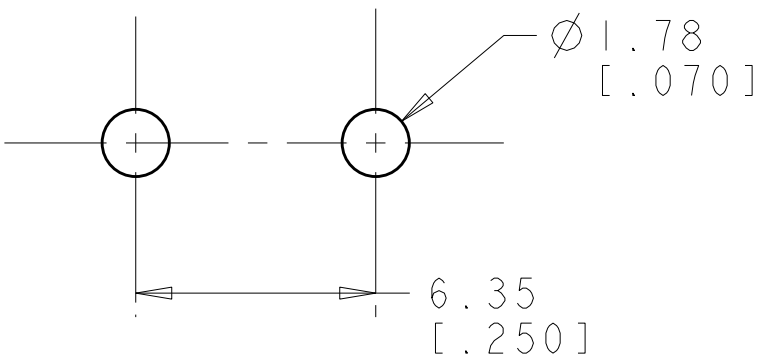

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [.062] THICK P.C. BOARD

PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-2, NATURAL	1586953-1
PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL AND COLOR	PART NUMBER

DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN R. WHITAKER 25JUL2007		Tyco Electronics Harrisburg, PA 17105-3608	
9 PLC ±		0.13(.005)		CHK D. COLEY 25JUL2007		NAME	
2 PLC ±		±		APVD D. COLEY 25JUL2007		PRODUCT SPEC	
3 PLC ±		±				APPLICATION SPEC	
4 PLC ±		±				SIZE	
ANGLES		±0°30'				CAGE CODE	
FINISH		SEE TABLE				DRAWING NO	
MATERIAL		SEE TABLE				RESTRICTED TO	
CUSTOMER DRAWING						REV	

