## **SPECIFICATION**

**Material:** Boot: APM RUBRGLAS  $^{\intercal}$ M (transparent silicone rubber), conforms to A-A-59588, Class III Grade 50, Frame: steel, zinc plated with chromate finish. Screw: SEELSKREW ® (self-sealing screws),

stainless steel with silicone rubber O-ring.

Temperature Range: HEXSEAL: -94°F to +400°F Pressure Range: Dust tight and splashproof.

Operational Life: 10,000 actuations (minimum).

**Shelf Life:** Excess of 25 years.

Resistant to: Salt spray, sunlight, ozone, weather, corona and most

acids.


Notes:

- 1. Mounting screws are supplied in lengths shown unless otherwise specified.
- 2. New sizes and types of RUBRGLAS-SEELS ® are being added regularly. Please request other types and styles as required.

**Agency Recognition:** Front Panel mounted Circuit Breaker Boots are UL- listed to UL Std. 50, types 1,2,3,12,12K and 13.

Back-of-Panel mounted Circuit Breaker boots are UL-listed to UL

Std. 50, type 1, Also meet CSA standards.

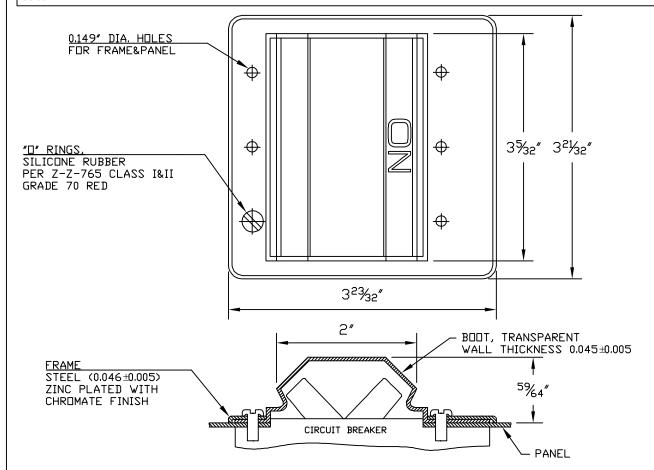

## NOTES:

ASSEMBLY CONSISTS OF 1 BOOT, MAT'L APM RUBRGLAS ®, 1 FRAME MAT'L C.R.S. ZINC PLATED WITH CHROMATE FINISH, &6#6-32 APM SEELSKREWS ® LENGTH =3/8 UNLESS OTHERWISE SPECIFIED

TOLERANCES: UNLESS OTHERWISE NOTED +1/32

J	RUBBER and FRAME MAT'L CHANGED, WALL THICKNESS TOL. 0.010 CHANGED TO 0.005, HEIGHT DIM. 26/64" CHANGED TO 59/64", DELETED TO "DESIGN TO MEET MIL-5423/14-03" and DELETED TO SEELSKREW INFORMATION			05.05.09
	CAD COMPUTER GENERATED			11.13.02
Н	REDRAWN	EDRAWN		
REV.		DESCRIPTION		
MAXIMUM	AND MINIMUM MEASURE- LE STATED DIRECTLY ON ENSION.	ப் CIRCUIT BREAKER BOOT, ENG.	M.M.	
EACH DIMI	ENSION.	☐ TOGGLE, WIDE ANGLE, DWN.	J.P.	07.02.59
	IBRGLASS ①	☐ TRANSPARENT (3 POLES) CHKD.		
CONFORMS TO A-A-59588 CL III		SCALE 9	HE-1070	
FINISH: GRADE 50		APM_HEXSEAL CORPORATION		
TRANSPARENT		3/4:1   §		

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

APM HEXSEAL: