

VINETIC-4C/S

Enhanced Next Generation
Analog Telephony Solutions
PEF 3304/3394



VINETIC-4C and VINETIC-4S are Infineon's optimized Central Office (CO) solutions for centralized VoIP applications or pure TDM based access network applications.

Infineon's VINETIC family of analog voice access ICs includes two, four and eight-channel codecs that are optimized for Customer Premises Equipment (CPE) as well as CO access network applications. Featuring four levels of integrated DSP performance, the VINETIC family offers system providers a wide range of flexible solutions from pure TDM functionality, up to full blown VoIP or VoATM packet and voice processing engines.

With this comprehensive set of specially designed packet based voice transmission features, the VINETIC family provides the DSP power required for each specific application. Together with Infineon's extended family of SLIC devices, each system can be tailored with an optimum combination of devices.

The VINETIC-4C and VINETIC-4S ICs are pin-compatible with Infineon's VoIP solutions, VINETIC-M and VINETIC-VIP, that combine voice codec with feature-rich DSP capabilities.

Applications

- Central Office (CO)
- Access Network
- DLC, DSLAMs
- WLL, FTTH
- PBX

Voice over Packet Features

- Integrated Voice Compression supports G.726 ADPCM (16, 24, 32, 40 kbit/s) and G.711
- Line Echo Cancellation (LEC) up to a 16 ms tail, and exceeds G.165/G.168/G.168-2000/G.168-2002
- DSP power according to system port density
- Encapsulated Voice Processing takes care of all real-time-critical tasks within VINETIC

- Advanced Integrated Test and Diagnostic Functions (AITDF) support Line Testing and Quality of Service (QoS)

Codec/SLIC Features

- Fully programmable 4-channel CODEC with voice processing DSP
- Complete VINETIC family HW and SW compatible
- Specification according to ITU-T Q.552, G.712, LSSGR
- Uses Infineon's well-known SLIC family (170V)
- AC and DC characteristic country independent programmable
- Enhanced Power Management
- Integrated DTMF Decoder
- Integrated Caller-ID Generator and Detector (FSK and DTMF)
- Internal programmable balanced ringing up to 85 V_{RMS} and 50 V_{RMS} unbalanced ringing
- Support of external ringing
- Metering pulse up to 2.5 V_{RMS} at 200 Ω (12/16 kHz)

Documentation and Development Tools

- Evaluation board EASY334 + VINETIC Tool CD-ROM
- Coefficient Calculation Software (VINETICOS)
- VINETIC Driver in Linux and VxWorks
- Data sheets, System and Software User's Guides, Driver Documentation and Application Notes

www.infineon.com/vinetic

COMMUNICATION



Never stop thinking


VINETIC Family – Overview

Chip Set ¹⁾	VINETIC-4S	VINETIC-4C
Analog Channels	4	4
Supported SLICs	SLIC-P (PEB 4266), SLIC-E (PEB 4265), SLIC-E2 (PEB 4265-2), SLIC-S (PEB 4264), SLIC-S2 (PEB 4264-2), TSLIC-E (PEB 4365), TSLIC-S (PEB 4364), SLIC-LCP (PEB 4262), SLIC-DC (PEF 4268)	
DTMF Decoder	No	Yes
Tone/DTMF Generator	Yes	Yes
Tone Detection	No	Yes
Line Echo Cancellation	No	Up to 16ms
Caller ID	No	Yes
Voice Compression (G.711, G.726)	Yes/No	Yes/Yes
Line Testing	AITDF	AITDF
Modem (V.90) Transmission	Yes	Yes
Modem Tone Detection	No	Yes
Metering Pulses (TTX)	2.5 Vrms	2.5 Vrms

1) For more members of the VINETIC family contact Infineon sales for more details on VINETIC. VINETIC devices with the same package offer pin- and SW-compatibility

Product Summary

Type	Sales Code	Description	Package
VINETIC-4C	PEF 3394 E V2.2	4-channel voice codec with integrated DSP functions	P/PG-LBGA-176-3
VINETIC-4C	PEF 3394 HL V2.2	4-channel voice codec with integrated DSP functions	PG-LQFP-176-2
VINETIC-4C	PEF 3394 EL V2.2	4-channel voice codec with integrated DSP functions	P/PG-LBGA-144-1
VINETIC-4S	PEF 3304 E V2.1	4-channel voice codec	P/PG-LBGA-176-3
VINETIC-4S	PEF 3304 HL V2.1	4-channel voice codec	PG-LQFP-176-2
VINETIC-4S	PEF 3304 EL V2.1	4-channel voice codec	P/PG-LBGA-144-1

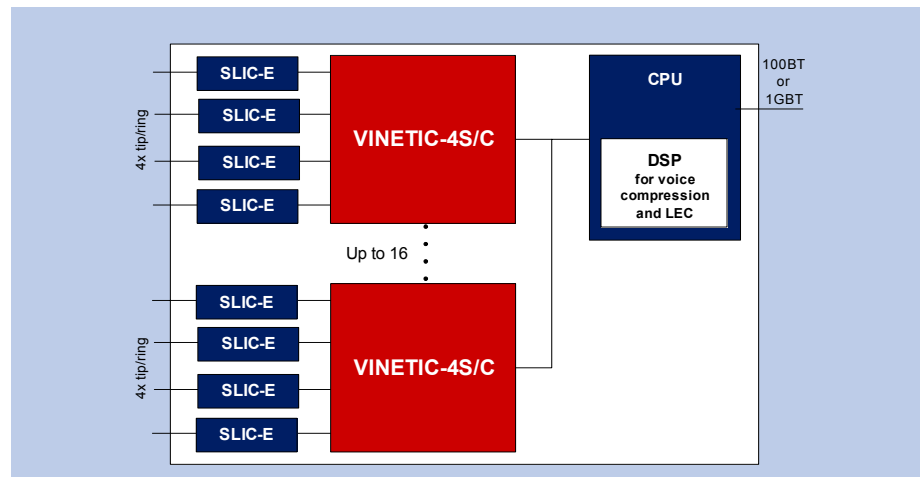

Application Example: VoIP Linecard with integrated Ringing

How to reach us:

<http://www.infineon.com>

Published by
Infineon Technologies AG
St.-Martin-Strasse 53
81669 München

© Infineon Technologies AG 2005.
All Rights Reserved.

Template: pb_w_tmplt.fm/3

Attention please!

The information herein is given to describe certain components and shall not be considered as a guarantee of characteristics. Terms of delivery and rights to technical change reserved. We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office.

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Ordering No. B000-H0000-X-X-7600
Printed in Germany
PS 10053.