


GSM15 Medical

15 Watt Global Performance Medical Switcher



FEATURES:

- Small, miniature 15 watt, single output
- Models available in 5, 12, 15, 24, 28 Vdc outputs
- Power Density of over 3 watts per cubic inch
- Small package 3.00 x 2.10 x .85 inches
- Medical approvals to UL2601-1, IEC60601-1, CSA-C22.2 No. 601-1, EN60601-1
- Exceeds FCC and CISPR11 Class B conducted emissions requirements
-  marked to LVD

SPECIFICATIONS:

Ac Input

90-264 Vac, 47-63 Hz single phase. Class 1 or class 2 grounding.

Input Current

Maximum input current at 90 Vac, 60 Hz with full rated output load not to exceed 0.6 A.

Input Protection

Internal ac fuse provided on all units. Designed to blow only if a catastrophic failure occurs in the unit -- Fuse does not blow on unsustained overload or short circuit.

Inrush Current

Inrush is limited by internal thermistors. The inrush at 240 Vac, averaged over the first ac half-cycle under cold start conditions will not exceed 37 A.

Efficiency

69-85% depending on model.

Overload Protection

Fully protected against short circuit and output overload. Short circuit protection is cycling type power limit. Factory set to begin power limiting at 23 W.

Overvoltage Protection

Built in OVP on all models. Approximately 120-140% of output voltage.

Output Noise

0.5% rms, 1% Pk-Pk, 20 MHz Bandwidth, differential mode. Measured with noise probe directly across output terminals of the power supply.

Transient Response

Main Output - 500 ms max. response time for return to within 0.5% of final value for a 50% load step change, $\Delta i/\Delta t < 0.2 \text{ A}/\mu\text{s}$. Maximum voltage deviation is 3.5%.

Temperature Coefficient

0.03% / °C typical.

EMI/EM Compliance

All models include built-in EMI filtering to meet the EMC requirements of IEC601-1-2.

Performance Requirement	EMC Standard	Typical Margin
Conducted Emissions	EN55011, Class B; FCC Class B	2 dB Class II Gnd 6 dB Class I Gnd
Static Discharge	EN61000-4-2, Level 3	2 kV
RF Field Susceptibility	EN61000-4-3, Level 3	2 V
Fast Transients/Bursts	EN61000-4-4, Level 3	500 V
Surge Susceptibility	EN61000-4-5, Level 3	500 V
Conducted RF Susceptibility	EN61000-4-6	25%
Voltage Sags & Surges	EN61000-4-11	5%

Medical Safety Approvals

All models are Certified to be in compliance with the applicable requirements of UL2601-1, IEC60601-1, CSA-C22.2 No. 601-1, EN60601-1.

Leakage Current

The maximum leakage current for GSM15 series will be as follows;

132Vac/60Hz	UL2601-1 test method
GND Connection	Normal Single Fault
Class I	75 μA 105 μA
Class II	39 μA 54 μA
264Vac/50Hz	IEC60601-1 test method
GND Connection	Normal Single Fault
Class I	128 μA 180 μA
Class II	66 μA 94 μA

GSM15 Medical 15 Watt Single Output

Medical Model	Voltage Output	Min.	Normal (A)	Peak (B)	Noise P-P	OVP Setpoint	Total Regulation	Ripple and Noise
GSM15-5	5.1 V	0 A	2.35 A	3 A	2.5%	7.2 V	2%	1%
GSM15-12	12 V	0 A	1.25 A	1.5 A	2.5%	16 V	2%	1%
GSM15-15	15 V	0 A	1.0 A	1.2 A	2.5%	21 V	2%	1%
GSM15-24	24 V	0 A	0.625 A	0.75 A	2.5%	32 V	2%	1%
GSM15-28	28 V	0 A	0.54 A	0.64 A	2.5%	280 V	2%	1%

Notes:

A. Rating with unrestricted convection cooling.

B. Peak Power for 60 sec. 10% duty cycle or continuous rating with 150 LFM of airflow.

GSM15 MECHANICAL SPECIFICATIONS:

INPUT: J1 AMP P/N 640456-4

PIN 1) AC LINE

PIN 2) N/C

PIN 3) N/C

PIN 4) AC NEUTRAL

GND: 0.098 DIA. THRU HOLE

OUTPUT: J2 AMP P/N 640456-4

PIN 1) COMMON Return

PIN 2) COMMON Return


PIN 3) OUTPUT #1 + Vout

PIN 4) OUTPUT#1 +Vout

MATING CONNECTOR AMP P/N

MTA – 100 Recepticle

NOTE: 3A MAXIMUM RECOMMENDED
CURRENT PER CONNECTOR PIN

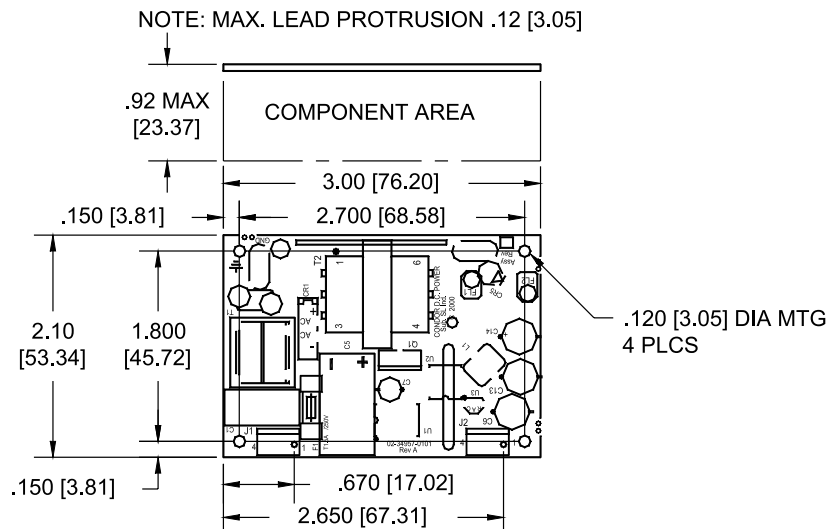

Overall Dimensions:
2.65 x 2.10 x .85 inches
67.31mm x 53.34mm x 21.59mm
Weight: 0.25 LBS. [.113 kg]
MAX.

Environmental Specification	Operating	Non-operating
Temperature (A)	0 TO 50°C	-40 to +85°C
Humidity (A)	0 to 95% RH	0 to 95% RH
Shock (B)	20 g _{pk}	40 g _{pk}
Altitude	-500 to 10,000 ft	-500 to 40,000 ft
Vibration (C)	1.5 g _{rms} * 0.003 g ² /Hz	5 g _{rms} * 0.026 g ² /Hz

- A. Units should be allowed to warm up/operate under non-condensing conditions before application of power.
B. Random vibration—10 to 2000Hz, 6dB/octave roll-off from 350 to 2000Hz, 3 orthogonal axes. Tested for 10 min./axis operating and 1 hr./axis non-operating.
C. Shock testing—half-sinusoidal, 10 ± 3 ms duration, ± direction, 3 orthogonal axes, total 6 shocks.



Condor D.C. Power Supplies, Inc., 2311 Statham Parkway, Oxnard, CA 93033
800-235-5929 • 805-486-4565 • FAX 805-487-8911 • www.condorpower.com