

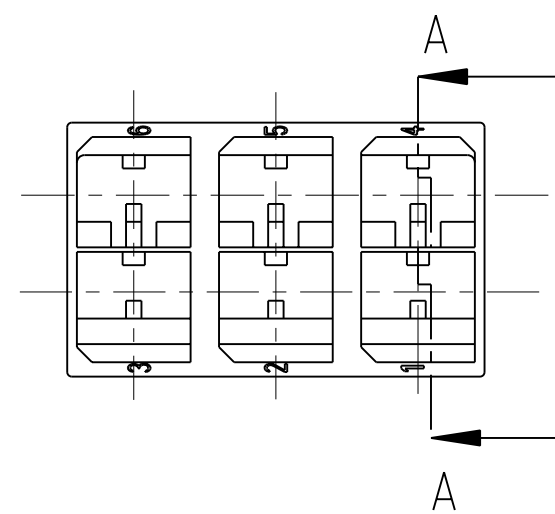
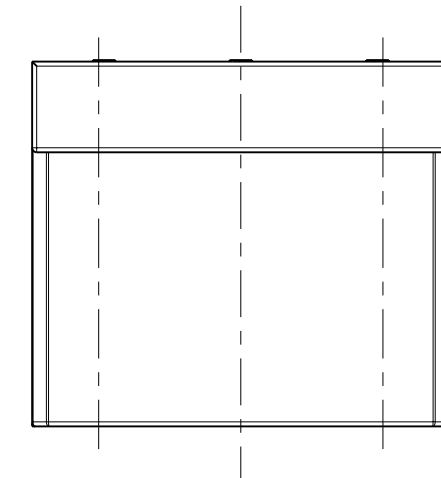
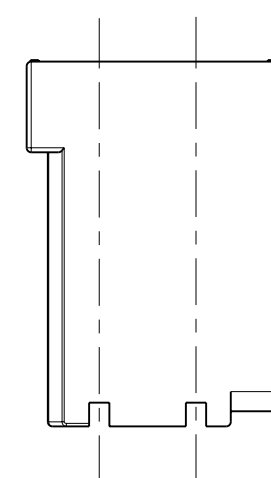


LOC	DIST	REVISIONS					
AI	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			F3	REVISED PER ECO-11-005140	16APR2011	RK	HMR

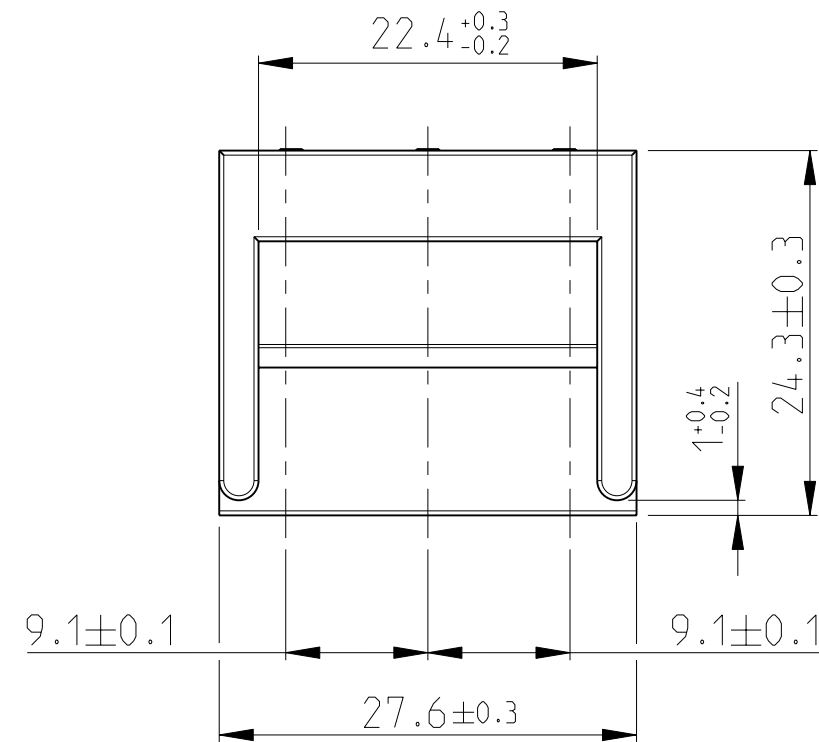

3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

1:1



	weiß/ WHITE RAL 9001	PA 6.6	926330-8
3	OBSOLETE	blau/ BLUE RAL 5012	926330-7
	gelb/ YELLOW RAL 1018	PA 6.6	926330-6
3	OBSOLETE	grün/ GREEN RAL 6011	926330-5
	rot/ RED RAL 3000	PA 6.6	926330-4
	natur/ NARURAL	PA 6.6	926330-3
3	OBSOLETE	grau/ GREY RAL 7037	926330-2
	schwarz/ BLACK	PA 6.6	926330-1
	COLOR	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 17SEP2008 Raab, S.		 TE Connectivity	
		CHK 22SEP2008 Goeppel, C.			
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.2 $\pm 1.5^\circ$		NAME 6-poliges POSITIVE LOCK Gehaeuse der Serie 6,3 (.250)	
		APVD 23SEP2008 Bleicher, M. PRODUCT SPEC - APPLICATION SPEC -			
MATERIAL		FINISH		SIZE CAGE CODE DRAWING NO A2 00779 C=926330	
		WEIGHT 3.7 g		RESTRICTED TO	
		CUSTOMER DRAWING		SCALE 2:1 SHEET 1 OF 1 REV F3	