

# SERIES 19X MAXI® CIRCUIT BREAKERS



**Series 19X MAXI® Circuit Breakers**  
Auto, Manual & Modified Reset

## SPECIFICATIONS

### Single Pole Thermal Type Breakers

**Rating:** 8-50A; 14VDC; 28VDC (Series 193, 194, & 195).

**Interrupt Rating:** 150A @ 14VDC (8-10A versions); 225A @ 14VDC (15A version); 300A @ 14VDC (20A version); 450A @ 14VDC (25-30A versions); 600A @ 4VDC (35-40A versions); 750A @ 14VDC (50A version).

**Operating Temperature Rating:** -40°F (-40°C) to 185°F (85°C).


**Storage Temperature Rating:** -40°F (-40°C) to 260°F (125°C).

**Materials:** Grey UL-Rated 94V-0 thermoplastic.


**Termination:** Compatible with fuse blocks accepting MAXI® or ATC® blade fuses.

**Compliances:** SAE J553.


10 AMPS & BELOW  
TYPICAL CURVE
 
 15 AMPS & ABOVE  
TYPICAL CURVE

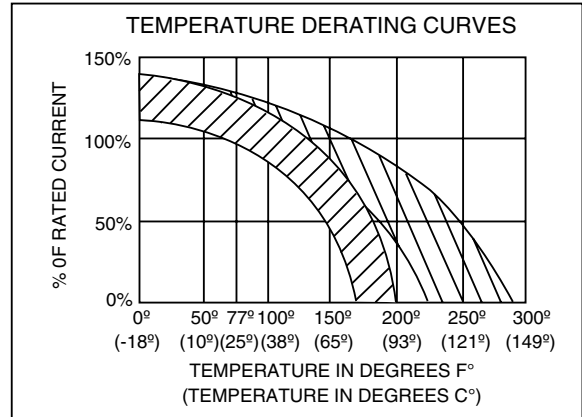

10 AMPS & BELOW  
TYPICAL CURVE
 
 15 AMPS & ABOVE  
TYPICAL CURVE

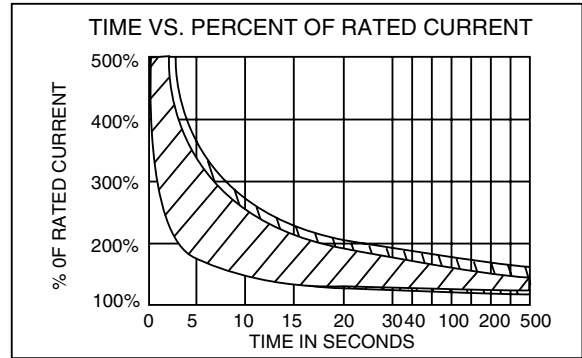

## DIMENSIONS (Dims. shown are for reference only. Consult factory for latest prints) TERMINAL OPTIONS

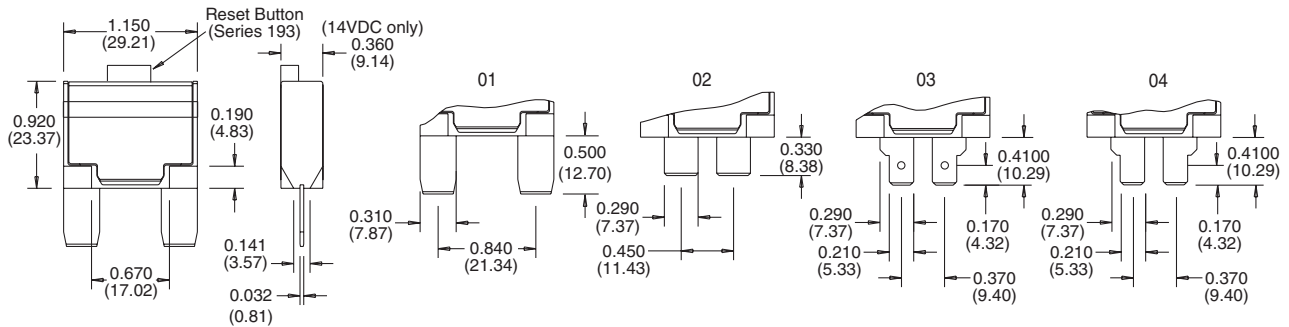

## PART NUMBERING SYSTEM

Series	Rating	Terminal	Cover	Button (193 Series Only)	Marking
191 - Type I, 14 VDC	08 - 8 amps	01 - MAXI®	M - Metal*	1 - Black	(Consult factory for special markings.)
192 - Type II, 14 VDC	10 - 10 amps	02 - Wide ATC®	P - Plastic (193 only)	2 - White	
193 - Type III, 12V/28 VDC	15 - 15 amps	03 - Long ATC®			
194 - Type I, 28 VDC	20 - 20 amps	(w/dimple)			
195 - Type II, 28 VDC	25 - 25 amps	04 - Long ATC®			
	30 - 30 amps	(no dimple)			
	35 - 35 amps				
	40 - 40 amps				
	50 - 50 amps (191, 193, 194 only)				

\* All breakers have metal cover except 193 series.