

S Series

Slide Switches



Agency Approvals

Agency	Agency File Number
	E42363

Specifications

Contact Rating	Q contact material (S1XX, S2XX models): 6 amps @ 125 V AC; 6 amps @ 250 V AC; 1 amp @ 125 V DC . (S5XX, S6XX models): 12 amps @ 125 V AC; 6 amps @ 250 V AC; 1 amp @ 125 V DC . (S7XX, S8XX models): 15 amps @ 125 V AC; 6 amps @ 250 V AC .
Electrical Life	10,000 make-and-break cycles at full load.
Contact Resistance	Below 10 m Ω typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts.
Insulation Resistance	10 ⁹ Ω min.
Dielectric Strength	1,000 Vrms min. @ sea level.
Operating Temperature	-30°C to 65°C
Storage Temperature	-30°C to 85°C

Description

Designers of portable tools, small appliances and floor care products turn to the S series switch when they need a resilient, long-lasting switch that can withstand harsh environments. The S series switch comes with enclosed housing, optional reversing option, PC or snap-in panel mounting and a range of 6 to 15 amps.

Features & Benefits

- 6 to 15 AMPS
- Enclosed housing
- PC and Snap-in panel mounting
- Reversing option
- RoHS compliant

Applications

- Portable tools
- Small appliances
- Floor care products

Materials

Housing & Top Plate	6/6 nylon (UL 94 V-2), black.
Actuator	6/6 nylon (UL 94 V-2), black (standard).
Contacts	Q contact material: Copper, silver plated.
Terminals	
Contact Spring	Music wire or stainless steel.
Terminal Seal	Epoxy.

Notes:

Any models supplied with Q, B or G contact material are RoHS compliant. Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

S Series

Slide Switches



Ordering Number

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.

Sx - x - x - x - x - x - x - x

Switch Function
S101: SPST, 6 amps
S202: (DPDT, 6 amps)
S802: DPDT, 15 amps
S102: SPDT, 6 amps
S112: SPDT, mom., 6 amps
S201: DPST, 6 amps
S602: DPDT, 12 amps
S701: SPST, 15 amps
S702: SPDT, 15 amps

Actuator
03: 0.335" high
04: 0.500" high
09: 0.250" high
12: Screwdriver slot (with marking)
13: Screwdriver slot (without marking)
C2: Black cap
C3: Red cap
C5: Yellow cap

Detent
1: With detent
2: Without detent

Mounting Style
SS: Panel with mounting ears
MS: PC thru-hole
S2: Snap-in panel with blacktop plate
TS: Panel with mounting ears

Seal
None: No seal
E: Epoxy seal

Contact Material
B: Gold
Q: Silver
G: Gold over silver


Housing Markings
NONE: No markings
D: ON-OFF
L: ON
M: ON-OFF
N: Red rectangle on one end

Terminations
03: Solder lug with hole
02: PC Thru-hole
04: PC Thru-hole
07: Quick connect
08: PC Thru-hole
WC: Wire lead


Switch Function

No. Poles	Model No.	AMP Rating	Switch Function	Schematic	Available Mounting Styles
SP	S101	6	SPST		SS
	S102		SPDT		MS, SS
	S112		SPDT-MOM.		
SP	S701	15	SPST		S1, S2, S3, ST
	S702		SPDT		

No. Poles	Model No.	AMP Rating	Switch Function	Schematic	Available Mounting Styles
DP	S201	6	DPST		MS, SS, TS
	S202		DPDT		
	S602	12			
DP	S802	15	DPDT		S1, S2, S3, ST

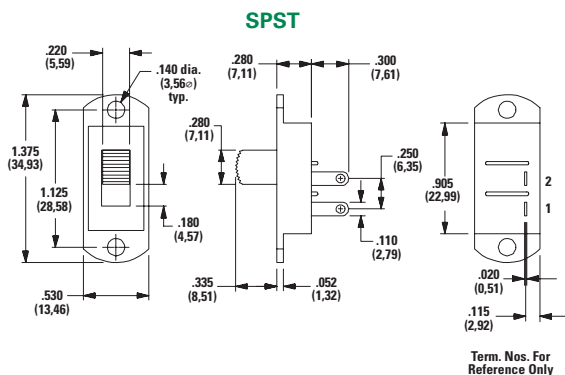

Notes:
 and MOM. in table indicates momentary action.
 All models cus with all options when ordered with "G" or "Q" contact material.
 Contacts make on side actuator thrown.

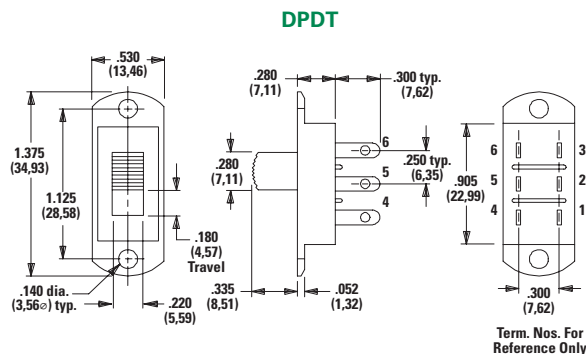


S Series

Slide Switches




Actuator


03 0.335" High




04 0.500" High



09 0.250" High




12 Screwdriver Slot (with marking)



White 115-230 markings (std.).


13 Screwdriver Slot (without marking)



Without markings.

Notes:

Standard actuator color is black, other colors available, consult Customer Service Center. Alternate heights are available with '03, 04 and 09' actuators, consult Customer Service Center. Models with S2 mounting style, subtract 0.090 (2.29). Actuators '12' and '13' are available with DPST and DPDT models only.



Note: Available with S2 mounting style only.

C2; C3; C5 Snap-On Cap

Option Code 2	C1-CT Cap Colors
C2	Black
C3	Red
C5	Yellow

Notes: Actuator finish: matte. If no color is specified, black will be supplied. Colored actuator caps may also be ordered separately and user installed, see page 5.

Detent

1 With Detent

Standard with all maintained models: S101, S102, S201, S202, S602, S701, S702, and S802.

2 Without Detent

Standard with all momentary models: S112.


S Series

Slide Switches




Mounting Styles

SS Panel with Mounting Ears S202031SS03Q DPDT

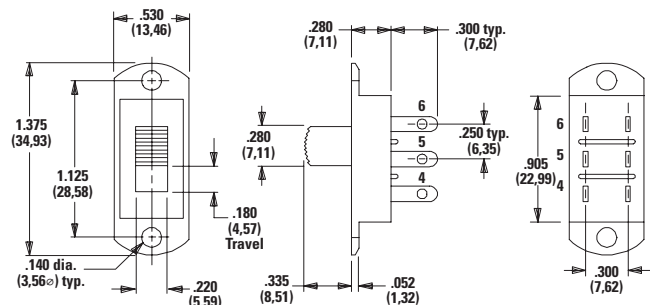


Panel Mounting




Available with:
Models: S101, S102, S112, S201, S202 and S602
Terminations: All except 08
Actuators: 03, 04, 09, 12¹ and 13¹. ¹12 and 13 actuators not available with S1XX models.

MS PC Thru-hole S202031MS02Q DPDT

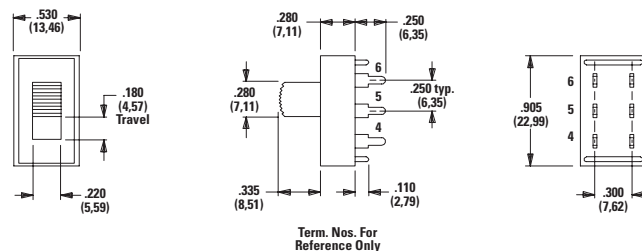


Available with:
Models: S101, S102, S112, S201, S202, S602
Terminations: 02, 04 and 08
Actuators: 03, 04, 09, 12¹ and 13¹. ¹12 and 13 actuators available with S201, S202 and S602 models only.
PC Mounting: For mounting information, see TERMINATIONS section.

S2 Snap-in Panel S802C21S207Q DPDT

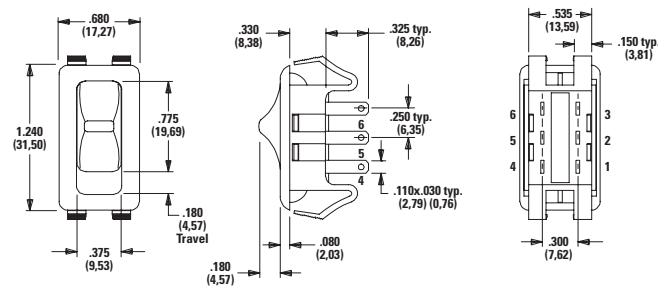

Panel Mounting



Available With:
Models: S701, S702, and S802
Terminations: 04, 07, 57 and WC
Actuators: C2, C3, C5 and 03


Panel Thickness:
.020(0,57) - .200(5,08)

S Series


Slide Switches



TS Panel with Mounting Ears S202031TS03Q DPDT

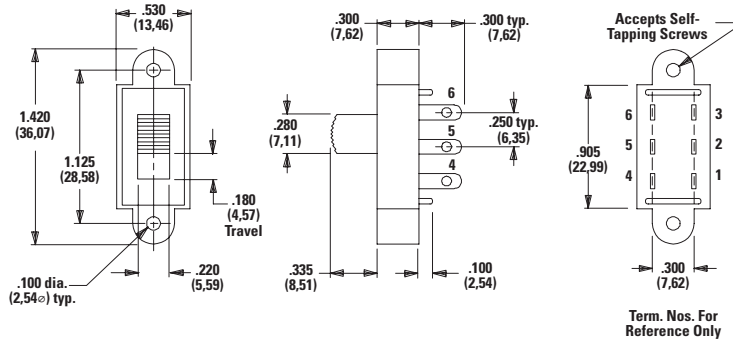


Panel Mounting




Available with:
Models: S201, S202, and S602
Terminations: All
Actuators: 03, 04 and 12.

Terminations

03 Solder Lug with Hole




02 PC Thru-hole




Recommended with "MS" mounting style only.

04 PC Thru-hole




Recommended with double pole models only.


PC Mounting 02 & 04 Terminations



07 Quick Connect




08 PC Thru-hole




MS mounting style only.

WC Wire Lead



18 AWG wire for S1XX and S2XX models. 16 AWG wire for all other models. Black wire standard, other colors and lengths available, consult Customer Service Center. UL style 1015.


PC Mounting 08 Terminations with MS Mounting Style




Notes: All terminals on S1XX, S2XX and S6XX models are 0.020 (0.51) thick; all terminals on S7XX and S8XX models are 0.031 (0.79) thick.

Top Plate Markings


None No Markings




D On-Off




L On



M On-Off



N Red Rectangle on One End



Notes: Top plate markings are available with "S2" mounting style only. The marking color on all top plates with marking options "D, L and M" is white, standard. (except white top plates: marking color is black, standard). The marking color on all top plates with "N" marking option is red, standard. Other marking colors are available, consult Customer Service Center.

Note: Orientation of actuator markings and terminals.

S Series

Slide Switches



Contact Material

Option Code	Contact Material	Ratings	
B	Gold ¹	Low Level / Dry Circuit	0.4 VA max. @ 20 V AC or DC max.
Q	Silver ²	Power	S1XX, S2XX models: 6 amps @ 125 V AC; 6 amps @ 250 V AC; 1 amp @ 125 V DC  S6XX models: 12 amps @ 125 V AC; 6 amps @ 250 V AC; 1 amp @ 125 V DC  S7XX, S8XX models: 15 amps @ 125 V AC; 6 amps @ 250 V AC 
G	Gold over Silver ³	Low Level / Dry Level Circuit or Power	S1XX, S2XX models: 0.4 VA max. @ 20 V AC or DC max. or 6 amps @ 125 V AC; 6 amps @ 250 V AC; 1 amp @ 125 V DC  S6XX models: 0.4 VA max. @ 20 V AC or DC max. or 12 amps @ 125 V AC; 6 amps @ 250 V AC; 1 amp @ 125 V DC  S7XX, S8XX models: 0.4 VA max. @ 20 V AC or DC max. or 15 amps @ 125 V AC; 6 amps @ 250 V AC 

Notes: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

1. Contacts & Terminals: Copper, with gold plate over nickel plate.

2. Contacts & Terminals: Copper, silver plated (standard with all termination options).


3. Contacts & Terminals: Copper, with gold plate over nickel plate over silver plate.

Any models supplied with B, Q or G contact material are RoHS compliant.

All models  with all options when ordered with 'G' or 'Q' contact material. 'G' contact material is equivalent to both 'B' and 'Q' contact materials.


Seal

E Epoxy Seal




Available Hardware

Cap , C2; C3 actuators



Part No.
 121160100 WHITE
 121160200 BLACK
 121160300 RED
Material: 6/6 Nylon
Finish: Matte

Cap, 03 actuators



Part No.
 121000101 WHITE
 121000102 BLACK
 121000103 RED
Material: 6/6 Nylon
Finish: Gloss

Notes: Other colors available, consult Customer Service Center.

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.