

## Wirewound Rheostat/Potentiometer



### FEATURES


- 25 W at 25 °C
- CCTU 05-03B (PA1)
- Vitreous - RT style
- Compliant to RoHS directive 2002/95/EC




**RoHS**  
COMPLIANT

### DIMENSIONS in millimeters


#### ADAPTATION BOARD

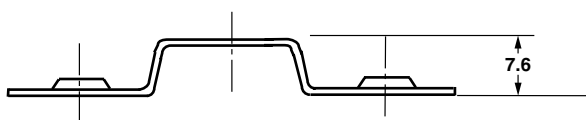


#### PANEL CUT OUT DETAILS

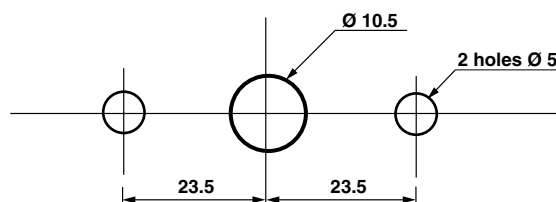

#### RT25-PA1

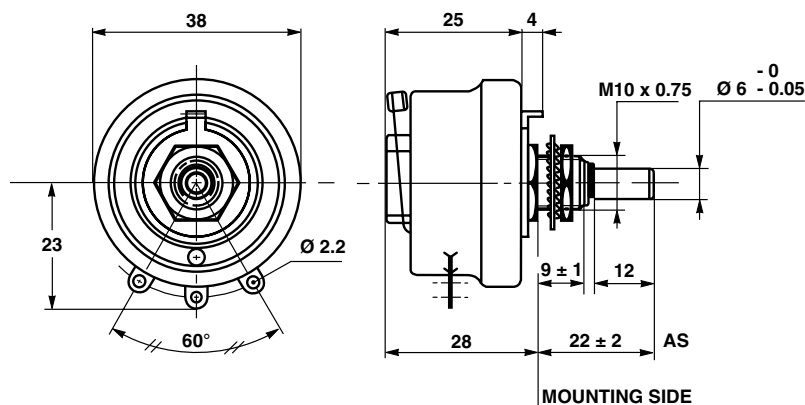

#### PANEL CUT OUT DETAILS

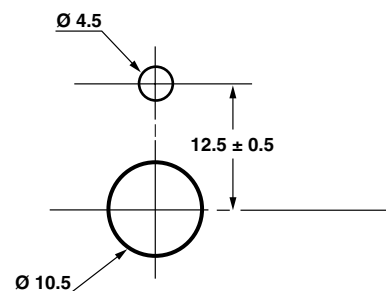

### MECHANICAL SPECIFICATIONS

|                       |                 |
|-----------------------|-----------------|
| Mechanical Protection | Vitreous        |
| Mechanical Travel     | 300° ± 1°       |
| Operating Torque      | 1 Ncm to 10 Ncm |
| End Stop Torque       | 50 Ncm          |
| Unit Weight           | 80 g            |

### ENVIRONMENTAL SPECIFICATIONS


|                   |                           |
|-------------------|---------------------------|
| Temperature Range | - 55 °C + 320 °C          |
| Climatic Category | CCTU 454<br>CEI 55/200/56 |

### LOCKING DEVICE

This is supplied as an option.

The available spindle length is according to the panel thickness.

Order reference: DBA6



### ELECTRICAL SPECIFICATIONS

|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Ohmic Range           | 1 Ω to 4.7 kΩ                                     |
| Tolerance Standard    | ± 10 %                                            |
| Power Rating          | 25 W at 25 °C                                     |
| Variation Law         | Standard: Linear<br>On request: Sectorial winding |
| Dielectric Strength   | 1000 V <sub>RMS</sub>                             |
| Insulation Resistance | 10 <sup>3</sup> MΩ (500 V <sub>CC</sub> )         |

### ADAPTATION BOARD

This enables 2 point mounting instead of bush mounting. The adaptation board is supplied as an option with 2 mounting screws. Consequently, the available spindle length is reduced by 9.5 mm.

## PARTICULAR CHARACTERISTICS

| NOMINAL RESISTANCE<br>$\Omega$ | MAX. SERVICE VOLTAGE<br>V | MAX. CURRENT THROUGH WIPER<br>mA |
|--------------------------------|---------------------------|----------------------------------|
| 1                              | 5                         | 5000                             |
| 1.5                            | 6.12                      | 4080                             |
| 2.2                            | 7.42                      | 3370                             |
| 3.3                            | 9.08                      | 2750                             |
| 4.7                            | 10.8                      | 2300                             |
| 6.8                            | 13                        | 1920                             |
| 10                             | 15.8                      | 1580                             |
| 15                             | 19.4                      | 1290                             |
| 22                             | 23.5                      | 1070                             |
| 33                             | 28.7                      | 870                              |
| 47                             | 34.3                      | 730                              |
| 68                             | 41.2                      | 605                              |
| 100                            | 50                        | 500                              |
| 150                            | 61.2                      | 408                              |
| 220                            | 74.2                      | 337                              |
| 330                            | 90.8                      | 275                              |
| 470                            | 108                       | 230                              |
| 680                            | 130                       | 192                              |
| 1K                             | 158                       | 158                              |
| 1.5K                           | 194                       | 129                              |
| 2.2K                           | 235                       | 107                              |
| 3.3K                           | 287                       | 87                               |
| 4.7K                           | 343                       | 73                               |

## MARKING


SFERNICE trademark, series, style, power rating in watts, ohmic value (in  $\Omega$  or k $\Omega$ ), tolerance (in %), maximum current in A, manufacturing date

## SPINDLES


| $\varnothing$ mm | DISTANCE TO MOUNTING PLATE mm | SCREW DRIVER SLOT | CODE |
|------------------|-------------------------------|-------------------|------|
| 6                | 22                            | With              | ASF  |
|                  | 25                            | Without           | AM   |
|                  |                               | With              | AMF  |
| 6                | 50                            | Without           | AL   |
|                  | 22                            | Without           | AS   |

For any special requirement on request: spindle flats, etc.  
Please supply detailed drawing.

## COMMAND SHAFT 29JF (OPTION)



## DIAL CG57 (OPTION)



## ORDERING INFORMATION

| RT    | 025   | ASF     | 2201        | K         | B         | XXX            |
|-------|-------|---------|-------------|-----------|-----------|----------------|
| MODEL | STYLE | SPINDLE | OHMIC VALUE | TOLERANCE | PACKAGING | SPECIAL DESIGN |

## GLOBAL PART NUMBER INFORMATION

| <div style="display: flex; justify-content: space-around; font-weight: bold;"> <span>R</span><span>T</span><span>0</span><span>2</span><span>5</span><span>A</span><span>S</span><span>1</span><span>0</span><span>R</span><span>0</span><span>K</span><span>B</span> </div> |      |                       |                                                            |                                                      |                                                                                                                                                                                                                                            |                     |                                                                      |                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------------------|------------------------------------------------------------|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------------------------------------------------------------------|----------------------------|
| GLOBAL MODEL                                                                                                                                                                                                                                                                 | SIZE | LOCKING DEVICE (OPT.) | WINDING (OPT.)                                             | COMMAND SHAFT                                        | OHMIC VALUE                                                                                                                                                                                                                                | TOLERANCE           | PACKAGING                                                            | SPECIAL                    |
| RT                                                                                                                                                                                                                                                                           | 025  | D                     | BXXX or BXXXX<br>As applicable<br>xxx(x) = Internal number | AS = Standard (Diam: 6 mm)<br>AM<br>AMF<br>AL<br>ASF | The three first digits are significant figures and the last digit specifies the number of zeros to follow.<br>R designates decimal point.<br><br>2002 = 20 k $\Omega$<br>4700 = 470 $\Omega$<br>10R0 = 10 $\Omega$<br>0R01 = 0.01 $\Omega$ | J = 5 %<br>K = 10 % | B = Bulk<br>BO10<br><br>No standard packaging:<br>N = Bulk, qty open | As applicable<br>Ex = DXxx |



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.