


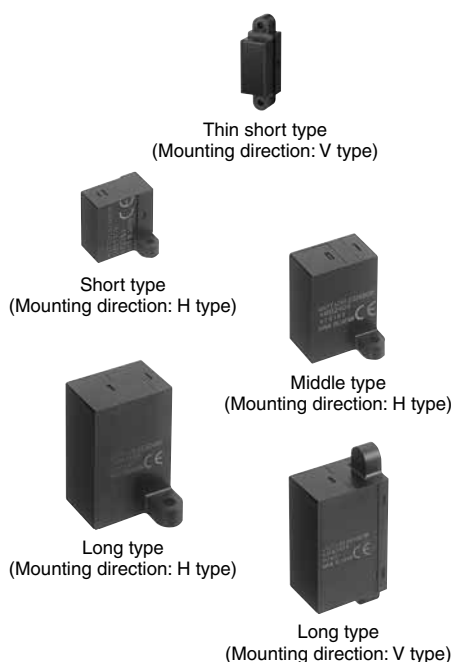

RoHS compliant

### FEATURES

#### 1. Now even more miniature.

The new thin type cuts 35% from the thickness of the previous short type. Device installing is now easier than ever.

#### 2. Certain detection unaffected by the reflectance of the object

The sensor can provide stable detection that is not affected by the condition (color or material of the clothing) or parts (skin, hair, etc.) of the object being monitored. (Reflectance 18% to 90%). Excellent performance even when the detection surface is dirty.

#### 3. Only connecting DC power supply for operating

Built-in oscillation circuit type obviates the hitherto existing need for start signal input.

#### 4. Use in adjacent positions is possible

These sensors can be located in adjacent positions, because the timing of the external trigger signals can be adjusted so that the beam frequency of each adjacent sensor will not interfere with the other.

### APPLICATIONS

#### 1. Water-based product market

- Automatic lighting of wash basin units
- Toilets

#### 2. Stores and financial institutions

- Automatic doors
- Automatic lighting
- Cash dispensing machines
- Automatic teller machines
- Visitor detecting sensors

#### 3. Amusement market

- Automatic lighting for game display

#### 4. Medical field

- Non-contact switch

## ORDERING INFORMATION

AM

A: Thin short type MA Motion sensor

B: MA Motion sensor

Detection distance type (shape)

- 1: Short type
- 2: Middle type
- 3: Long type

Triggering function

- 1: External triggering type
- 4: Built-in oscillation circuit type (Internal trigger)

Classification by output method & mounting direction

- 0: NPN open collector/H type
- 5: NPN open collector/V type
- 6: PNP open collector/V type

Operating voltage

- 2: Free-ranging power type (6.5 to 27V DC)
- 9: 5V DC type (4.5 to 6.5V DC)

Rated detection distance

| Part No.        | 02    | 03     | 04     | 05     | 06     | 07     | 08<br>(Middle type<br>does not<br>need 08) | 09     | 10<br>(Short type<br>does not<br>need 10) | 11     | 12     | 13     | 14     | 15     | 16     | 17     | 18     | 19     | 20<br>(Long type<br>does not<br>need 20) |
|-----------------|-------|--------|--------|--------|--------|--------|--------------------------------------------|--------|-------------------------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------------------------------------------|
| Type            | —     | —      | —      | 5      | —      | —      | —                                          | —      | 10                                        | —      | —      | —      | —      | 15     | —      | —      | —      | —      | —                                        |
| Thin short type | —     | —      | —      | 1.969  | —      | —      | —                                          | —      | 3.937                                     | —      | —      | —      | —      | 5.906  | —      | —      | —      | —      | —                                        |
| Short type      | —     | —      | —      | 5      | 6      | 7      | 8                                          | 9      | 10                                        | —      | —      | —      | —      | —      | —      | —      | —      | —      | —                                        |
| Middle type     | 20    | 30     | 40     | 50     | 60     | 70     | 80                                         | —      | —                                         | —      | —      | —      | —      | —      | —      | —      | —      | —      | —                                        |
| Long type       | —     | 30     | 40     | 50     | 60     | 70     | 80                                         | 90     | 100                                       | 110    | 120    | 130    | 140    | 150    | 160    | 170    | 180    | 190    | 200                                      |
|                 | 7.874 | 11.811 | 15.748 | 19.685 | 23.622 | 27.559 | 31.496                                     | 35.433 | 39.37                                     | 43.307 | 47.244 | 51.181 | 55.118 | 59.055 | 62.992 | 66.929 | 70.866 | 74.803 | 78.74                                    |

# MA Motion Sensor (AMA1, AMB1, 2, 3)

## PRODUCT TYPES

### 1. Detection distance type (distance limited)

#### 1) Thin short type (V type)

| Operating voltage | Output method             | Rated detection distance | Built-in oscillation circuit type | External triggering type |
|-------------------|---------------------------|--------------------------|-----------------------------------|--------------------------|
|                   |                           |                          | Part No.                          | Part No.                 |
| 4.5 to 5.5 V DC   | NPN open collector output | 5 cm 1.969 inch          | AMA145905                         | AMA115905                |
|                   |                           | 10 cm 3.937 inch         | AMA1459                           | AMA1159                  |
|                   |                           | 15 cm 5.906 inch         | AMA145915                         | AMA115915                |
|                   | PNP open collector output | 5 cm 1.969 inch          | AMA146905                         | AMA116905                |
|                   |                           | 10 cm 3.937 inch         | AMA1469                           | AMA1169                  |
|                   |                           | 15 cm 5.906 inch         | AMA146915                         | AMA116915                |

Standard packing: Carton: 20 pcs.; Case: 200 pcs.  
Note: If you plan to use multiple sensors side-by-side, or you wish to keep the current consumption small, inquire for details about external trigger type, which is suitable for such applications.

#### 2) Short type (H type)

| Rated operating voltage | Rated detection distance | Mounting direction: H type        |                          |
|-------------------------|--------------------------|-----------------------------------|--------------------------|
|                         |                          | Short type                        |                          |
|                         |                          | Built-in oscillation circuit type | External triggering type |
|                         |                          | Part No.                          | Part No.                 |
| 4.5 to 5.5 V DC         | 5 cm 1.969 inch          | AMB140905                         | AMB110905                |
|                         | 6 cm 2.362 inch          | AMB140906                         | AMB110906                |
|                         | 7 cm 2.756 inch          | AMB140907                         | AMB110907                |
|                         | 8 cm 3.150 inch          | AMB140908                         | AMB110908                |
|                         | 9 cm 3.543 inch          | AMB140909                         | AMB110909                |
|                         | 10 cm 3.937 inch         | AMB1409                           | AMB1109                  |
| 5.5 to 27 V DC          | 5 cm 1.969 inch          | AMB140205                         | AMB110205                |
|                         | 6 cm 2.362 inch          | AMB140206                         | AMB110206                |
|                         | 7 cm 2.756 inch          | AMB140207                         | AMB110207                |
|                         | 8 cm 3.150 inch          | AMB140208                         | AMB110208                |
|                         | 9 cm 3.543 inch          | AMB140209                         | AMB110209                |
|                         | 10 cm 3.937 inch         | AMB1402                           | AMB1102                  |

Standard packing: Carton: 20 pcs.; Case: 200 pcs.  
Note: If you plan to use multiple sensors side-by-side, or you wish to keep the current consumption small, inquire for details about external trigger type, which is suitable for such applications.

#### 3) Middle type (H type)

| Rated operating voltage | Rated detection distance | Mounting direction: H type        |                          |
|-------------------------|--------------------------|-----------------------------------|--------------------------|
|                         |                          | Middle type                       |                          |
|                         |                          | Built-in oscillation circuit type | External triggering type |
|                         |                          | Part No.                          | Part No.                 |
| 4.5 to 5.5 V DC         | 20 cm 7.874 inch         | AMB240902                         | AMB210902                |
|                         | 30 cm 11.811 inch        | AMB240903                         | AMB210903                |
|                         | 40 cm 15.748 inch        | AMB240904                         | AMB210904                |
|                         | 50 cm 19.685 inch        | AMB240905                         | AMB210905                |
|                         | 60 cm 23.622 inch        | AMB240906                         | AMB210906                |
|                         | 70 cm 27.559 inch        | AMB240907                         | AMB210907                |
|                         | 80 cm 31.496 inch        | AMB2409                           | AMB2109                  |
| 5.5 to 27 V DC          | 20 cm 7.874 inch         | AMB240202                         | AMB210202                |
|                         | 30 cm 11.811 inch        | AMB240203                         | AMB210203                |
|                         | 40 cm 15.748 inch        | AMB240204                         | AMB210204                |
|                         | 50 cm 19.685 inch        | AMB240205                         | AMB210205                |
|                         | 60 cm 23.622 inch        | AMB240206                         | AMB210206                |
|                         | 70 cm 27.559 inch        | AMB240207                         | AMB210207                |
|                         | 80 cm 31.496 inch        | AMB2402                           | AMB2102                  |

Standard packing: Carton: 20 pcs.; Case: 200 pcs.  
Note: If you plan to use multiple sensors side-by-side, or you wish to keep the current consumption small, inquire for details about external trigger type, which is suitable for such applications.

# MA Motion Sensor (AMA1, AMB1, 2, 3)

## 4) Long type

| Rated operating voltage | Rated detection distance | Mounting direction: H type        |                          | Mounting direction: V type        |                          |           |
|-------------------------|--------------------------|-----------------------------------|--------------------------|-----------------------------------|--------------------------|-----------|
|                         |                          | Long type                         |                          |                                   |                          |           |
|                         |                          | Built-in oscillation circuit type | External triggering type | Built-in oscillation circuit type | External triggering type |           |
|                         |                          | Part No.                          | Part No.                 | Part No.                          | Part No.                 |           |
| 4.5 to 5.5 V DC         | 30 cm 11.811 inch        | AMB340903                         | AMB310903                | AMB345903                         | AMB315903                |           |
|                         | 40 cm 15.748 inch        | AMB340904                         | AMB310904                | AMB345904                         | AMB315904                |           |
|                         | 50 cm 19.685 inch        | AMB340905                         | AMB310905                | AMB345905                         | AMB315905                |           |
|                         | 60 cm 23.622 inch        | AMB340906                         | AMB310906                | AMB345906                         | AMB315906                |           |
|                         | 70 cm 27.559 inch        | AMB340907                         | AMB310907                | AMB345907                         | AMB315907                |           |
|                         | 80 cm 31.496 inch        | AMB340908                         | AMB310908                | AMB345908                         | AMB315908                |           |
|                         | 90 cm 35.433 inch        | AMB340909                         | AMB310909                | AMB345909                         | AMB315909                |           |
|                         | 100 cm 39.370 inch       | AMB340910                         | AMB310910                | AMB345910                         | AMB315910                |           |
|                         | 110 cm 43.307 inch       | AMB340911                         | AMB310911                | AMB345911                         | AMB315911                |           |
|                         | 120 cm 47.244 inch       | AMB340912                         | AMB310912                | AMB345912                         | AMB315912                |           |
|                         | 130 cm 51.181 inch       | AMB340913                         | AMB310913                | AMB345913                         | AMB315913                |           |
|                         | 140 cm 55.118 inch       | AMB340914                         | AMB310914                | AMB345914                         | AMB315914                |           |
|                         | 150 cm 59.055 inch       | AMB340915                         | AMB310915                | AMB345915                         | AMB315915                |           |
|                         | 160 cm 62.992 inch       | AMB340916                         | AMB310916                | AMB345916                         | AMB315916                |           |
|                         | 170 cm 66.929 inch       | AMB340917                         | AMB310917                | AMB345917                         | AMB315917                |           |
|                         | 180 cm 70.866 inch       | AMB340918                         | AMB310918                | AMB345918                         | AMB315918                |           |
|                         | 190 cm 74.803 inch       | AMB340919                         | AMB310919                | AMB345919                         | AMB315919                |           |
|                         | 200 cm 78.740 inch       | AMB3409                           | AMB3109                  | AMB3459                           | AMB3159                  |           |
|                         | 5.5 to 27 V DC           | 30 cm 11.811 inch                 | AMB340203                | AMB310203                         | AMB345203                | AMB315203 |
|                         |                          | 40 cm 15.748 inch                 | AMB340204                | AMB310204                         | AMB345204                | AMB315204 |
| 50 cm 19.685 inch       |                          | AMB340205                         | AMB310205                | AMB345205                         | AMB315205                |           |
| 60 cm 23.622 inch       |                          | AMB340206                         | AMB310206                | AMB345206                         | AMB315206                |           |
| 70 cm 27.559 inch       |                          | AMB340207                         | AMB310207                | AMB345207                         | AMB315207                |           |
| 80 cm 31.496 inch       |                          | AMB340208                         | AMB310208                | AMB345208                         | AMB315208                |           |
| 90 cm 35.433 inch       |                          | AMB340209                         | AMB310209                | AMB345209                         | AMB315209                |           |
| 100 cm 39.370 inch      |                          | AMB340210                         | AMB310210                | AMB345210                         | AMB315210                |           |
| 110 cm 43.307 inch      |                          | AMB340211                         | AMB310211                | AMB345211                         | AMB315211                |           |
| 120 cm 47.244 inch      |                          | AMB340212                         | AMB310212                | AMB345212                         | AMB315212                |           |
| 130 cm 51.181 inch      |                          | AMB340213                         | AMB310213                | AMB345213                         | AMB315213                |           |
| 140 cm 55.118 inch      |                          | AMB340214                         | AMB310214                | AMB345214                         | AMB315214                |           |
| 150 cm 59.055 inch      |                          | AMB340215                         | AMB310215                | AMB345215                         | AMB315215                |           |
| 160 cm 62.992 inch      |                          | AMB340216                         | AMB310216                | AMB345216                         | AMB315216                |           |
| 170 cm 66.929 inch      |                          | AMB340217                         | AMB310217                | AMB345217                         | AMB315217                |           |
| 180 cm 70.866 inch      |                          | AMB340218                         | AMB310218                | AMB345218                         | AMB315218                |           |
| 190 cm 74.803 inch      |                          | AMB340219                         | AMB310219                | AMB345219                         | AMB315219                |           |
| 200 cm 78.740 inch      |                          | AMB3402                           | AMB3102                  | AMB3452                           | AMB3152                  |           |

Standard packing: Carton: 20 pcs.; Case: 200 pcs.

Note: If you plan to use multiple sensors side-by-side, or you wish to keep the current consumption small, inquire for details about external trigger type, which is suitable for such applications.

## RATING

### 1. Detection performance

1) Thin short type (Measuring conditions: ambient temp.: 25°C 77°F; operating voltage: 5 V DC)

| Items                                                                 |                                  | Thin short type     |                      |                      | Measured conditions                            |                                            |
|-----------------------------------------------------------------------|----------------------------------|---------------------|----------------------|----------------------|------------------------------------------------|--------------------------------------------|
|                                                                       |                                  | 5 cm<br>1.969 inch  | 10 cm<br>3.937 inch  | 15 cm<br>3.937 inch  |                                                |                                            |
| Rated detection distance                                              | Minimum                          | 45 mm<br>1.772 inch | 90 mm<br>3.543 inch  | 135 mm<br>5.315 inch | with a standard reflection board* <sup>1</sup> |                                            |
|                                                                       | Typical                          | 50 mm<br>1.969 inch | 100 mm<br>3.937 inch | 150 mm<br>5.906 inch |                                                |                                            |
|                                                                       | Maximum                          | 55 mm<br>2.165 inch | 110 mm<br>4.331 inch | 165 mm<br>6.496 inch |                                                |                                            |
|                                                                       |                                  |                     |                      |                      |                                                |                                            |
| Measuring tolerance                                                   |                                  | Typical             | 10%                  | 25%                  | 35%                                            | Reflection rate:<br>90 to 18%              |
| Usable ambient brightness (Resistance to ambient light)* <sup>2</sup> | Brightness of sensor surface     | Maximum             | 30,000 lx            |                      |                                                | See the drawing (Fig. 1) on the next page. |
|                                                                       | Brightness of reflection surface | Maximum             | 24,000 lx            |                      |                                                |                                            |

Notes: \*1. Ambient brightness: 500 lx

\*2. Install so that light from direct light sources does not enter the sensor (within 30° of the sensor light beam).

Indicates brightness detectible enough for sensor operation.

# MA Motion Sensor (AMA1, AMB1, 2, 3)

2) Short type (Measuring conditions: ambient temp.: 25°C 77°F; operating voltage: 5 V DC type 5V, Free-ranging power type 24V DC)

| Items                                                     |                                  |            | Short type*1       |                    |                    |                    |                    |                                  | Measured conditions                        |
|-----------------------------------------------------------|----------------------------------|------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------------------------------|--------------------------------------------|
|                                                           |                                  |            | 5 cm<br>1.969 inch | 6 cm<br>2.362 inch | 7 cm<br>2.756 inch | 8 cm<br>3.150 inch | 9 cm<br>3.543 inch | 10 cm<br>3.937 inch              |                                            |
| Rated detection distance                                  | Minimum                          | 45 mm      | 54 mm              | 63 mm              | 72 mm              | 81 mm              | 90 mm              | with a standard reflection board |                                            |
|                                                           | Typical                          | 1.772 inch | 2.126 inch         | 2.480 inch         | 2.835 inch         | 3.189 inch         | 3.543 inch         |                                  |                                            |
|                                                           |                                  | 50 mm      | 60 mm              | 70 mm              | 80 mm              | 90 mm              | 100 mm             |                                  |                                            |
|                                                           |                                  | 1.969 inch | 2.362 inch         | 2.756 inch         | 3.150 inch         | 3.543 inch         | 3.937 inch         |                                  |                                            |
| Maximum                                                   | 55 mm                            | 66 mm      | 77 mm              | 88 mm              | 99 mm              | 110 mm             |                    |                                  |                                            |
|                                                           | 2.165 inch                       | 2.598 inch | 3.031 inch         | 3.465 inch         | 3.898 inch         | 4.331 inch         |                    |                                  |                                            |
| Measuring tolerance                                       |                                  | Typical    | 10%                |                    | 15%                | 20%                |                    | 25%                              | Reflection rate: 90 to 18%                 |
| Usable ambient brightness (Resistance to ambient light)*2 | Brightness of sensor surface     | Maximum    | 30,000 lx          |                    |                    |                    |                    |                                  | See the drawing (Fig. 1) on the next page. |
|                                                           | Brightness of reflection surface | Maximum    | 24,000 lx          |                    |                    |                    |                    |                                  |                                            |

Notes: \*1. After receipt of order, average rated detection distance to 15 cm 5.906 inch is possible. Please inquire.

\*2. Install so that light from direct light sources does not enter the sensor (within 30° of the sensor light beam).

3) Middle type (Measuring conditions: ambient temp.: 25°C 77°F; operating voltage: 5 V DC type 5V, Free-ranging power type 24V DC)

| Items                                                        |                                  |             | Middle type*1       |                      |                      |                      |                      |                      | Measured conditions                           |
|--------------------------------------------------------------|----------------------------------|-------------|---------------------|----------------------|----------------------|----------------------|----------------------|----------------------|-----------------------------------------------|
|                                                              |                                  |             | 20 cm<br>7.874 inch | 30 cm<br>11.811 inch | 40 cm<br>15.748 inch | 50 cm<br>19.685 inch | 60 cm<br>23.622 inch | 70 cm<br>27.559 inch |                                               |
| Rated detection distance                                     | Minimum                          | 190 mm      | 285 mm              | 380 mm               | 475 mm               | 570 mm               | 665 mm               | 760 mm               | with a standard reflection board              |
|                                                              | Typical                          | 7.480 inch  | 11.220 inch         | 14.961 inch          | 18.701 inch          | 22.441 inch          | 26.181 inch          | 29.921 inch          |                                               |
|                                                              |                                  | 200 mm      | 300 mm              | 400 mm               | 500 mm               | 600 mm               | 700 mm               | 800 mm               |                                               |
|                                                              |                                  | 7.874 inch  | 11.811 inch         | 15.748 inch          | 19.685 inch          | 23.622 inch          | 27.559 inch          | 31.496 inch          |                                               |
| Maximum                                                      | 210 mm                           | 315 mm      | 420 mm              | 525 mm               | 630 mm               | 735 mm               | 840 mm               |                      |                                               |
|                                                              | 8.268 inch                       | 12.402 inch | 16.535 inch         | 20.669 inch          | 24.803 inch          | 28.937 inch          | 33.071 inch          |                      |                                               |
| Measuring tolerance                                          |                                  | Typical     | 3%                  |                      |                      | 5%                   |                      | 10%                  | Reflection rate:<br>90 to 18%                 |
| Usable ambient brightness<br>(Resistance to ambient light)*2 | Brightness of sensor surface     | Maximum     | 30,000 lx           |                      |                      |                      |                      |                      | See the drawing<br>(Fig. 1) on the next page. |
|                                                              | Brightness of reflection surface | Maximum     | 24,000 lx           |                      |                      |                      |                      |                      |                                               |

Notes: \*1. After receipt of order, average rated detection distance to 110 cm 43.307 inch is possible. Please inquire.

\*2. Install so that light from direct light sources does not enter the sensor (within 30° of the sensor light beam).

4) Long type (Measuring conditions: ambient temp.: 25°C 77°F; operating voltage: 5 V DC type 5V, Free-ranging power type 24V DC)

| Items                                                       |                                  |                       | Long type             |                       |                       |                       |                       |                       |                       |                        | Measured conditions                           |
|-------------------------------------------------------------|----------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------|-----------------------------------------------|
|                                                             |                                  |                       | 30 cm<br>11.811 inch  | 40 cm<br>15.748 inch  | 50 cm<br>19.685 inch  | 60 cm<br>23.622 inch  | 70 cm<br>27.559 inch  | 80 cm<br>31.496 inch  | 90 cm<br>35.433 inch  | 100 cm<br>39.37 inch   |                                               |
| Rated detection distance                                    | Minimum                          | 285 mm<br>11.220 inch | 380 mm<br>14.961 inch | 475 mm<br>18.701 inch | 570 mm<br>22.441 inch | 665 mm<br>26.181 inch | 760 mm<br>29.921 inch | 855 mm<br>33.661 inch | 950 mm<br>37.402 inch | 1045 mm<br>41.142 inch | with a standard reflection board              |
|                                                             | Typical                          | 300 mm                | 400 mm                | 500 mm                | 600 mm                | 700 mm                | 800 mm                | 900 mm                | 1000 mm               | 1100 mm                |                                               |
|                                                             | Maximum                          | 11.811 inch<br>315 mm | 15.748 inch<br>420 mm | 19.685 inch<br>525 mm | 23.622 inch<br>630 mm | 27.559 inch<br>735 mm | 31.496 inch<br>840 mm | 34.433 inch<br>945 mm | 39.37 inch<br>1050 mm | 43.307 inch<br>1155 mm |                                               |
|                                                             |                                  | 12.402 inch           | 16.535 inch           | 20.669 inch           | 24.803 inch           | 28.937 inch           | 33.071 inch           | 37.205 inch           | 41.339 inch           | 45.472 inch            |                                               |
| Measuring tolerance                                         |                                  | Typical               | 3%                    |                       |                       |                       |                       | 5%                    |                       |                        | Reflection rate:<br>90 to 18%                 |
| Usable ambient brightness<br>(Resistance to ambient light)* | Brightness of sensor surface     | Maximum               | 30,000 lx             |                       |                       |                       |                       |                       |                       |                        | See the drawing<br>(Fig. 1) on the next page. |
|                                                             | Brightness of reflection surface | Maximum               | 24,000 lx             |                       |                       |                       |                       |                       |                       |                        |                                               |

| Items                                                       |                                  |                        | Long type              |                        |                        |                        |                        |                        |                        |                        | Measured conditions                           |
|-------------------------------------------------------------|----------------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|-----------------------------------------------|
|                                                             |                                  |                        | 120 cm<br>47.244 inch  | 130 cm<br>51.181 inch  | 140 cm<br>55.118 inch  | 150 cm<br>59.055 inch  | 160 cm<br>62.992 inch  | 170 cm<br>66.929 inch  | 180 cm<br>70.866 inch  | 190 cm<br>74.803 inch  |                                               |
| Rated detection distance                                    | Minimum                          | 1140 mm<br>44.882 inch | 1235 mm<br>48.622 inch | 1330 mm<br>52.362 inch | 1425 mm<br>56.102 inch | 1520 mm<br>59.842 inch | 1615 mm<br>63.583 inch | 1710 mm<br>67.323 inch | 1805 mm<br>71.063 inch | 1900 mm<br>74.803 inch | with a standard reflection board              |
|                                                             | Typical                          | 1200 mm                | 1300 mm                | 1400 mm                | 1500 mm                | 1600 mm                | 1700 mm                | 1800 mm                | 1900 mm                | 2000 mm                |                                               |
|                                                             | Maximum                          | 47.244 inch<br>1260 mm | 51.181 inch<br>1365 mm | 55.118 inch<br>1470 mm | 59.055 inch<br>1575 mm | 62.992 inch<br>1680 mm | 66.929 inch<br>1785 mm | 70.866 inch<br>1890 mm | 74.803 inch<br>1995 mm | 78.74 inch<br>2100 mm  |                                               |
|                                                             |                                  | 49.606 inch            | 53.740 inch            | 57.874 inch            | 62.008 inch            | 66.142 inch            | 70.275 inch            | 74.409 inch            | 78.543 inch            | 82.677 inch            |                                               |
| Measuring tolerance                                         |                                  | Typical                | 5%                     | 10%                    |                        |                        | 15%                    |                        |                        |                        | Reflection rate:<br>90 to 18%                 |
| Usable ambient brightness<br>(Resistance to ambient light)* | Brightness of sensor surface     | Maximum                | 30,000 lx              |                        |                        |                        |                        |                        |                        |                        | See the drawing<br>(Fig. 1) on the next page. |
|                                                             | Brightness of reflection surface | Maximum                | 24,000 lx              |                        |                        |                        |                        |                        |                        |                        |                                               |

Note: \* Install so that light from direct light sources does not enter the sensor (within 30° of the sensor light beam).

# MA Motion Sensor (AMA1, AMB1, 2, 3)


- For thin short type:  
Standard reflection board: 150 mm 5.906 inch square area,  
90% reflection rate.
- For short type:  
Standard reflection board: 100 mm 3.937 inch square area,  
90% reflection rate.
- For middle type:  
Standard reflection board: 200 mm 7.874 inch square area,  
90% reflection rate.
- For long type:  
Standard reflection board: 500 mm 19.685 inch square area,  
90% reflection rate.

Notes: 1. Detecting an object within the maximum preset detection distance.

$$2. \text{Distance deviation} = \frac{a-b}{a} \times 100 (\%)$$


(a: detection distance of detection target with reflectance of 90%.  
b: detection distance of standard detection target with reflectance of 18%.)

<Fig. 1>  
[Brightness of sensor surface]

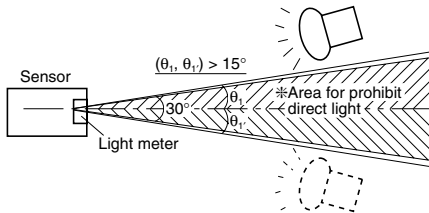

Note: Light from direct light sources (sunlight, strobe light, inverter illumination, reflected light from glass or mirrors etc.) that enters the sensor from within the prohibited range can cause the sensor to operate erroneously.

[Brightness of reflection surface]

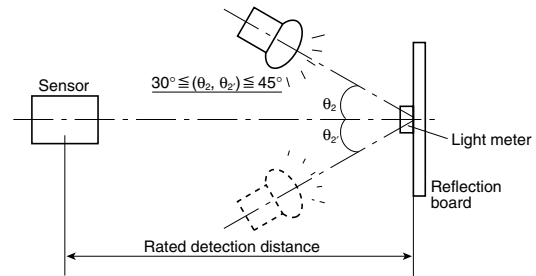

## 2. Absolute maximum rating (Measuring condition: ambient temp.: 25°C 77°F)

| Items                      | Type | Absolute maximum rating                 |                         |                                         |                         |
|----------------------------|------|-----------------------------------------|-------------------------|-----------------------------------------|-------------------------|
|                            |      | Built-in oscillation circuit type       |                         | External triggering type                |                         |
|                            |      | 5 V DC type                             | Free-ranging power type | 5 V DC type                             | Free-ranging power type |
| Power supply voltage       |      | -0.3 to 6 V DC                          | -0.3 to 30 V DC         | -0.3 to 6 V DC                          | -0.3 to 30 V DC         |
| Output dielectric strength |      | 30 V                                    |                         | 30 V                                    |                         |
| Output flow current        |      | 100 mA                                  |                         | 10 mA*                                  |                         |
| Usable ambient temperature |      | -25 to +75°C +5 to +131°F (No freezing) |                         | -25 to +75°C +5 to +131°F (No freezing) |                         |
| Storage temperature        |      | -30 to +85°C -4 to +176°F               |                         | -30 to +85°C -4 to +176°F               |                         |

Note: \* Thin short type is only: 100 mA

## 3. Electrical characteristics

(Measuring conditions: ambient temp.: 25°C 77°F; operating voltage: 5 V DC type =5V DC, free-ranging power type =24V DC)

### 1) Built-in oscillation circuit type



| Items                                     |                 |         | Symbol | Thin short type*                               |                 | Short type                                         | Middle type | Long type | Measured conditions |
|-------------------------------------------|-----------------|---------|--------|------------------------------------------------|-----------------|----------------------------------------------------|-------------|-----------|---------------------|
|                                           |                 |         |        | NPN output type                                | PNP output type |                                                    |             |           |                     |
| Rated operating voltage                   |                 | Minimum | Vdd    | 5V DC type: 4.5V/Free-ranging power type: 5.5V |                 |                                                    |             |           |                     |
|                                           |                 | Typical |        | —                                              |                 |                                                    |             |           |                     |
|                                           |                 | Maximum |        | 5V DC type: 5.5V/Free-ranging power type: 27V  |                 |                                                    |             |           |                     |
| Average current consumption (Iout = 0 mA) | No detection    | Minimum | It     | —                                              |                 |                                                    |             |           |                     |
|                                           |                 | Typical |        | 4.5mA                                          |                 | 5V DC type: 4.5mA/Free-ranging power type: 5.6mA   |             |           |                     |
|                                           |                 | Maximum |        | 6.2mA                                          |                 | 5V DC type: 6.2mA/Free-ranging power type: 7.8mA   |             |           |                     |
|                                           | Detection       | Minimum | It     | —                                              |                 |                                                    |             |           |                     |
|                                           |                 | Typical |        | 7.0mA                                          | 11.0mA          | 5V DC type: 7.0mA/Free-ranging power type: 9.1mA   |             |           |                     |
|                                           |                 | Maximum |        | 11.2mA                                         | 15.2mA          | 5V DC type: 11.2mA/Free-ranging power type: 14.2mA |             |           |                     |
|                                           |                 |         |        |                                                |                 |                                                    |             |           |                     |
| Measuring cycle                           |                 | Minimum | T      | 8ms/cycle                                      |                 |                                                    |             |           |                     |
| Output characteristics                    | Remain voltage  | Maximum | Vr     | 1 V DC                                         | 1.2 V DC        | 1 V DC                                             |             |           | It = 100 mA         |
|                                           | Leakage current | Maximum | II     | 5μA                                            |                 | 3μA                                                |             |           | V = 30V             |

Note: \* The thin short type is only available for 5V DC.

# MA Motion Sensor (AMA1, AMB1, 2, 3)


2) External triggering type (trigger conditions: trigger pulse width = 20μs and trigger synchronization = 5ms)

| Items                                                                     |                          |            | Symbol          | Thin short type<br>Note 1 |                                          | Short type                                 | Middle type                                | Long type                                  | Measured conditions |
|---------------------------------------------------------------------------|--------------------------|------------|-----------------|---------------------------|------------------------------------------|--------------------------------------------|--------------------------------------------|--------------------------------------------|---------------------|
|                                                                           |                          |            |                 | NPN<br>output<br>type     | PNP<br>output<br>type                    |                                            |                                            |                                            |                     |
| Rated operating voltage                                                   |                          |            | Minimum         | Vdd                       | 5V DC type: 4.5V/Free-ranging type: 5.5V |                                            |                                            |                                            |                     |
|                                                                           |                          |            | Typical         |                           | —                                        |                                            |                                            |                                            |                     |
|                                                                           |                          |            | Maximum         |                           | 5V DC type: 5.5V/Free-ranging type: 27V  |                                            |                                            |                                            |                     |
| Average current<br>consumption                                            | Without<br>trigger input | Output OFF | Minimum         | lb                        | —                                        |                                            |                                            | Note 2: *b                                 |                     |
|                                                                           |                          |            | Typical         |                           | 0.1m                                     | 5V DC type: 0.1mA/Free-ranging type: 1.0mA |                                            |                                            |                     |
|                                                                           |                          |            | Maximum         |                           | 0.3m                                     | 5V DC type: 0.3mA/Free-ranging type: 1.8mA |                                            |                                            |                     |
|                                                                           |                          | Output ON  | Minimum         | —                         |                                          |                                            | Note 2: *d                                 |                                            |                     |
|                                                                           |                          |            | Typical         | Id                        | 2.6mA                                    | 6.7mA                                      |                                            | 5V DC type: 0.5mA/Free-ranging type: 1.4mA |                     |
|                                                                           |                          |            | Maximum         |                           | 6.6mA                                    | 9.6mA                                      |                                            | 5V DC type: 3.4mA/Free-ranging type: 4.5mA |                     |
|                                                                           | With trigger<br>input    | Output OFF | Minimum         | la                        | —                                        |                                            |                                            | Note 2: *a                                 |                     |
|                                                                           |                          |            | Typical         |                           | 2.2mA                                    | 5V DC type: 2.2mA/Free-ranging type: 3.1mA |                                            |                                            |                     |
|                                                                           |                          |            | Maximum         |                           | 6.2mA                                    | 5V DC type: 6.2mA/Free-ranging type: 7.2mA |                                            |                                            |                     |
|                                                                           |                          | Output ON  | Minimum         | lc                        | —                                        |                                            |                                            | Note 2: *c                                 |                     |
|                                                                           |                          |            | Typical         |                           | 4.2mA                                    | 6.2mA                                      | 5V DC type: 2.4mA/Free-ranging type: 3.3mA |                                            |                     |
|                                                                           |                          |            | Maximum         |                           | 8.2mA                                    | 12.5mA                                     | 5V DC type: 8.2mA/Free-ranging type: 9.3mA |                                            |                     |
| Measuring cycle (Trigger interval)                                        |                          |            | Minimum         | Tt                        | 5ms/cycle                                |                                            |                                            |                                            |                     |
| External trigger                                                          | Pulse width              | Minimum    | Tw              | 20μs                      |                                          |                                            | Half off the distance period               |                                            |                     |
|                                                                           |                          | Maximum    |                 | 1/2Tt                     |                                          |                                            |                                            |                                            |                     |
|                                                                           | Level                    | Maximum    | V <sub>TL</sub> | 0.8V                      |                                          |                                            | Note 3                                     |                                            |                     |
|                                                                           |                          | Minimum    | V <sub>TH</sub> | 3V                        |                                          |                                            |                                            |                                            |                     |
| Response performance:<br>time from trigger pulse fall to detection output |                          |            | Maximum         | Tr                        | 5ms                                      |                                            |                                            |                                            |                     |
| Output<br>characteristics                                                 | Remain voltage           | Maximum    | Vr              | 1 V DC                    | 1.2 V DC                                 | 1 V                                        |                                            | I = 10 mA                                  |                     |
|                                                                           | Leakage current          | Maximum    | II              | 5μA                       |                                          | 3μA                                        |                                            | V = 30 mA                                  |                     |

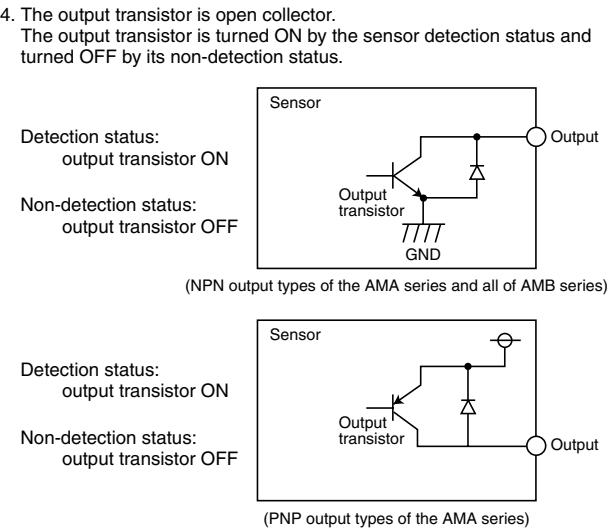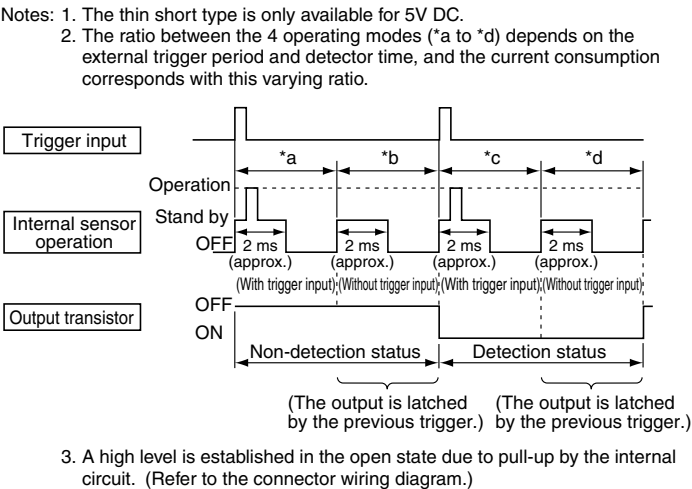



## TIMING CHART

### 1. Built-in oscillation circuit type

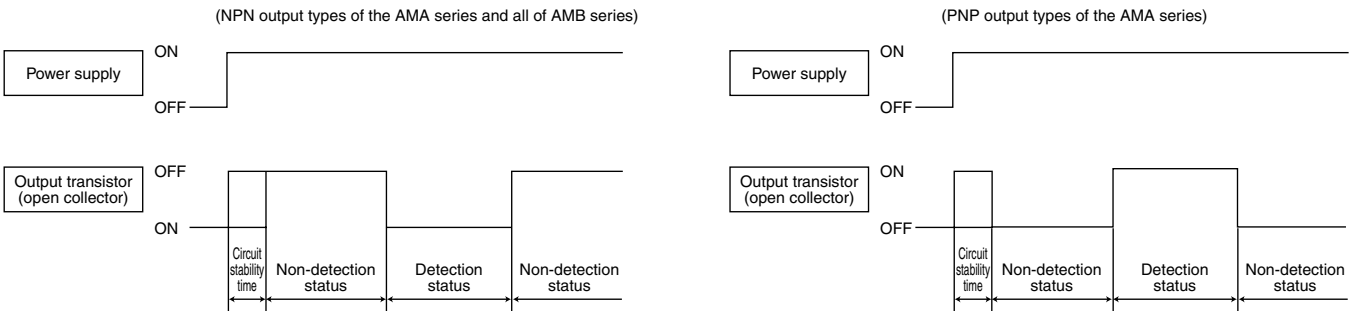

Notes: 1. Circuit stability time : Max. 12 ms  
2. During the time taken for the circuit to stabilize after the power is turned on, the ON/OFF status of the output transistor is not determined by whether the sensor is in the detection status or non-detection status.

## 2. External triggering type

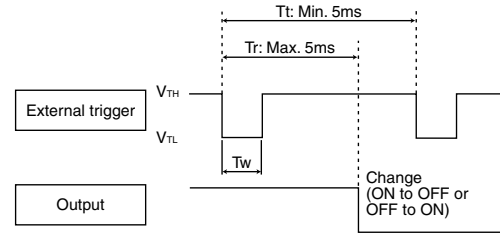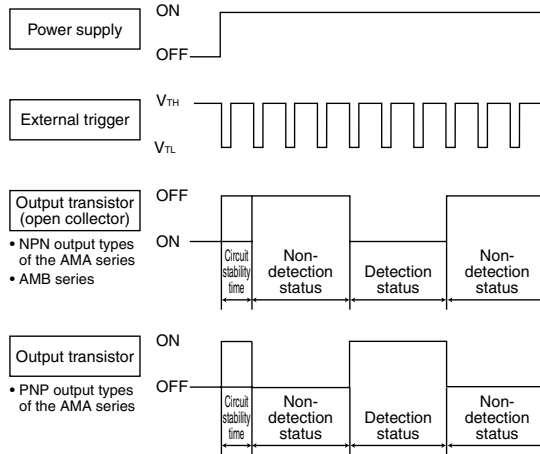


Note: The sensor recognizes at the  $V_{TH} \rightarrow V_{TL}$  edge of an external trigger that the external trigger has been input.

- Notes: 1. Circuit stability time: Max. 12 ms  
 2. During the time taken for the circuit to stabilize after the power is turned on, the ON/OFF status of the output transistor is not determined by whether the sensor is in the detection status or non-detection status.

## HOW TO USE

### 1. Wiring diagram of connector

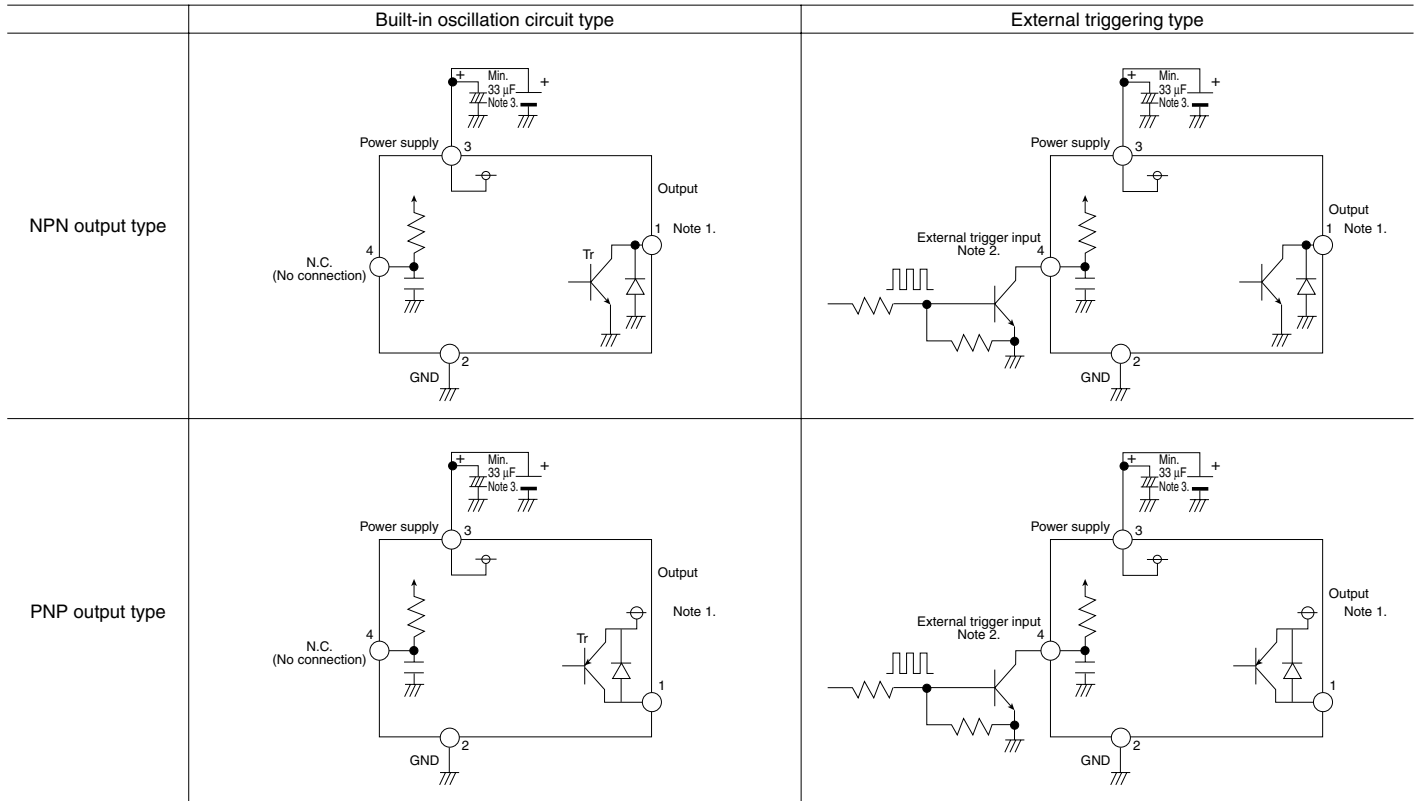

- Notes: 1. The output transistor has an open collector structure.  
 • Detection status: Output transistor ON (connected to GND)  
 • Non-detection status: Output transistor OFF (open state)  
 2. The status of the external trigger input is as follows:  
 • Open at the high level  
 • GND (less than 0.8V) at the low level  
 Under no circumstances must a high-level voltage be applied.  
 3. To maintain the power supply superimposed noise performance, be certain to connect a capacitor (33µF or more) to the sensor power supply input terminal in order to stabilize the power supply voltage.


# MA Motion Sensor (AMA1, AMB1, 2, 3)

## REFERENCE DATA

### Operating region characteristics


- How to interpret the graph

Example: Operating area of the Short Type  
with rated detection distance of  
8 cm 3.150 inch.

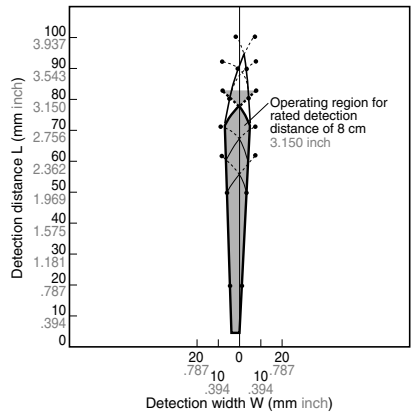

#### Operating area within the dotted lines


Objects that enter the entire area are detected.




Note: If only part of the object is in the detection area, it is not detected.

#### Operating area within the solid lines


Objects that even partially enter the area are detected.




### 1.-(1) Thin short type (AMA14□□□□□) Short type (AMB14□□□□□)

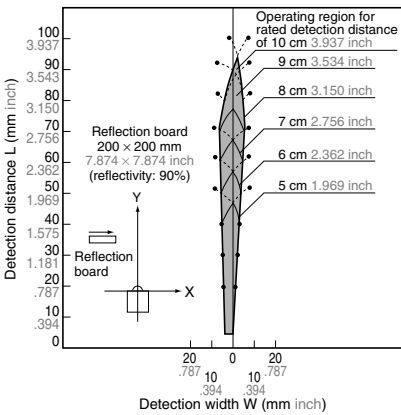

### 1.-(2) Middle type (AMB24□□□□□)

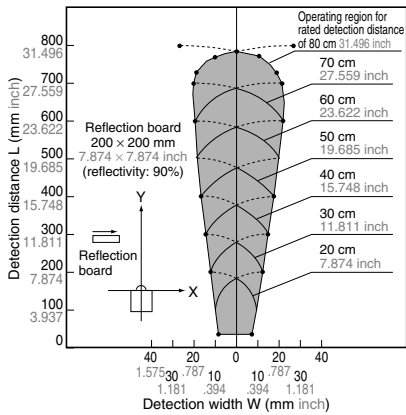

### 1.-(3) Long type (AMB34□□□□□)

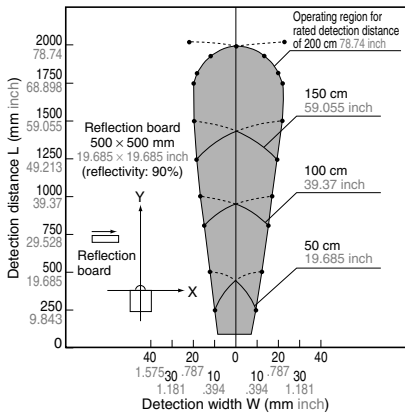


## DIMENSIONS (mm inch)

The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://industrial.panasonic.com/ac/e/>

(Common to the Built-in oscillation circuit type and External triggering type)

### 1. Thin short type (V type)


#### CAD Data



\*Rear side connector protrusion: Max. 0.4mm


### 2. Short type (H type)

#### CAD Data




### 3. Middle type (H type)

#### CAD Data

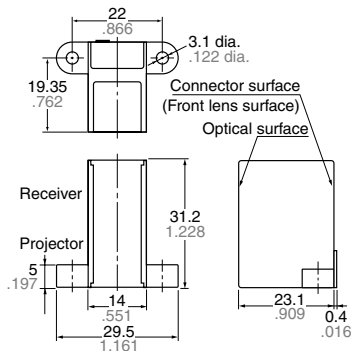


## MA Motion Sensor (AMA1, AMB1, 2, 3)

#### 4. Long type (H type)

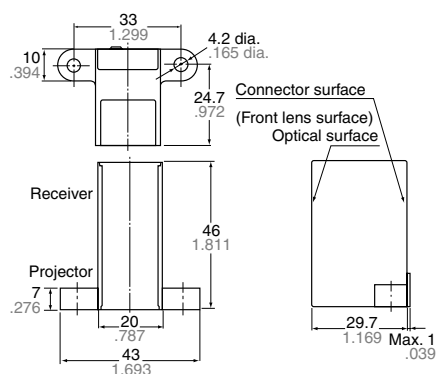
**CAD Data**

### 5. Long type (V type)

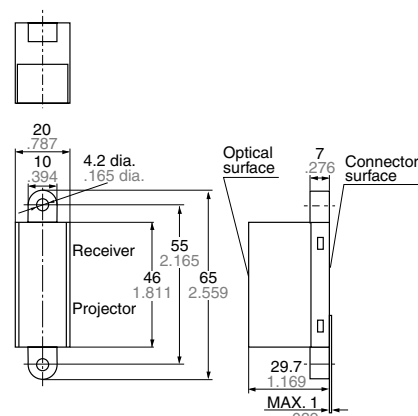
**CAD Data**

### WIRING DIAGRAM (Connector surface view)


### 1. Thin short type (V type)




## 2. Short type (H type)

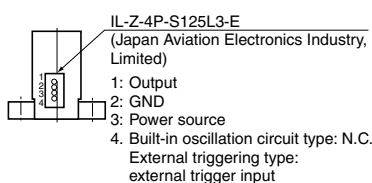


### 3. Middle type (H type)

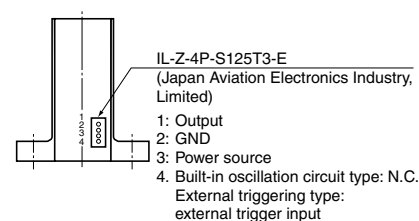

#### 4. Long type (H type)

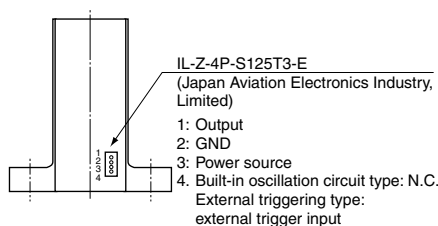


### 5. Long type (V type)

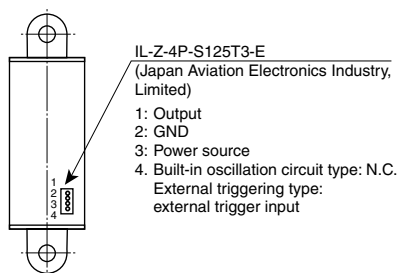

## OPTIONS (mm inch)

### 1. Connector with cable (for Short, Middle and Long type)


AMV9001

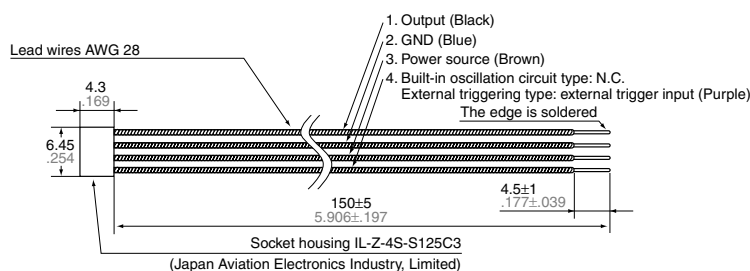

**Note:** Mistaken cable assembly can cause damage to the internal circuits, so please check the power cord before switching ON. (Particular care must be taken as to avoid reverse connection of the power.)

## 2. Connector with cable (for Thin short type)

AMV9002

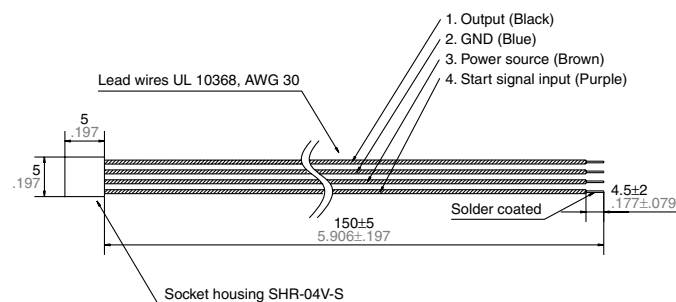

# MA Motion Sensor (AMA1, AMB1, 2, 3)

## NOTES

### 1. Environment

- 1) Avoid using the sensor in environments containing excessive amounts of steam, dust, corrosive gas, or where organic solvents are present.
- 2) When the sensor is used in noisy environments, implement a countermeasure such as connecting a capacitor (Min. 33  $\mu$ F) across the power input terminals. Only use the sensor after verifying actual operation.

### 2. Wiring

- 1) Check all wiring before applying power. Incorrect wiring may damage the internal circuit (in particular, check that the connection to the power supply is not reversed.)
- 2) Avoid excessive removing and replacing of the connector.

### 3. Detector surface (Optical surface)


- 1) Keep the detector surface clean. Excessive dust or dirt on the detector surface will deteriorate the sensing performance.
- 2) Do not allow condensation or freezing to occur on the surface of the sensor. If condensation or freezing does occur at low temperatures, the sensor may not detect objects correctly.
- 3) This product is designed to detect the existence of human bodies. The sensor may not detect properly or the detection distance may become unstable if the objects consist of a low reflective material (e.g., an object coated with black rubber, etc.) or of a highly reflective material (e.g., mirror, glass, coated paper, etc.).

- 4) The front surface of the lens and case are made of polycarbonate resin and can withstand water, alcohol, oils, salts and weak acids. Other fluids such as alkalines, aromatic hydrocarbons and halogenated hydrocarbons may melt or swell the lens and case, please do not have such fluids touch the lens and case.
- 5) If you use the sensor with a cover or filter connected to the front of the sensor, the sensor may detect the cover itself, the detection distance can change, and unstable operation can result.
- 6) If this sensor is used in a position where it will be facing another sensor, light will be received from the other sensor which can cause mutual interference and malfunction. Therefore, please verify the installation conditions before use.
- 7) When multiple sensors are to be used side by side, please verify that there will be no mutual interference by installing them with the proper spacing, depending on the type as shown below.

| Model number | Sensor spacing   |
|--------------|------------------|
| AMB1 series  | 5 cm 1.969 inch  |
| AMA1 series  | 8 cm 3.150 inch  |
| AMB2 series  | 10 cm 3.937 inch |
| AMB3 series  | 20 cm 7.874 inch |

### 4. Recommended installation procedure

Install the sensor so that it is orientated correctly in relation to the pass directions of the target objects as shown in the figure below.

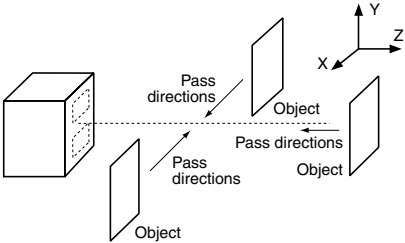

\* → stands for pass direction of the target object.

For the general precautions, refer to “NOTES FOR USING MOTION SENSOR (Common)” on next page.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panasonic:

[AMB1402](#) [AMB140205](#) [AMB140206](#) [AMB140207](#) [AMB140208](#) [AMB140209](#) [AMB1409](#) [AMB140905](#) [AMB140906](#)  
[AMB140907](#) [AMB140908](#) [AMB140909](#) [AMB2109](#) [AMB210902](#) [AMB210904](#) [AMB210905](#) [AMB210906](#) [AMB210907](#)  
[AMB2402](#) [AMB240202](#) [AMB240203](#) [AMB240204](#) [AMB240205](#) [AMB240206](#) [AMB240207](#) [AMB2409](#) [AMB240902](#)  
[AMB240903](#) [AMB240904](#) [AMB240905](#) [AMB240906](#) [AMB240907](#) [AMB245210](#) [AMB310210](#) [AMB310908](#) [AMB3159](#)  
[AMB315914](#) [AMB315915](#) [AMB3401219](#) [AMB34016](#) [AMB3402](#) [AMB340203](#) [AMB340204](#) [AMB340205](#)  
[AMB340206](#) [AMB340207](#) [AMB340208](#) [AMB340209](#) [AMB340210](#) [AMB340211](#) [AMB340212](#) [AMB340213](#)  
[AMB340214](#) [AMB340215](#) [AMB340216](#) [AMB340217](#) [AMB340218](#) [AMB340219](#) [AMB3409](#) [AMB340903](#) [AMB340904](#)  
[AMB340905](#) [AMB340906](#) [AMB340907](#) [AMB340908](#) [AMB340909](#) [AMB340910](#) [AMB340911](#) [AMB340912](#)  
[AMB340913](#) [AMB340914](#) [AMB340915](#) [AMB340916](#) [AMB340917](#) [AMB340918](#) [AMB340919](#) [AMB3452](#) [AMB345203](#)  
[AMB345204](#) [AMB345205](#) [AMB345206](#) [AMB345207](#) [AMB345208](#) [AMB345209](#) [AMB345210](#) [AMB345211](#)  
[AMB345212](#) [AMB345213](#) [AMB345214](#) [AMB345215](#) [AMB345216](#) [AMB345217](#) [AMB345218](#) [AMB345219](#)  
[AMB3454204](#) [AMB3459](#) [AMB345903](#) [AMB345904](#) [AMB345905](#) [AMB345906](#)