


LOC		DIST		REVISIONS						
AF	50	P	F	ZONE	LTR	DESCRIPTION			DATE	APPD
					E	ADD -2 PER 0L10-0469-97			12/JAN/98	PF/JW

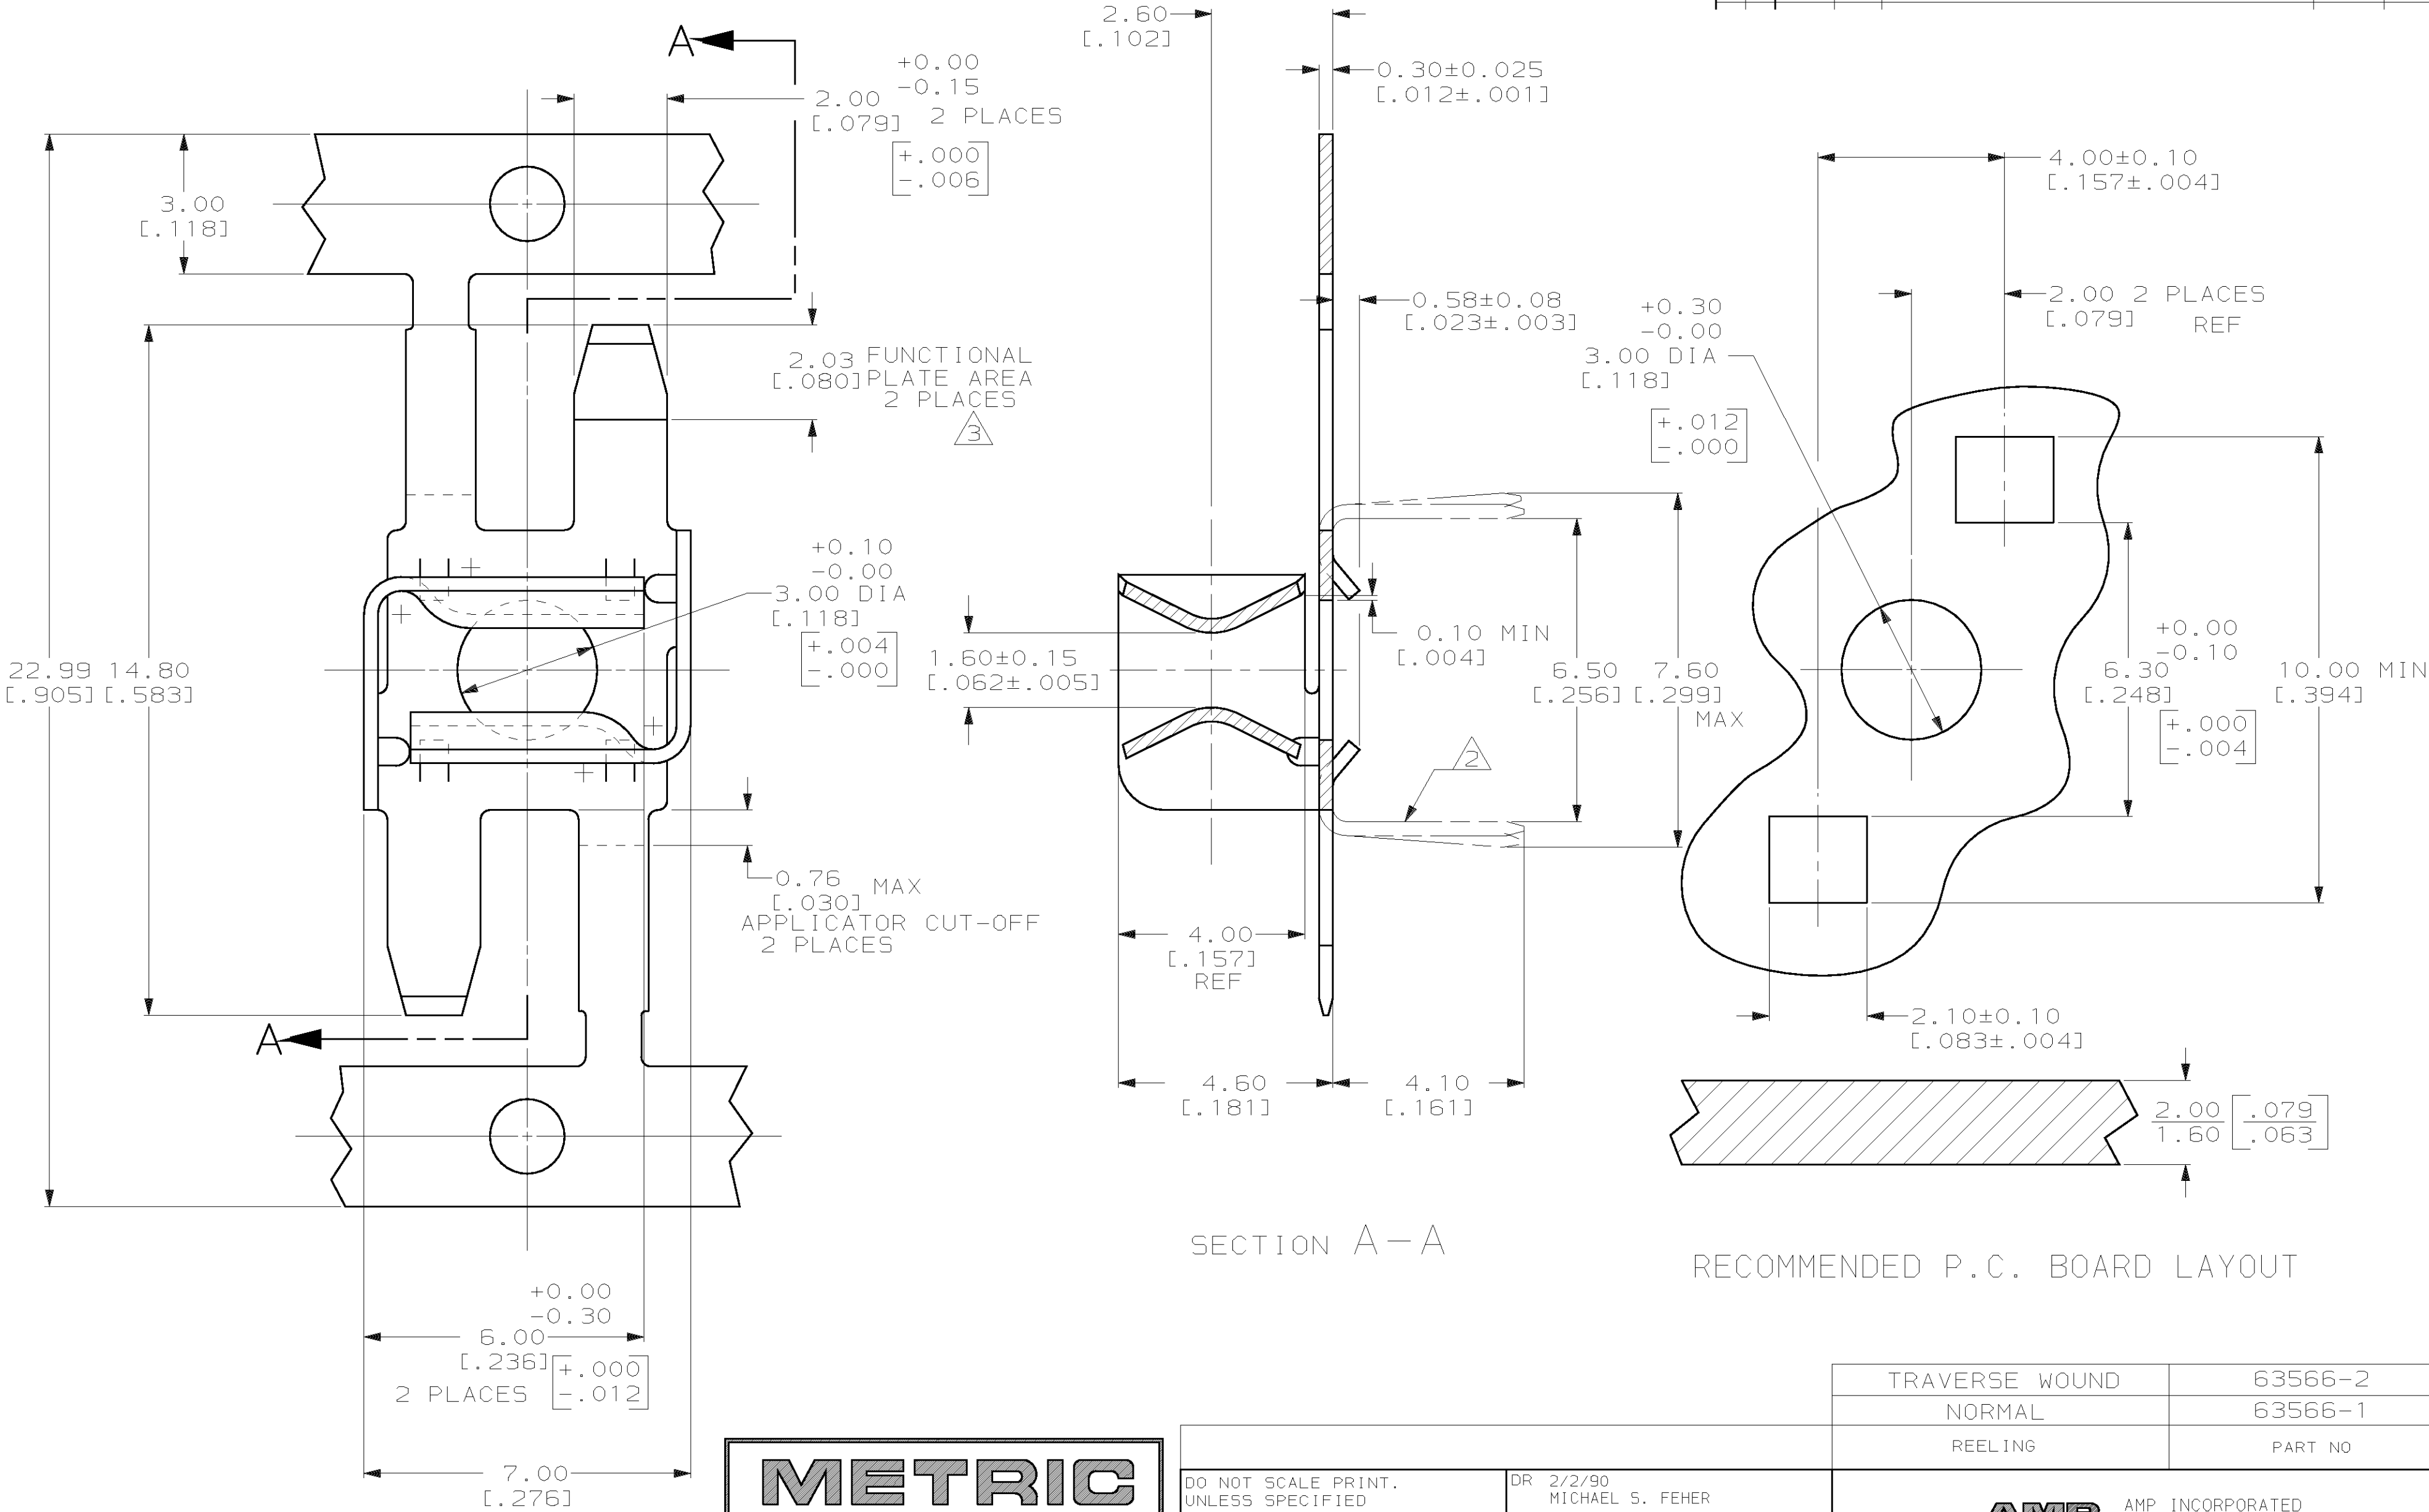

- 1 CONTINUOUS STRIP ON REELS.
- 2 TINES BENT 90° IN APPLICATOR PRIOR TO ASSEMBLY INTO P.C. BOARD.
- 3 0.00508 [0.000200] MIN TIN IN FUNCTIONAL PLATE AREA, 0.00254 [0.000100] MIN TIN ON REMAINDER.
- 4 PRODUCT COMPLIES WITH AMP SOLDERABILITY SPEC 109-11-5. WHEN PLATED AND 109-11-1 AFTER TWO YEARS OF SHELF LIFE

		REELING		PART NO			
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± 0.25 [.010] ANGLES ± 1°		DR 2/2/90 MICHAEL S. FEHER		AMP AMP INCORPORATED Harrisburg, Pa. 17105			
		CHK 2/5/90 JR RUTH					
		APPD 2/13/90 D. SCHWENK					
MATERIAL #4 HARD PHOSPHOR BRONZE		APPD 2/19/90 TERRY L. SHUTTER		NAME PIN RECEPTACLE, PRINTED CIRCUIT BOARD, 2.25[.088]-2.36[.093] DIA			
		PRODUCT SPEC -					
FINISH		APPLICATION SPEC -				SIZE C	
3		WEIGHT -				CAGE CODE 00779	
				DRAWING NO 63566			
				SCALE 10:1			
				SHEET 1 OF 1			