

## Overview


Polyphenylene sulphide (PPS) film capacitor for surface mounting. Encapsulation in self-extinguishing material meeting the requirements of UL 94 V-0.

## Applications

Typical applications include timing, filtering and use as a memory capacitor. The SMC Series is designed for high stability, accuracy and temperature. Not suitable for across-the-line application (see suppressor capacitors).

## Benefits

- Rated voltage: 50 – 400 VDC
- Rated voltage: 30 – 200 VAC
- Capacitance range: 0.001 – 3.3  $\mu$ F
- EIA size: 2220 – 6560
- Capacitance tolerance:  $\pm 2\%$ ,  $\pm 2.5\%$ ,  $\pm 5\%$
- Climatic category: 55/125/56
- RoHS Compliant and lead-free terminations
- Operating temperature range of  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$

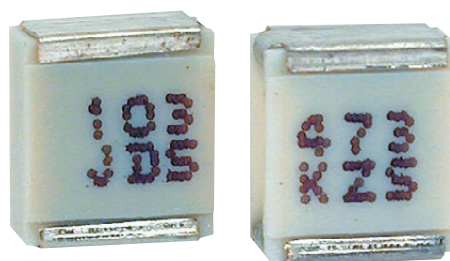

## Legacy Part Number System

| SMC            | 5.7                                | 102                                                                                                                                                 | J                                                 | 50                      | J31                 | TR12                       |
|----------------|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|-------------------------|---------------------|----------------------------|
| Series         | Chip Length (mm)                   | Capacitance Code (pF)                                                                                                                               | Capacitance Tolerance                             | Rated Voltage (VDC)     | Size Code           | Packaging Code             |
| Metallized PPS | 5.7<br>7.3<br>10.2<br>12.7<br>16.5 | First two digits indicate the two most significant digits of the capacitance value in picofarads. The third digit is the number of following zeros. | G = $\pm 2\%$<br>H = $\pm 2.5\%$<br>J = $\pm 5\%$ | 50<br>100<br>250<br>400 | See Dimension Table | See Ordering Options Table |


## New KEMET Part Number System

| F               | 125            | P                                                        | L                   | 102                                                                                                                                                 | J                                                 | 050                                             | V                          |
|-----------------|----------------|----------------------------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|-------------------------------------------------|----------------------------|
| Capacitor Class | Series         | Chip Size                                                | Size Code           | Capacitance Code (pF)                                                                                                                               | Capacitance Tolerance                             | Rated Voltage (VDC)                             | Packaging Code             |
| F = Film        | Metallized PPS | P = 2220<br>S = 2820<br>W = 4036<br>Y = 5045<br>Z = 6560 | See Dimension Table | First two digits indicate the two most significant digits of the capacitance value in picofarads. The third digit is the number of following zeros. | G = $\pm 2\%$<br>R = $\pm 2.5\%$<br>J = $\pm 5\%$ | 050 = 50<br>100 = 100<br>250 = 250<br>400 = 400 | See Ordering Options Table |

## Ordering Options Table

| Chip Size<br>(EIA) | Packaging Type                                     | KEMET<br>Packaging<br>Code | Legacy<br>Packaging<br>Code |
|--------------------|----------------------------------------------------|----------------------------|-----------------------------|
| 2220               | Standard Packaging Options                         |                            |                             |
|                    | Tape & Reel (Standard Reel)                        | V                          | TR12                        |
|                    | Bulk (Bag)                                         | A                          | BULK                        |
| 2824               | Standard Packaging Options                         |                            |                             |
|                    | Tape & Reel (Standard Reel)                        | V                          | TR12                        |
|                    | Bulk (Bag)                                         | A                          | BULK                        |
| 4036               | Standard Packaging Options                         |                            |                             |
|                    | Tape & Reel (Horizontal Orientation Standard Reel) | V                          | TR16                        |
|                    | Bulk (Bag)                                         | A                          | BULK                        |
|                    | Other Packaging Options                            |                            |                             |
|                    | Tape & Reel (Vertical Orientation Standard Reel)   | Y                          | TV24                        |
| 5045               | Standard Packaging Options                         |                            |                             |
|                    | Tape & Reel (Standard Reel)                        | V                          | TR24                        |
|                    | Bulk (Bag)                                         | A                          | BULK                        |
|                    | Other Packaging Options                            |                            |                             |
|                    | Tape & Reel (Vertical Orientation Standard Reel)   | Y                          | TV24                        |
| 6560               | Standard Packaging Options                         |                            |                             |
|                    | Tape & Reel (Standard Reel)                        | V                          | TR24                        |
|                    | Bulk (Bag)                                         | A                          | BULK                        |
|                    | Other Packaging Options                            |                            |                             |
|                    | Tape & Reel (Vertical Orientation Standard Reel)   | Y                          | TV44                        |

## Dimensions – Millimeters

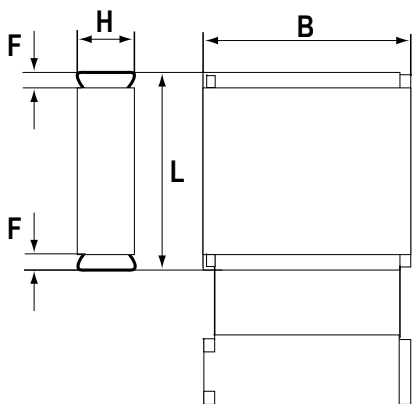

| KEMET<br>Size Code | Legacy<br>Size Code | Chip Size<br>(EIA) | B       |           | H       |           | L       |           | F       |           |
|--------------------|---------------------|--------------------|---------|-----------|---------|-----------|---------|-----------|---------|-----------|
|                    |                     |                    | Nominal | Tolerance | Nominal | Tolerance | Nominal | Tolerance | Nominal | Tolerance |
| PL                 | J31                 | 2220               | 5.0     | +/-0.2    | 2.5     | +/-0.2    | 5.7     | +/-0.2    | 0.5     | Nominal   |
| PP                 | J33                 | 2220               | 5.0     | +/-0.2    | 3.0     | +/-0.2    | 5.7     | +/-0.2    | 0.5     | Nominal   |
| PU                 | J35                 | 2220               | 5.0     | +/-0.2    | 4.0     | +/-0.2    | 5.7     | +/-0.2    | 0.5     | Nominal   |
| SG                 | K31                 | 2824               | 6.0     | +/-0.2    | 2.5     | +/-0.2    | 7.3     | +/-0.2    | 0.5     | Nominal   |
| SL                 | K33                 | 2824               | 6.0     | +/-0.2    | 3.0     | +/-0.2    | 7.3     | +/-0.2    | 0.5     | Nominal   |
| SP                 | K35                 | 2824               | 6.0     | +/-0.2    | 3.5     | +/-0.2    | 7.3     | +/-0.2    | 0.5     | Nominal   |
| ST                 | K37                 | 2824               | 6.0     | +/-0.2    | 4.5     | +/-0.2    | 7.3     | +/-0.2    | 0.5     | Nominal   |
| WP                 | A31                 | 4036               | 9.1     | +/-0.2    | 5.5     | +/-0.2    | 10.2    | +/-0.2    | 0.5     | Nominal   |
| YR                 | B31                 | 5045               | 11.5    | +/-0.2    | 6.5     | +/-0.2    | 12.7    | +/-0.2    | 0.5     | Nominal   |
| ZS                 | C31                 | 6560               | 15      | +/-0.2    | 7.0     | +/-0.2    | 16.5    | +/-0.2    | 0.5     | Nominal   |

## Environmental Compliance

All KEMET surface mount capacitors are RoHS Compliant.




RoHS Compliant


## Performance Characteristics

|                            |                                                                                                                                                                                                                            |             |                |                |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------------|----------------|
| Rated Voltage (VDC)        | 50                                                                                                                                                                                                                         | 100         | 250            | 400            |
| Rated Voltage (VAC)        | 30                                                                                                                                                                                                                         | 63          | 160            | 200            |
| Capacitance Range (μF)     | 0.001 – 3.3                                                                                                                                                                                                                | 0.001 – 1.5 | 0.001 – 0.47   | 0.001 – 0.22   |
| Chip Size (EIA)            | 2220 – 6560                                                                                                                                                                                                                |             |                |                |
| Capacitance Tolerance      | ±2%, ±2.5%, ±5%                                                                                                                                                                                                            |             |                |                |
| Category Temperature Range | -55°C to +125°C                                                                                                                                                                                                            |             |                |                |
| Rated Temperature          | +100°C                                                                                                                                                                                                                     |             |                |                |
| Voltage Derating           | The rated voltage should be decreased with 1.25%/°C from +100°C to +125°C and 1.5%/°C from +125°C to 175°C                                                                                                                 |             |                |                |
| Climatic Category          | 55/125/56                                                                                                                                                                                                                  |             |                |                |
| Test Voltage               | 1.6 x V <sub>R</sub> , 60 seconds                                                                                                                                                                                          |             |                |                |
| Insulation Resistance      | Measured at +20°C According to IEC 60384–19                                                                                                                                                                                |             |                |                |
|                            | Minimum Value Between Terminals                                                                                                                                                                                            |             |                |                |
|                            |                                                                                                                                                                                                                            | C ≤ 0.33 μF |                | C > 0.33 μF    |
|                            | V <sub>R</sub> ≤ 100                                                                                                                                                                                                       | 15,000 MΩ   |                | 5,000 MΩ • μF  |
|                            | V <sub>R</sub> > 100                                                                                                                                                                                                       | 30,000 MΩ   |                | 10,000 MΩ • μF |
| Dissipation Factor         | Maximum Values at +23°C                                                                                                                                                                                                    |             |                |                |
|                            |                                                                                                                                                                                                                            | C ≤ 0.1 μF  | 0.1 < C ≤ 1 μF | C > 1 μF       |
|                            | 1 kHz                                                                                                                                                                                                                      | 0.15%       | 0.15%          | 0.15%          |
|                            | 10 kHz                                                                                                                                                                                                                     | 0.25%       | 0.25%          | 0.30%          |
|                            | 100 kHz                                                                                                                                                                                                                    | 0.50%       | 0.60%          |                |
| Pulse Rise Time            | The capacitors can withstand an unlimited number of pulses with a dV/dt according to Table 1. For voltages (V) lower than the rated voltage (V <sub>R</sub> ), the specified dV/dt can be multiplied by V <sub>R</sub> /V. |             |                |                |

### Capacitance vs. Temperature

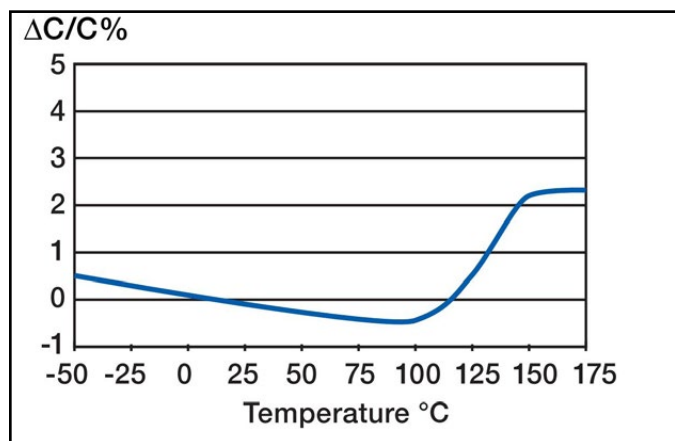

### Dissipation Factor vs. Temperature

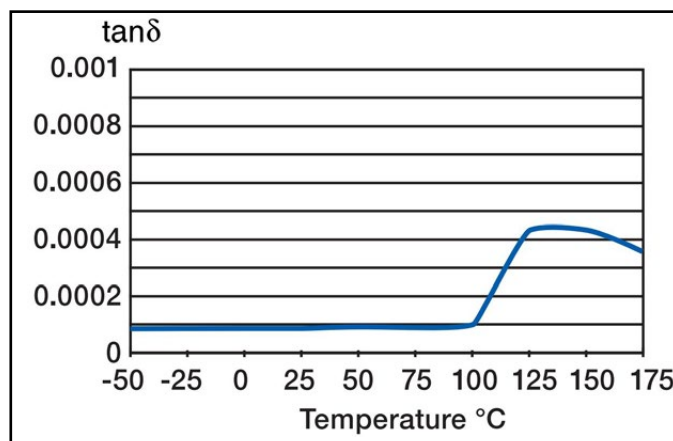

**Table 1 – Ratings & Part Number Reference**

| VDC | VAC | Capacitance Value (µF) | Size Code (New/Legacy) | Dimensions in mm |        |        | Chip Size | dV/dt (V/µs) | New KEMET Part Number | Legacy Part Number    |
|-----|-----|------------------------|------------------------|------------------|--------|--------|-----------|--------------|-----------------------|-----------------------|
|     |     |                        |                        | B                | H      | L      |           |              |                       |                       |
| 50  | 30  | 0.0010                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL102(1)050(2)    | SMC5.7102(1)50J31(2)  |
| 50  | 30  | 0.0012                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL122(1)050(2)    | SMC5.7122(1)50J31(2)  |
| 50  | 30  | 0.0015                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL152(1)050(2)    | SMC5.7152(1)50J31(2)  |
| 50  | 30  | 0.0018                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL182(1)050(2)    | SMC5.7182(1)50J31(2)  |
| 50  | 30  | 0.0022                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL222(1)050(2)    | SMC5.7222(1)50J31(2)  |
| 50  | 30  | 0.0027                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL272(1)050(2)    | SMC5.7272(1)50J31(2)  |
| 50  | 30  | 0.0033                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL332(1)050(2)    | SMC5.7332(1)50J31(2)  |
| 50  | 30  | 0.0039                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL392(1)050(2)    | SMC5.7392(1)50J31(2)  |
| 50  | 30  | 0.0047                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL472(1)050(2)    | SMC5.7472(1)50J31(2)  |
| 50  | 30  | 0.0056                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL562(1)050(2)    | SMC5.7562(1)50J31(2)  |
| 50  | 30  | 0.0068                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL682(1)050(2)    | SMC5.7682(1)50J31(2)  |
| 50  | 30  | 0.0082                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL822(1)050(2)    | SMC5.7822(1)50J31(2)  |
| 50  | 30  | 0.010                  | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL103(1)050(2)    | SMC5.7103(1)50J31(2)  |
| 50  | 30  | 0.012                  | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL123(1)050(2)    | SMC5.7123(1)50J31(2)  |
| 50  | 30  | 0.015                  | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 15           | F125PL153(1)050(2)    | SMC5.7153(1)50J31(2)  |
| 50  | 30  | 0.018                  | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 15           | F125PL183(1)050(2)    | SMC5.7183(1)50J31(2)  |
| 50  | 30  | 0.022                  | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 15           | F125PL223(1)050(2)    | SMC5.7223(1)50J31(2)  |
| 50  | 30  | 0.027                  | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 15           | F125PL273(1)050(2)    | SMC5.7273(1)50J31(2)  |
| 50  | 30  | 0.033                  | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 15           | F125PL333(1)050(2)    | SMC5.7333(1)50J31(2)  |
| 50  | 30  | 0.039                  | PP/J33                 | 5.0              | 3.0    | 5.7    | 2220      | 6            | F125PP393(1)050(2)    | SMC5.7393(1)50J33(2)  |
| 50  | 30  | 0.047                  | PP/J33                 | 5.0              | 3.0    | 5.7    | 2220      | 6            | F125PP473(1)050(2)    | SMC5.7473(1)50J33(2)  |
| 50  | 30  | 0.056                  | PU/J35                 | 5.0              | 4.0    | 5.7    | 2220      | 6            | F125PU563(1)050(2)    | SMC5.7563(1)50J35(2)  |
| 50  | 30  | 0.068                  | PU/J35                 | 5.0              | 4.0    | 5.7    | 2220      | 6            | F125PU683(1)050(2)    | SMC5.7683(1)50J35(2)  |
| 50  | 30  | 0.082                  | PU/J35                 | 5.0              | 4.0    | 5.7    | 2220      | 6            | F125PU823(1)050(2)    | SMC5.7823(1)50J35(2)  |
| 50  | 30  | 0.10                   | PU/J35                 | 5.0              | 4.0    | 5.7    | 2220      | 6            | F125PU104(1)050(2)    | SMC5.7104(1)50J35(2)  |
| 50  | 30  | 0.0010                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG102(1)050(2)    | SMC7.3102(1)50K31(2)  |
| 50  | 30  | 0.0012                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG122(1)050(2)    | SMC7.3122(1)50K31(2)  |
| 50  | 30  | 0.0015                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG152(1)050(2)    | SMC7.3152(1)50K31(2)  |
| 50  | 30  | 0.0018                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG182(1)050(2)    | SMC7.3182(1)50K31(2)  |
| 50  | 30  | 0.0022                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG222(1)050(2)    | SMC7.3222(1)50K31(2)  |
| 50  | 30  | 0.0027                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG272(1)050(2)    | SMC7.3272(1)50K31(2)  |
| 50  | 30  | 0.0033                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG332(1)050(2)    | SMC7.3332(1)50K31(2)  |
| 50  | 30  | 0.0039                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG392(1)050(2)    | SMC7.3392(1)50K31(2)  |
| 50  | 30  | 0.0047                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG472(1)050(2)    | SMC7.3472(1)50K31(2)  |
| 50  | 30  | 0.0056                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG562(1)050(2)    | SMC7.3562(1)50K31(2)  |
| 50  | 30  | 0.0068                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG682(1)050(2)    | SMC7.3682(1)50K31(2)  |
| 50  | 30  | 0.0082                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG822(1)050(2)    | SMC7.3822(1)50K31(2)  |
| 50  | 30  | 0.010                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG103(1)050(2)    | SMC7.3103(1)50K31(2)  |
| 50  | 30  | 0.012                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG123(1)050(2)    | SMC7.3123(1)50K31(2)  |
| 50  | 30  | 0.015                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG153(1)050(2)    | SMC7.3153(1)50K31(2)  |
| 50  | 30  | 0.018                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG183(1)050(2)    | SMC7.3183(1)50K31(2)  |
| 50  | 30  | 0.022                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG223(1)050(2)    | SMC7.3223(1)50K31(2)  |
| 50  | 30  | 0.027                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG273(1)050(2)    | SMC7.3273(1)50K31(2)  |
| 50  | 30  | 0.033                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 15           | F125SG333(1)050(2)    | SMC7.3333(1)50K31(2)  |
| 50  | 30  | 0.039                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 15           | F125SG393(1)050(2)    | SMC7.3393(1)50K31(2)  |
| 50  | 30  | 0.047                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 15           | F125SG473(1)050(2)    | SMC7.3473(1)50K31(2)  |
| 50  | 30  | 0.056                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 15           | F125SG563(1)050(2)    | SMC7.3563(1)50K31(2)  |
| 50  | 30  | 0.068                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 15           | F125SG683(1)050(2)    | SMC7.3683(1)50K31(2)  |
| 50  | 30  | 0.082                  | SL/K33                 | 6.0              | 3.0    | 7.3    | 2824      | 6            | F125SL823(1)050(2)    | SMC7.3823(1)50K33(2)  |
| 50  | 30  | 0.10                   | SL/K33                 | 6.0              | 3.0    | 7.3    | 2824      | 6            | F125SL104(1)050(2)    | SMC7.3104(1)50K33(2)  |
| 50  | 30  | 0.12                   | SP/K35                 | 6.0              | 3.5    | 7.3    | 2824      | 6            | F125SP124(1)050(2)    | SMC7.3124(1)50K35(2)  |
| 50  | 30  | 0.15                   | SP/K35                 | 6.0              | 3.5    | 7.3    | 2824      | 6            | F125SP154(1)050(2)    | SMC7.3154(1)50K35(2)  |
| 50  | 30  | 0.18                   | SP/K35                 | 6.0              | 3.5    | 7.3    | 2824      | 6            | F125SP184(1)050(2)    | SMC7.3184(1)50K35(2)  |
| 50  | 30  | 0.22                   | ST/K37                 | 6.0              | 4.5    | 7.3    | 2824      | 6            | F125ST224(1)050(2)    | SMC7.3224(1)50K37(2)  |
| 50  | 30  | 0.010                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP103(1)050(2)    | SMC10.2103(1)50A31(2) |
| 50  | 30  | 0.012                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP123(1)050(2)    | SMC10.2123(1)50A31(2) |
| 50  | 30  | 0.015                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP153(1)050(2)    | SMC10.2153(1)50A31(2) |
| 50  | 30  | 0.018                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP183(1)050(2)    | SMC10.2183(1)50A31(2) |
| 50  | 30  | 0.022                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP223(1)050(2)    | SMC10.2223(1)50A31(2) |
| VDC | VAC | Capacitance Value (µF) | Size Code (New/Legacy) | B (mm)           | H (mm) | L (mm) | Chip Size | dV/dt (V/µs) | New KEMET Part Number | Legacy Part Number    |

(1) G = ±2%, R = ±2.5% (Legacy code = H), J = ±5%.

(2) Insert ordering code for lead type and packaging. See Ordering Options Table for available options.

**Table 1 – Ratings & Part Number Reference cont'd**

| VDC | VAC | Capacitance Value (µF) | Size Code (New/Legacy) | Dimensions in mm |        |        | Chip Size | dV/dt (V/µs) | New KEMET Part Number | Legacy Part Number    |
|-----|-----|------------------------|------------------------|------------------|--------|--------|-----------|--------------|-----------------------|-----------------------|
|     |     |                        |                        | B                | H      | L      |           |              |                       |                       |
| 50  | 30  | 0.027                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP273(1)050(2)    | SMC10.2273(1)50A31(2) |
| 50  | 30  | 0.033                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP333(1)050(2)    | SMC10.2333(1)50A31(2) |
| 50  | 30  | 0.039                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP393(1)050(2)    | SMC10.2393(1)50A31(2) |
| 50  | 30  | 0.047                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP473(1)050(2)    | SMC10.2473(1)50A31(2) |
| 50  | 30  | 0.056                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP563(1)050(2)    | SMC10.2563(1)50A31(2) |
| 50  | 30  | 0.068                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP683(1)050(2)    | SMC10.2683(1)50A31(2) |
| 50  | 30  | 0.082                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP823(1)050(2)    | SMC10.2823(1)50A31(2) |
| 50  | 30  | 0.10                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP104(1)050(2)    | SMC10.2104(1)50A31(2) |
| 50  | 30  | 0.12                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP124(1)050(2)    | SMC10.2124(1)50A31(2) |
| 50  | 30  | 0.15                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP154(1)050(2)    | SMC10.2154(1)50A31(2) |
| 50  | 30  | 0.18                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP184(1)050(2)    | SMC10.2184(1)50A31(2) |
| 50  | 30  | 0.22                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP224(1)050(2)    | SMC10.2224(1)50A31(2) |
| 50  | 30  | 0.27                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP274(1)050(2)    | SMC10.2274(1)50A31(2) |
| 50  | 30  | 0.33                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP334(1)050(2)    | SMC10.2334(1)50A31(2) |
| 50  | 30  | 0.39                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP394(1)050(2)    | SMC10.2394(1)50A31(2) |
| 50  | 30  | 0.47                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP474(1)050(2)    | SMC10.2474(1)50A31(2) |
| 50  | 30  | 0.56                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP564(1)050(2)    | SMC10.2564(1)50A31(2) |
| 50  | 30  | 0.68                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP684(1)050(2)    | SMC10.2684(1)50A31(2) |
| 50  | 30  | 0.82                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 4            | F125WP824(1)050(2)    | SMC10.2824(1)50A31(2) |
| 50  | 30  | 1.0                    | YR/B31                 | 11.5             | 6.5    | 12.7   | 5045      | 3            | F125YR105(1)050(2)    | SMC12.7105(1)50B31(2) |
| 50  | 30  | 1.2                    | YR/B31                 | 11.5             | 6.5    | 12.7   | 5045      | 3            | F125YR125(1)050(2)    | SMC12.7125(1)50B31(2) |
| 50  | 30  | 1.5                    | YR/B31                 | 11.5             | 6.5    | 12.7   | 5045      | 3            | F125YR155(1)050(2)    | SMC12.7155(1)50B31(2) |
| 50  | 30  | 1.8                    | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 2            | F125ZS185(1)050(2)    | SMC16.5185(1)50C31(2) |
| 50  | 30  | 2.2                    | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 2            | F125ZS225(1)050(2)    | SMC16.5225(1)50C31(2) |
| 50  | 30  | 2.7                    | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 2            | F125ZS275(1)050(2)    | SMC16.5275(1)50C31(2) |
| 50  | 30  | 3.3                    | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 2            | F125ZS335(1)050(2)    | SMC16.5335(1)50C31(2) |
| 100 | 63  | 0.0010                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL102(1)100(2)    | SMC5.7102(1)100J31(2) |
| 100 | 63  | 0.0012                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL122(1)100(2)    | SMC5.7122(1)100J31(2) |
| 100 | 63  | 0.0015                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL152(1)100(2)    | SMC5.7152(1)100J31(2) |
| 100 | 63  | 0.0018                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL182(1)100(2)    | SMC5.7182(1)100J31(2) |
| 100 | 63  | 0.0022                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL222(1)100(2)    | SMC5.7222(1)100J31(2) |
| 100 | 63  | 0.0027                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL272(1)100(2)    | SMC5.7272(1)100J31(2) |
| 100 | 63  | 0.0033                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL332(1)100(2)    | SMC5.7332(1)100J31(2) |
| 100 | 63  | 0.0039                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL392(1)100(2)    | SMC5.7392(1)100J31(2) |
| 100 | 63  | 0.0047                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL472(1)100(2)    | SMC5.7472(1)100J31(2) |
| 100 | 63  | 0.0056                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL562(1)100(2)    | SMC5.7562(1)100J31(2) |
| 100 | 63  | 0.0068                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL682(1)100(2)    | SMC5.7682(1)100J31(2) |
| 100 | 63  | 0.0082                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL822(1)100(2)    | SMC5.7822(1)100J31(2) |
| 100 | 63  | 0.010                  | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL103(1)100(2)    | SMC5.7103(1)100J31(2) |
| 100 | 63  | 0.012                  | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL123(1)100(2)    | SMC5.7123(1)100J31(2) |
| 100 | 63  | 0.015                  | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 15           | F125PL153(1)100(2)    | SMC5.7153(1)100J31(2) |
| 100 | 63  | 0.018                  | PP/J33                 | 5.0              | 3.0    | 5.7    | 2220      | 15           | F125PP183(1)100(2)    | SMC5.7183(1)100J33(2) |
| 100 | 63  | 0.022                  | PP/J33                 | 5.0              | 3.0    | 5.7    | 2220      | 15           | F125PP223(1)100(2)    | SMC5.7223(1)100J33(2) |
| 100 | 63  | 0.027                  | PU/J35                 | 5.0              | 4.0    | 5.7    | 2220      | 15           | F125PU273(1)100(2)    | SMC5.7273(1)100J35(2) |
| 100 | 63  | 0.033                  | PU/J35                 | 5.0              | 4.0    | 5.7    | 2220      | 15           | F125PU333(1)100(2)    | SMC5.7333(1)100J35(2) |
| 100 | 63  | 0.0010                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG102(1)100(2)    | SMC7.3102(1)100K31(2) |
| 100 | 63  | 0.0012                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG122(1)100(2)    | SMC7.3122(1)100K31(2) |
| 100 | 63  | 0.0015                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG152(1)100(2)    | SMC7.3152(1)100K31(2) |
| 100 | 63  | 0.0018                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG182(1)100(2)    | SMC7.3182(1)100K31(2) |
| 100 | 63  | 0.0022                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG222(1)100(2)    | SMC7.3222(1)100K31(2) |
| 100 | 63  | 0.0027                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG272(1)100(2)    | SMC7.3272(1)100K31(2) |
| 100 | 63  | 0.0033                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG332(1)100(2)    | SMC7.3332(1)100K31(2) |
| 100 | 63  | 0.0039                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG392(1)100(2)    | SMC7.3392(1)100K31(2) |
| 100 | 63  | 0.0047                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG472(1)100(2)    | SMC7.3472(1)100K31(2) |
| 100 | 63  | 0.0056                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG562(1)100(2)    | SMC7.3562(1)100K31(2) |
| 100 | 63  | 0.0068                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG682(1)100(2)    | SMC7.3682(1)100K31(2) |
| 100 | 63  | 0.0082                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG822(1)100(2)    | SMC7.3822(1)100K31(2) |
| 100 | 63  | 0.010                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG103(1)100(2)    | SMC7.3103(1)100K31(2) |
| 100 | 63  | 0.012                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG123(1)100(2)    | SMC7.3123(1)100K31(2) |
| VDC | VAC | Capacitance Value (µF) | Size Code (New/Legacy) | B (mm)           | H (mm) | L (mm) | Chip Size | dV/dt (V/µs) | New KEMET Part Number | Legacy Part Number    |

(1) G = ±2%, R = ±2.5% (Legacy code = H), J = ±5%.

(2) Insert ordering code for lead type and packaging. See Ordering Options Table for available options.

**Table 1 – Ratings & Part Number Reference cont'd**

| VDC | VAC | Capacitance Value (µF) | Size Code (New/Legacy) | Dimensions in mm |        |        | Chip Size | dV/dt (V/µs) | New KEMET Part Number | Legacy Part Number     |
|-----|-----|------------------------|------------------------|------------------|--------|--------|-----------|--------------|-----------------------|------------------------|
|     |     |                        |                        | B                | H      | L      |           |              |                       |                        |
| 100 | 63  | 0.015                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG153(1)100(2)    | SMC7.3153(1)100K31(2)  |
| 100 | 63  | 0.018                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG183(1)100(2)    | SMC7.3183(1)100K31(2)  |
| 100 | 63  | 0.022                  | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG223(1)100(2)    | SMC7.3223(1)100K31(2)  |
| 100 | 63  | 0.027                  | SL/K33                 | 6.0              | 3.0    | 7.3    | 2824      | 15           | F125SL273(1)100(2)    | SMC7.3273(1)100K33(2)  |
| 100 | 63  | 0.033                  | SL/K33                 | 6.0              | 3.0    | 7.3    | 2824      | 15           | F125SL333(1)100(2)    | SMC7.3333(1)100K33(2)  |
| 100 | 63  | 0.039                  | SP/K35                 | 6.0              | 3.5    | 7.3    | 2824      | 15           | F125SP393(1)100(2)    | SMC7.3393(1)100K35(2)  |
| 100 | 63  | 0.047                  | SP/K35                 | 6.0              | 3.5    | 7.3    | 2824      | 15           | F125SP473(1)100(2)    | SMC7.3473(1)100K35(2)  |
| 100 | 63  | 0.056                  | ST/K37                 | 6.0              | 4.5    | 7.3    | 2824      | 15           | F125ST563(1)100(2)    | SMC7.3563(1)100K37(2)  |
| 100 | 63  | 0.068                  | ST/K37                 | 6.0              | 4.5    | 7.3    | 2824      | 15           | F125ST683(1)100(2)    | SMC7.3683(1)100K37(2)  |
| 100 | 63  | 0.010                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP103(1)100(2)    | SMC10.2103(1)100A31(2) |
| 100 | 63  | 0.012                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP123(1)100(2)    | SMC10.2123(1)100A31(2) |
| 100 | 63  | 0.015                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP153(1)100(2)    | SMC10.2153(1)100A31(2) |
| 100 | 63  | 0.018                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP183(1)100(2)    | SMC10.2183(1)100A31(2) |
| 100 | 63  | 0.022                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP223(1)100(2)    | SMC10.2223(1)100A31(2) |
| 100 | 63  | 0.027                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP273(1)100(2)    | SMC10.2273(1)100A31(2) |
| 100 | 63  | 0.033                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP333(1)100(2)    | SMC10.2333(1)100A31(2) |
| 100 | 63  | 0.039                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP393(1)100(2)    | SMC10.2393(1)100A31(2) |
| 100 | 63  | 0.047                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP473(1)100(2)    | SMC10.2473(1)100A31(2) |
| 100 | 63  | 0.056                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP563(1)100(2)    | SMC10.2563(1)100A31(2) |
| 100 | 63  | 0.068                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP683(1)100(2)    | SMC10.2683(1)100A31(2) |
| 100 | 63  | 0.082                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP823(1)100(2)    | SMC10.2823(1)100A31(2) |
| 100 | 63  | 0.10                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP104(1)100(2)    | SMC10.2104(1)100A31(2) |
| 100 | 63  | 0.12                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP124(1)100(2)    | SMC10.2124(1)100A31(2) |
| 100 | 63  | 0.15                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP154(1)100(2)    | SMC10.2154(1)100A31(2) |
| 100 | 63  | 0.18                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP184(1)100(2)    | SMC10.2184(1)100A31(2) |
| 100 | 63  | 0.22                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP224(1)100(2)    | SMC10.2224(1)100A31(2) |
| 100 | 63  | 0.27                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 6            | F125WP274(1)100(2)    | SMC10.2274(1)100A31(2) |
| 100 | 63  | 0.33                   | YR/B31                 | 11.5             | 6.5    | 12.7   | 5045      | 5            | F125YR334(1)100(2)    | SMC12.7334(1)100B31(2) |
| 100 | 63  | 0.39                   | YR/B31                 | 11.5             | 6.5    | 12.7   | 5045      | 5            | F125YR394(1)100(2)    | SMC12.7394(1)100B31(2) |
| 100 | 63  | 0.47                   | YR/B31                 | 11.5             | 6.5    | 12.7   | 5045      | 5            | F125YR474(1)100(2)    | SMC12.7474(1)100B31(2) |
| 100 | 63  | 0.56                   | YR/B31                 | 11.5             | 6.5    | 12.7   | 5045      | 5            | F125YR564(1)100(2)    | SMC12.7564(1)100B31(2) |
| 100 | 63  | 0.68                   | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 3            | F125ZS684(1)100(2)    | SMC16.5684(1)100C31(2) |
| 100 | 63  | 0.82                   | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 3            | F125ZS824(1)100(2)    | SMC16.5824(1)100C31(2) |
| 100 | 63  | 1.0                    | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 3            | F125ZS105(1)100(2)    | SMC16.5105(1)100C31(2) |
| 100 | 63  | 1.2                    | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 3            | F125ZS125(1)100(2)    | SMC16.5125(1)100C31(2) |
| 100 | 63  | 1.5                    | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 3            | F125ZS155(1)100(2)    | SMC16.5155(1)100C31(2) |
| 250 | 160 | 0.0010                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL102(1)250(2)    | SMC5.7102(1)250J31(2)  |
| 250 | 160 | 0.0012                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL122(1)250(2)    | SMC5.7122(1)250J31(2)  |
| 250 | 160 | 0.0015                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL152(1)250(2)    | SMC5.7152(1)250J31(2)  |
| 250 | 160 | 0.0018                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL182(1)250(2)    | SMC5.7182(1)250J31(2)  |
| 250 | 160 | 0.0022                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL222(1)250(2)    | SMC5.7222(1)250J31(2)  |
| 250 | 160 | 0.0027                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL272(1)250(2)    | SMC5.7272(1)250J31(2)  |
| 250 | 160 | 0.0033                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL332(1)250(2)    | SMC5.7332(1)250J31(2)  |
| 250 | 160 | 0.0039                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL392(1)250(2)    | SMC5.7392(1)250J31(2)  |
| 250 | 160 | 0.0047                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 20           | F125PL472(1)250(2)    | SMC5.7472(1)250J31(2)  |
| 250 | 160 | 0.0056                 | PP/J33                 | 5.0              | 3.0    | 5.7    | 2220      | 20           | F125PP562(1)250(2)    | SMC5.7562(1)250J33(2)  |
| 250 | 160 | 0.0068                 | PP/J33                 | 5.0              | 3.0    | 5.7    | 2220      | 20           | F125PP682(1)250(2)    | SMC5.7682(1)250J33(2)  |
| 250 | 160 | 0.0082                 | PU/J35                 | 5.0              | 4.0    | 5.7    | 2220      | 20           | F125PU822(1)250(2)    | SMC5.7822(1)250J35(2)  |
| 250 | 160 | 0.010                  | PU/J35                 | 5.0              | 4.0    | 5.7    | 2220      | 20           | F125PU103(1)250(2)    | SMC5.7103(1)250J35(2)  |
| 250 | 160 | 0.0010                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG102(1)250(2)    | SMC7.3102(1)250K31(2)  |
| 250 | 160 | 0.0012                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG122(1)250(2)    | SMC7.3122(1)250K31(2)  |
| 250 | 160 | 0.0015                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG152(1)250(2)    | SMC7.3152(1)250K31(2)  |
| 250 | 160 | 0.0018                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG182(1)250(2)    | SMC7.3182(1)250K31(2)  |
| 250 | 160 | 0.0022                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG222(1)250(2)    | SMC7.3222(1)250K31(2)  |
| 250 | 160 | 0.0027                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG272(1)250(2)    | SMC7.3272(1)250K31(2)  |
| 250 | 160 | 0.0033                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG332(1)250(2)    | SMC7.3332(1)250K31(2)  |
| 250 | 160 | 0.0039                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG392(1)250(2)    | SMC7.3392(1)250K31(2)  |
| 250 | 160 | 0.0047                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG472(1)250(2)    | SMC7.3472(1)250K31(2)  |
| 250 | 160 | 0.0056                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG562(1)250(2)    | SMC7.3562(1)250K31(2)  |
| VDC | VAC | Capacitance Value (µF) | Size Code (New/Legacy) | B (mm)           | H (mm) | L (mm) | Chip Size | dV/dt (V/µs) | New KEMET Part Number | Legacy Part Number     |

(1) G = ±2%, R = ±2.5% (Legacy code = H), J = ±5%.

(2) Insert ordering code for lead type and packaging. See Ordering Options Table for available options.

**Table 1 – Ratings & Part Number Reference cont'd**

| VDC | VAC | Capacitance Value (µF) | Size Code (New/Legacy) | Dimensions in mm |        |        | Chip Size | dV/dt (V/µs) | New KEMET Part Number | Legacy Part Number     |
|-----|-----|------------------------|------------------------|------------------|--------|--------|-----------|--------------|-----------------------|------------------------|
|     |     |                        |                        | B                | H      | L      |           |              |                       |                        |
| 250 | 160 | 0.0068                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG682(1)250(2)    | SMC7.3682(1)250K31(2)  |
| 250 | 160 | 0.0082                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 20           | F125SG822(1)250(2)    | SMC7.3822(1)250K31(2)  |
| 250 | 160 | 0.010                  | SL/K33                 | 6.0              | 3.0    | 7.3    | 2824      | 20           | F125SL103(1)250(2)    | SMC7.3103(1)250K33(2)  |
| 250 | 160 | 0.012                  | SL/K33                 | 6.0              | 3.0    | 7.3    | 2824      | 20           | F125SL123(1)250(2)    | SMC7.3123(1)250K33(2)  |
| 250 | 160 | 0.015                  | SL/K33                 | 6.0              | 3.0    | 7.3    | 2824      | 20           | F125SL153(1)250(2)    | SMC7.3153(1)250K33(2)  |
| 250 | 160 | 0.018                  | SP/K35                 | 6.0              | 3.5    | 7.3    | 2824      | 20           | F125SP183(1)250(2)    | SMC7.3183(1)250K35(2)  |
| 250 | 160 | 0.022                  | SP/K35                 | 6.0              | 3.5    | 7.3    | 2824      | 20           | F125SP223(1)250(2)    | SMC7.3223(1)250K35(2)  |
| 250 | 160 | 0.010                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 10           | F125WP103(1)250(2)    | SMC10.2103(1)250A31(2) |
| 250 | 160 | 0.012                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 10           | F125WP123(1)250(2)    | SMC10.2123(1)250A31(2) |
| 250 | 160 | 0.015                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 10           | F125WP153(1)250(2)    | SMC10.2153(1)250A31(2) |
| 250 | 160 | 0.018                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 10           | F125WP183(1)250(2)    | SMC10.2183(1)250A31(2) |
| 250 | 160 | 0.022                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 10           | F125WP223(1)250(2)    | SMC10.2223(1)250A31(2) |
| 250 | 160 | 0.027                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 10           | F125WP273(1)250(2)    | SMC10.2273(1)250A31(2) |
| 250 | 160 | 0.033                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 10           | F125WP333(1)250(2)    | SMC10.2333(1)250A31(2) |
| 250 | 160 | 0.039                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 10           | F125WP393(1)250(2)    | SMC10.2393(1)250A31(2) |
| 250 | 160 | 0.047                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 10           | F125WP473(1)250(2)    | SMC10.2473(1)250A31(2) |
| 250 | 160 | 0.056                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 10           | F125WP563(1)250(2)    | SMC10.2563(1)250A31(2) |
| 250 | 160 | 0.068                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 10           | F125WP683(1)250(2)    | SMC10.2683(1)250A31(2) |
| 250 | 160 | 0.082                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 10           | F125WP823(1)250(2)    | SMC10.2823(1)250A31(2) |
| 250 | 160 | 0.10                   | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 10           | F125WP104(1)250(2)    | SMC10.2104(1)250A31(2) |
| 250 | 160 | 0.12                   | YR/B31                 | 11.5             | 6.5    | 12.7   | 5045      | 8            | F125YR124(1)250(2)    | SMC12.7124(1)250B31(2) |
| 250 | 160 | 0.15                   | YR/B31                 | 11.5             | 6.5    | 12.7   | 5045      | 8            | F125YR154(1)250(2)    | SMC12.7154(1)250B31(2) |
| 250 | 160 | 0.18                   | YR/B31                 | 11.5             | 6.5    | 12.7   | 5045      | 8            | F125YR184(1)250(2)    | SMC12.7184(1)250B31(2) |
| 250 | 160 | 0.22                   | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 5            | F125ZS224(1)250(2)    | SMC16.5224(1)250C31(2) |
| 250 | 160 | 0.27                   | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 5            | F125ZS274(1)250(2)    | SMC16.5274(1)250C31(2) |
| 250 | 160 | 0.33                   | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 5            | F125ZS334(1)250(2)    | SMC16.5334(1)250C31(2) |
| 250 | 160 | 0.39                   | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 5            | F125ZS394(1)250(2)    | SMC16.5394(1)250C31(2) |
| 250 | 160 | 0.47                   | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 5            | F125ZS474(1)250(2)    | SMC16.5474(1)250C31(2) |
| 400 | 200 | 0.0010                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 40           | F125PL102(1)400(2)    | SMC5.7102(1)400J31(2)  |
| 400 | 200 | 0.0012                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 40           | F125PL122(1)400(2)    | SMC5.7122(1)400J31(2)  |
| 400 | 200 | 0.0015                 | PL/J31                 | 5.0              | 2.5    | 5.7    | 2220      | 40           | F125PL152(1)400(2)    | SMC5.7152(1)400J31(2)  |
| 400 | 200 | 0.0018                 | PP/J33                 | 5.0              | 3.0    | 5.7    | 2220      | 40           | F125PP182(1)400(2)    | SMC5.7182(1)400J33(2)  |
| 400 | 200 | 0.0022                 | PP/J33                 | 5.0              | 3.0    | 5.7    | 2220      | 40           | F125PP222(1)400(2)    | SMC5.7222(1)400J33(2)  |
| 400 | 200 | 0.0027                 | PU/J35                 | 5.0              | 4.0    | 5.7    | 2220      | 40           | F125PU272(1)400(2)    | SMC5.7272(1)400J35(2)  |
| 400 | 200 | 0.0033                 | PU/J35                 | 5.0              | 4.0    | 5.7    | 2220      | 40           | F125PU332(1)400(2)    | SMC5.7332(1)400J35(2)  |
| 400 | 200 | 0.0010                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 25           | F125SG102(1)400(2)    | SMC7.3102(1)400K31(2)  |
| 400 | 200 | 0.0012                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 25           | F125SG122(1)400(2)    | SMC7.3122(1)400K31(2)  |
| 400 | 200 | 0.0015                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 25           | F125SG152(1)400(2)    | SMC7.3152(1)400K31(2)  |
| 400 | 200 | 0.0018                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 25           | F125SG182(1)400(2)    | SMC7.3182(1)400K31(2)  |
| 400 | 200 | 0.0022                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 25           | F125SG222(1)400(2)    | SMC7.3222(1)400K31(2)  |
| 400 | 200 | 0.0027                 | SG/K31                 | 6.0              | 2.5    | 7.3    | 2824      | 25           | F125SG272(1)400(2)    | SMC7.3272(1)400K31(2)  |
| 400 | 200 | 0.0033                 | SL/K33                 | 6.0              | 3.0    | 7.3    | 2824      | 25           | F125SL332(1)400(2)    | SMC7.3332(1)400K33(2)  |
| 400 | 200 | 0.0039                 | SL/K33                 | 6.0              | 3.0    | 7.3    | 2824      | 25           | F125SL392(1)400(2)    | SMC7.3392(1)400K33(2)  |
| 400 | 200 | 0.0047                 | SL/K33                 | 6.0              | 3.0    | 7.3    | 2824      | 25           | F125SL472(1)400(2)    | SMC7.3472(1)400K33(2)  |
| 400 | 200 | 0.0056                 | SP/K35                 | 6.0              | 3.5    | 7.3    | 2824      | 25           | F125SP562(1)400(2)    | SMC7.3562(1)400K35(2)  |
| 400 | 200 | 0.0068                 | SP/K35                 | 6.0              | 3.5    | 7.3    | 2824      | 25           | F125SP682(1)400(2)    | SMC7.3682(1)400K35(2)  |
| 400 | 200 | 0.0082                 | ST/K37                 | 6.0              | 4.5    | 7.3    | 2824      | 25           | F125ST822(1)400(2)    | SMC7.3822(1)400K37(2)  |
| 400 | 200 | 0.010                  | ST/K37                 | 6.0              | 4.5    | 7.3    | 2824      | 25           | F125ST103(1)400(2)    | SMC7.3103(1)400K37(2)  |
| 400 | 200 | 0.010                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 15           | F125WP103(1)400(2)    | SMC10.2103(1)400A31(2) |
| 400 | 200 | 0.012                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 15           | F125WP123(1)400(2)    | SMC10.2123(1)400A31(2) |
| 400 | 200 | 0.015                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 15           | F125WP153(1)400(2)    | SMC10.2153(1)400A31(2) |
| 400 | 200 | 0.018                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 15           | F125WP183(1)400(2)    | SMC10.2183(1)400A31(2) |
| 400 | 200 | 0.022                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 15           | F125WP223(1)400(2)    | SMC10.2223(1)400A31(2) |
| 400 | 200 | 0.027                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 15           | F125WP273(1)400(2)    | SMC10.2273(1)400A31(2) |
| 400 | 200 | 0.033                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 15           | F125WP333(1)400(2)    | SMC10.2333(1)400A31(2) |
| 400 | 200 | 0.039                  | WP/A31                 | 9.1              | 5.5    | 10.2   | 4036      | 15           | F125WP393(1)400(2)    | SMC10.2393(1)400A31(2) |
| 400 | 200 | 0.047                  | YR/B31                 | 11.5             | 6.5    | 12.7   | 5045      | 10           | F125YR473(1)400(2)    | SMC12.7473(1)400B31(2) |
| 400 | 200 | 0.056                  | YR/B31                 | 11.5             | 6.5    | 12.7   | 5045      | 10           | F125YR563(1)400(2)    | SMC12.7563(1)400B31(2) |
| 400 | 200 | 0.068                  | YR/B31                 | 11.5             | 6.5    | 12.7   | 5045      | 10           | F125YR683(1)400(2)    | SMC12.7683(1)400B31(2) |
| VDC | VAC | Capacitance Value (µF) | Size Code (New/Legacy) | B (mm)           | H (mm) | L (mm) | Chip Size | dV/dt (V/µs) | New KEMET Part Number | Legacy Part Number     |

(1) G = ±2%, R = ±2.5% (Legacy code = H), J = ±5%.

(2) Insert ordering code for lead type and packaging. See Ordering Options Table for available options.

**Table 1 – Ratings & Part Number Reference cont'd**


| VDC | VAC | Capacitance Value (μF) | Size Code (New/Legacy) | Dimensions in mm |        |        | Chip Size | dV/dt (V/μs) | New KEMET Part Number | Legacy Part Number     |
|-----|-----|------------------------|------------------------|------------------|--------|--------|-----------|--------------|-----------------------|------------------------|
|     |     |                        |                        | B                | H      | L      |           |              |                       |                        |
| 400 | 200 | 0.082                  | YR/B31                 | 11.5             | 6.5    | 12.7   | 5045      | 10           | F125YR823(1)400(2)    | SMC12.7823(1)400B31(2) |
| 400 | 200 | 0.10                   | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 8            | F125ZS104(1)400(2)    | SMC16.5104(1)400C31(2) |
| 400 | 200 | 0.12                   | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 8            | F125ZS124(1)400(2)    | SMC16.5124(1)400C31(2) |
| 400 | 200 | 0.15                   | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 8            | F125ZS154(1)400(2)    | SMC16.5154(1)400C31(2) |
| 400 | 200 | 0.18                   | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 8            | F125ZS184(1)400(2)    | SMC16.5184(1)400C31(2) |
| 400 | 200 | 0.22                   | ZS/C31                 | 15.0             | 7.0    | 16.5   | 6560      | 8            | F125ZS224(1)400(2)    | SMC16.5224(1)400C31(2) |
| VDC | VAC | Capacitance Value (μF) | Size Code (New/Legacy) | B (mm)           | H (mm) | L (mm) | Chip Size | dV/dt (V/μs) | New KEMET Part Number | Legacy Part Number     |

(1) G = ±2%, R = ±2.5% (Legacy code = H), J = ±5%.

(2) Insert ordering code for lead type and packaging. See Ordering Options Table for available options.

## Soldering Process

Reflow soldering temperature is measured on the top body surface of the component. Preheating temperature should be less than 170°C. The time above 217°C should be less than 50 seconds. The peak temperature must not exceed 260°C.

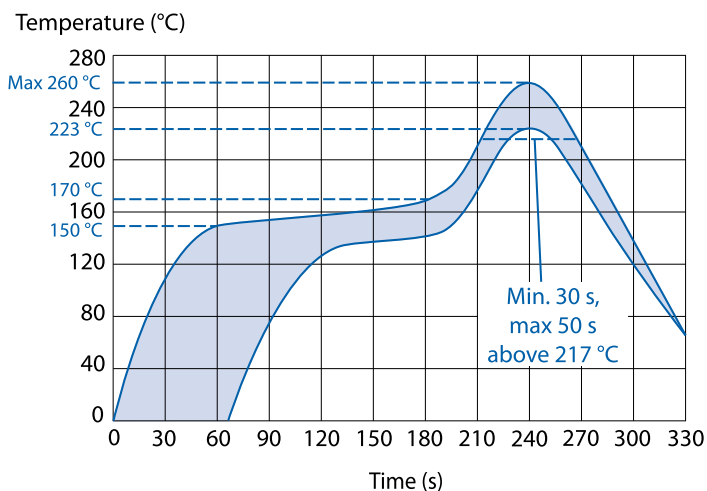

## Marking

- Capacitance
- Capacitance tolerance code
- Rated voltage code
- Capacitor type S for SMC
- Manufacturing date code

| Rated Voltage | Code |
|---------------|------|
| 50 VDC        | Z    |
| 100 VDC       | D    |
| 250 VDC       | H    |
| 400 VDC       | K    |


| Manufacturing Date Code (IEC 60062) |      |           |      |
|-------------------------------------|------|-----------|------|
| Y = Year, Z = Month                 |      |           |      |
| Year                                | Code | Month     | Code |
| 2000                                | M    | January   | 1    |
| 2001                                | N    | February  | 2    |
| 2002                                | P    | March     | 3    |
| 2003                                | R    | April     | 4    |
| 2004                                | S    | May       | 5    |
| 2005                                | T    | June      | 6    |
| 2006                                | U    | July      | 7    |
| 2007                                | V    | August    | 8    |
| 2008                                | W    | September | 9    |
| 2009                                | X    | October   | O    |
| 2010                                | A    | November  | N    |
| 2011                                | B    | December  | D    |
| 2012                                | C    |           |      |
| 2013                                | D    |           |      |
| 2014                                | E    |           |      |
| 2015                                | F    |           |      |
| 2016                                | H    |           |      |
| 2017                                | J    |           |      |
| 2018                                | K    |           |      |
| 2019                                | L    |           |      |
| 2020                                | M    |           |      |

## Packaging Quantities

| Chip Size (EIA) | Base (mm) | Height (mm) | Length (mm) | Bulk | Reel Horizontal Orientation | Reel Vertical Orientation |
|-----------------|-----------|-------------|-------------|------|-----------------------------|---------------------------|
| 2220            | 5         | 2.5         | 5.7         | 2000 | 3100                        |                           |
| 2220            | 5         | 3           | 5.7         | 2000 | 2400                        |                           |
| 2220            | 5         | 4           | 5.7         | 2000 | 2100                        |                           |
| 2824            | 6         | 2.5         | 7.3         | 2000 | 3100                        |                           |
| 2824            | 6         | 3           | 7.3         | 2000 | 2500                        |                           |
| 2824            | 6         | 3.5         | 7.3         | 2000 | 2300                        |                           |
| 2824            | 6         | 4.5         | 7.3         | 1000 | 1700                        |                           |
| 4036            | 9.1       | 5.5         | 10.2        | 1000 | 800                         | 500                       |
| 5045            | 11.5      | 6.5         | 12.7        | 1000 | 600                         | 400                       |
| 6560            | 15        | 7           | 16.5        | 800  | 500                         | 200                       |

## Carrier Taping & Packaging (IEC 60286–2)


### Horizontal Taping Orientation

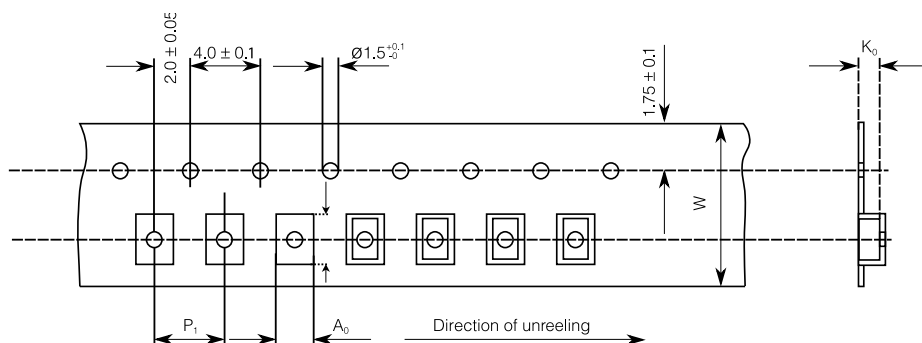

| Chip Size (EIA)<br>Horizontal Mounting | Dimensions in mm |         |         | Taping Specification |                |                |                |                |        |                |                |
|----------------------------------------|------------------|---------|---------|----------------------|----------------|----------------|----------------|----------------|--------|----------------|----------------|
|                                        | B                | H       | L       | W                    | P <sub>1</sub> | A <sub>0</sub> | B <sub>0</sub> | K <sub>0</sub> | D      | W <sub>1</sub> | W <sub>2</sub> |
|                                        | Nominal          | Nominal | Nominal | -0/+0.3              | +/-0.1         | Nominal        | Nominal        | Nominal        | -/+2.0 | -0/+2          | Maximum        |
| 2220                                   | 5.0              | 2.5     | 5.7     | 12.0                 | 8.0            | 5.5            | 6.0            | 2.8            | 330    | 12.4           | 22.0           |
| 2220                                   | 5.0              | 3.0     | 5.7     | 12.0                 | 8.0            | 5.5            | 6.0            | 3.3            | 330    | 12.4           | 22.0           |
| 2220                                   | 5.0              | 4.0     | 5.7     | 12.0                 | 8.0            | 5.5            | 6.0            | 4.3            | 330    | 12.4           | 22.0           |
| 2824                                   | 6.0              | 2.5     | 7.3     | 12.0                 | 8.0            | 6.5            | 7.5            | 2.8            | 330    | 12.4           | 22.0           |
| 2824                                   | 6.0              | 3.0     | 7.3     | 12.0                 | 8.0            | 6.5            | 7.5            | 3.3            | 330    | 12.4           | 22.0           |
| 2824                                   | 6.0              | 3.5     | 7.3     | 12.0                 | 8.0            | 6.5            | 7.5            | 3.8            | 330    | 12.4           | 22.0           |
| 2824                                   | 6.0              | 4.5     | 7.3     | 16.0                 | 8.0            | 6.6            | 7.9            | 5.5            | 330    | 16.0           | 20.0           |
| 4036                                   | 9.1              | 5.5     | 10.2    | 16.0                 | 16.0           | 9.5            | 10.5           | 5.8            | 330    | 16.4           | 22.0           |
| 5045                                   | 11.5             | 6.5     | 12.7    | 24.0                 | 16.0           | 11.9           | 13.1           | 6.8            | 330    | 24.4           | 30.0           |
| 6560                                   | 15.0             | 7.0     | 16.5    | 24.0                 | 20.0           | 15.4           | 16.8           | 7.3            | 330    | 24.4           | 30.0           |

Carrier Taping & Packaging (IEC 60286–2) cont'd

Vertical Taping Orientation

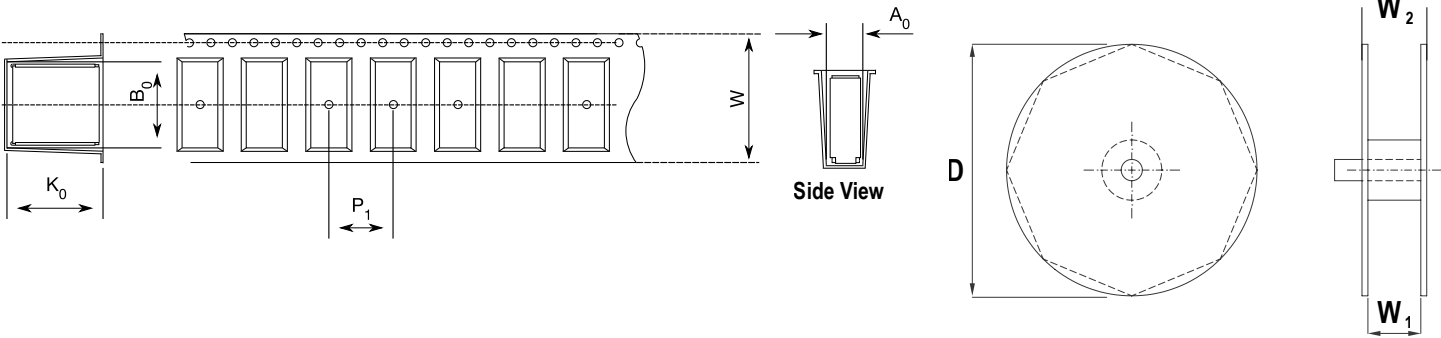

| Size Code<br>Vertical<br>Mounting | Dimensions in mm |         |         | Taping Specification |                |                |                |                |        |                |                |
|-----------------------------------|------------------|---------|---------|----------------------|----------------|----------------|----------------|----------------|--------|----------------|----------------|
|                                   | B                | H       | L       | W                    | P <sub>1</sub> | A <sub>0</sub> | B <sub>0</sub> | K <sub>0</sub> | D      | W <sub>1</sub> | W <sub>2</sub> |
|                                   | Nominal          | Nominal | Nominal | -0/+0.3              | +/-0.1         | Nominal        | Nominal        | Nominal        | -/+2.0 | -0/+2          | Maximum        |
| 4022                              | 5.5              | 9.1     | 10.2    | 24.0                 | 16.0           | 6.0            | 10.5           | 9.3            | 330    | 24.4           | 30.0           |
| 5026                              | 6.5              | 11.5    | 12.7    | 24.0                 | 16.0           | 6.9            | 13.1           | 11.8           | 330    | 24.4           | 30.0           |
| 6528                              | 7.0              | 15.0    | 16.5    | 44.0                 | 20.0           | 7.5            | 17.0           | 15.3           | 330    | 44.5           | 49.5           |

**Note:** Chip dimensions B and H correspond to dimensions H and B in the horizontal mounting table.

## KEMET Corporation World Headquarters

2835 KEMET Way  
Simpsonville, SC 29681

Mailing Address:  
P.O. Box 5928  
Greenville, SC 29606

www.kemet.com  
Tel: 864-963-6300  
Fax: 864-963-6521

**Corporate Offices**  
Fort Lauderdale, FL  
Tel: 954-766-2800

## North America

**Southeast**  
Lake Mary, FL  
Tel: 407-855-8886

**Northeast**  
Wilmington, MA  
Tel: 978-658-1663

**Central**  
Novi, MI  
Tel: 248-306-9353

**West**  
Milpitas, CA  
Tel: 408-433-9950

**Mexico**  
Guadalajara, Jalisco  
Tel: 52-33-3123-2141

## Europe

**Southern Europe**  
Paris, France  
Tel: 33-1-4646-1006

Sasso Marconi, Italy  
Tel: 39-051-939111

**Central Europe**  
Landsberg, Germany  
Tel: 49-8191-3350800

Kamen, Germany  
Tel: 49-2307-438110

**Northern Europe**  
Bishop's Stortford, United Kingdom  
Tel: 44-1279-460122

Espoo, Finland  
Tel: 358-9-5406-5000

## Asia

**Northeast Asia**  
Hong Kong  
Tel: 852-2305-1168

Shenzhen, China  
Tel: 86-755-2518-1306

Beijing, China  
Tel: 86-10-5829-1711

Shanghai, China  
Tel: 86-21-6447-0707

Taipei, Taiwan  
Tel: 886-2-27528585

**Southeast Asia**  
Singapore  
Tel: 65-6586-1900

Penang, Malaysia  
Tel: 60-4-6430200

Bangalore, India  
Tel: 91-806-53-76817

*Note: KEMET reserves the right to modify minor details of internal and external construction at any time in the interest of product improvement. KEMET does not assume any responsibility for infringement that might result from the use of KEMET Capacitors in potential circuit designs. KEMET is a registered trademark of KEMET Electronics Corporation.*

## Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kemet:

[SMC10.2123J50A31TR16](#)