

PHYSICAL DIMENSIONS:


A 3.05 [.120] $\pm$ 0.08 [.003]
 B 2.54 [.100] $\pm$ 0.08 [.003]
 B₁ 3.05 [.120] $\pm$ MAX
 C 4.06 [.160] $\pm$ 0.15 [.006]
 C₁ 5.08 [.200] $\pm$ MAX

WIRE DIMENSIONS:

T₁ 1.27 [.050] $\pm$ 0.05 [.002]
 T₂ 1.52 [.060] $\pm$ 0.51 [.020]

28F0121-0SR-10



**UNCONTROLLED
DOCUMENT**

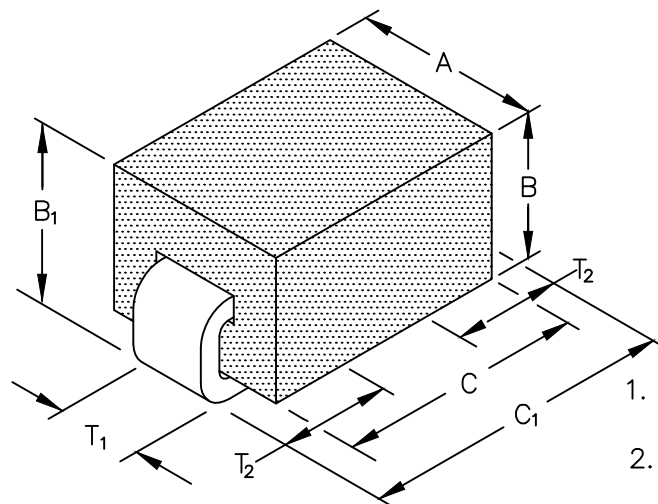


ELECTRICAL CHARACTERISTICS:			
Z @ 100MHz (Ω)	DCR (Ω)	Rated Current	
Nominal	48		
Minimum	36		
Maximum	60	.00075	10,000 mA

NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 2500 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. REF. CARRIER TAPE SPECIFICATION # CART121-03.

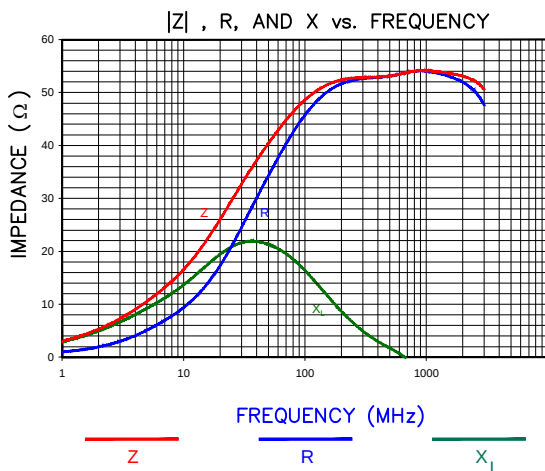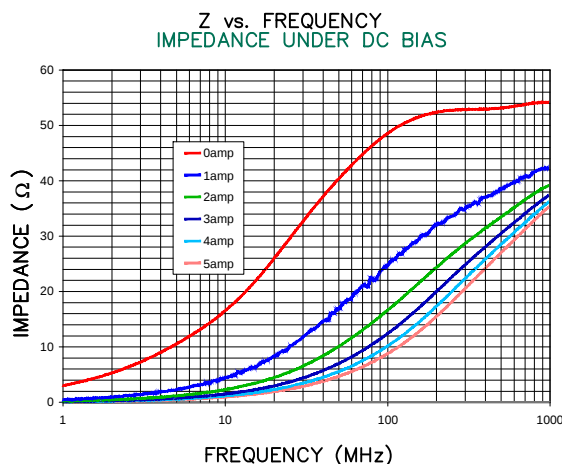


LAND PATTERNS FOR REFLOW SOLDERING

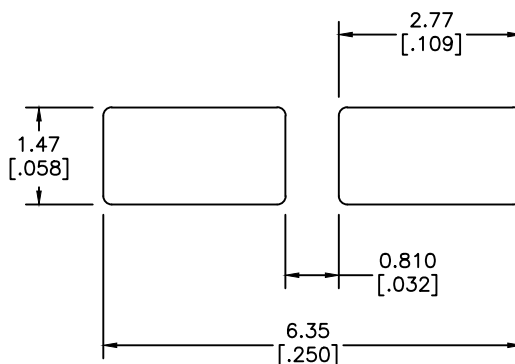

(For wave soldering, add 0.762 [.030] to this dimension.)

RECOMMENDED SOLDERING CONDITIONS

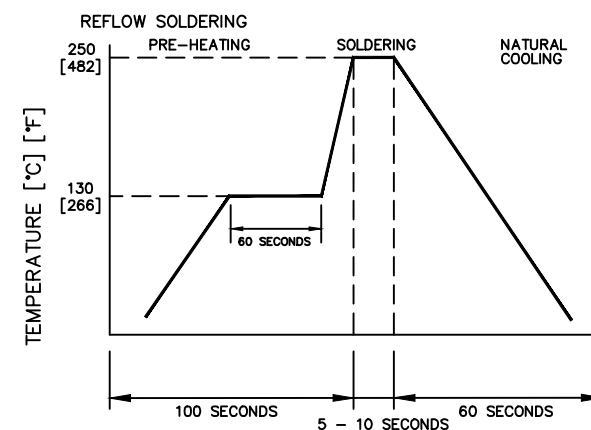

DIMENSIONS ARE IN mm (INCHES).

REV	DESCRIPTION	DATE	INT
J	UPDATE COMPANY LOGO	04/23/15	QIU
H	UPDATE COMPANY LOGO	10/24/08	JRK
G	CORRECT TYPO ERROR IN ELECT TABLE	11/26/07	JRK
F	UPDATE LANDPATTERN ADD ROHS SYMBOL	08/09/07	JRK
E	UPDATE COMPANY LOGO	04/19/07	JRK
D	CHANGE RATED CURRENT FROM 5000mA	02/17/04	JRK

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.

Laird

PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
28F0121-0SR-10	J	ASSEMBLY	JRK
DATE: 11/13/02	SCALE: NTS	SHEET: 1 OF 2	
CAD #	TOOL #		
28F0121-0SR-10-1-J	-		

