

6

5

4

3

2

1

MATERIAL AND FINISH

Insulator: Polycarbonate or Thermoplastic, black,
UL-94V-0 rated.

Solder Terminals: Brass, Tin plated.

ELECTRICAL SPECIFICATIONS:

Rated current: 10A

Rated voltage: 250VAC



Rated current: 20A

Rated voltage: 250VAC





No of Port	L	E	F
2	51.2	48.0	48.3
3	75.4	72.0	72.2
4	99.6	96.0	96.2
5	123.2	120.0	120.3
6	147.2	144.0	144.4
7	171.2	168.0	168.4

ORDERING CODE:



44R02-131 - 1 - 2

1) NO OF PORT (SEE CHART ABOVE)

2) PANEL THICKNESS

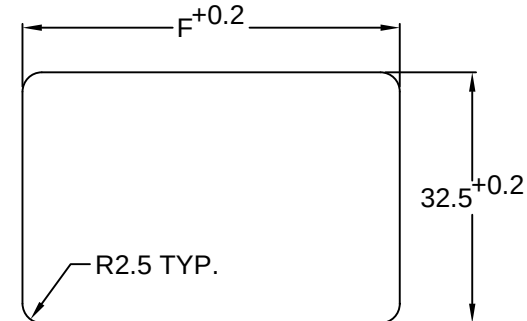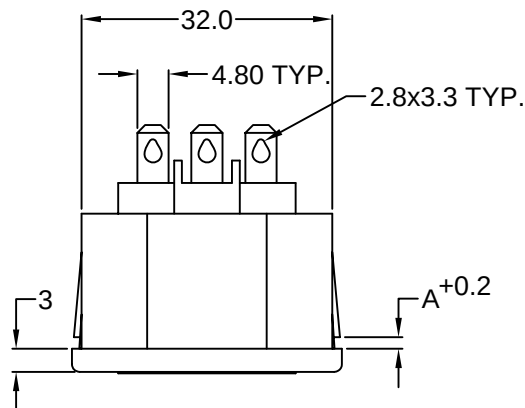

RECOMMENDED
PANEL CUTOUT

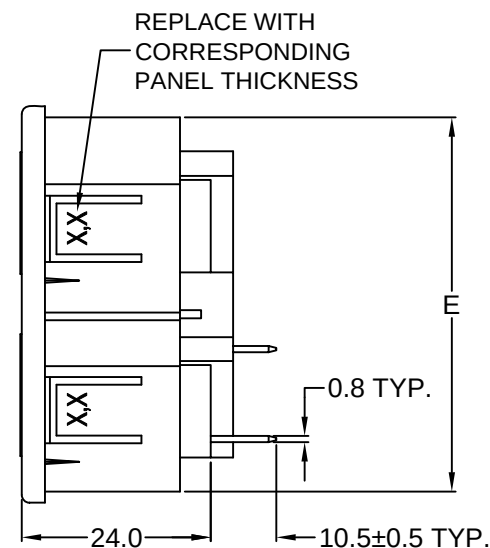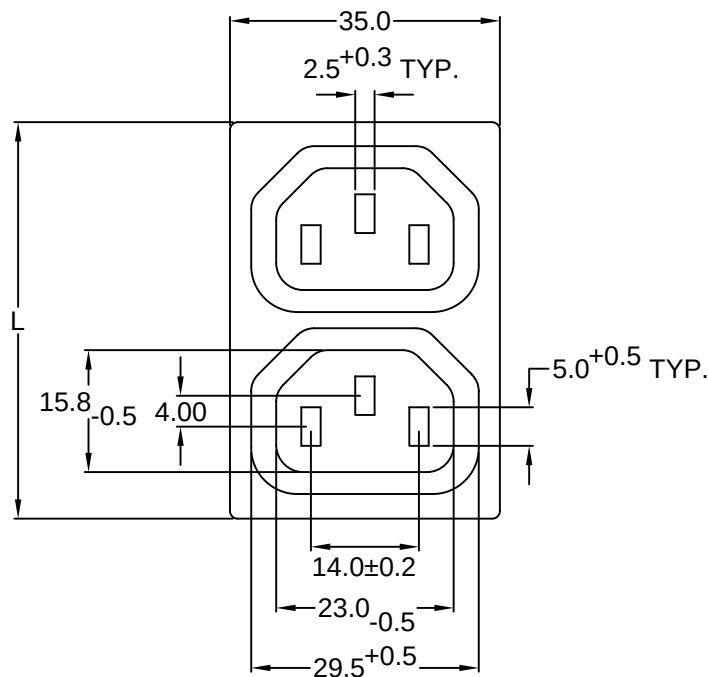

RoHS
COMPLIANT

REV	REVISIONS				DATE	CHANGE				CHKG				CHK APPR			
	A	B	C	D		CHNG	UL	RATING	TO 20A	PB	TD	PB	TD	PB	TD	PB	TD
	REV	DATE	CHNG	UL	RATING	TO 20A	PB	TD	PB	TD	PB	TD	PB	TD	PB	TD	PB
	REV	DATE	CHNG	UL	RATING	TO 20A	PB	TD	PB	TD	PB	TD	PB	TD	PB	TD	PB
	A	2/28/03	CHNG	UL	RATING	TO 20A	PB	TD	PB	TD	PB	TD	PB	TD	PB	TD	PB
	B	5/14/04	REV'D	DM	L, E, F												
	C	1/24/05	CHNG	DM	E & F	FOR 3 & 4 PORTS											
	D	1/30/08	ADD	1.0mm	PANEL THICKNESS												

P/N	A	MAX. PANEL THICKNESS
44R02-X131-100	1.0	1.0
44R02-X131-150	1.5	1.5
44R02-X131-250	2.5	2.5

ADDITIONAL PANEL THICKNESS
AVAILABLE ON REQUEST

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY DT DATE: 1/15/03
CHECK BY PB DATE: 1/15/03
APPR BY DATE:

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 C13 STRIP APPL. OUTLET;
SNAP-IN, 4.8 Q.C. TERMINAL

PART #: **44R02-X131-XXX**

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

SHEET
1 of 1

REV: D