

Features

- ◆ Silicon Planar Power Zener Diodes.
- ◆ For use as low voltage stabilizer or voltage reference.
- ◆ The Zener voltages are graded according to the international E 24 standard. Higher Zener voltages and 1% tolerance available on request.
- ◆ Diodes available in these tolerance series:
±2% BZV55-B, ±3% BZV55-F, ±5% BZV55-C.




MiniMELF (SOD-80C)

Mechanical Data

- ◆ Case: MiniMELF Glass Case (SOD-80C)
- ◆ Weight: approx. 0.05g
- ◆ Cathode Band Color: Blue

Cathode Mark

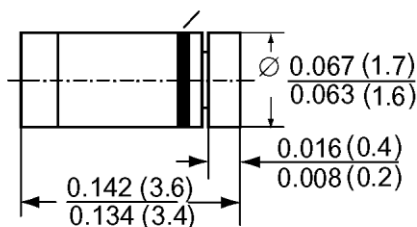

Dimensions in inches and (millimeters)

Maximum Ratings and Thermal Characteristics

($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Zener current (see Table "Characteristics")			
Power dissipation at $T_{\text{flange}}=50^{\circ}\text{C}$	P_{tot}	500	mW
Power dissipation at $T_A=50^{\circ}\text{C}$	P_{tot}	400 ⁽¹⁾	mW
Junction temperature	T_j	-65 to +200	$^{\circ}\text{C}$
Storage temperature range	T_s	-65 to +200	$^{\circ}\text{C}$
Continuous forward current	I_F	250	mA
Thermal resistance junction to ambient air	$R_{\theta JA}$	0.38 ⁽¹⁾	$^{\circ}\text{C/mW}$
Thermal resistance junction to lead	$R_{\theta JL}$	0.30	$^{\circ}\text{C/mW}$
Peak reverse power dissipation (non-repetitive) $t_p=100\mu\text{s}$	P_{ZSM}	30 ⁽²⁾	W

- Notes:**
1. Mounted on ceramic substrate 10mm x 10mm x 0.6mm
 2. $T_j=150^{\circ}\text{C}$

Electrical Characteristics

(T_A=25°C unless otherwise noted) Maximum V_Z=0.9V at I_Z=10mA

Type number y=B for +2% V _Z y=F for +3% V _Z y=C for +5% V _Z	Dynamic resistance		Temp. coefficient of zener voltage at I _Z =5mA α _{VZ} (% / °C)		Reverse leakage current at T _{amb} =25°C	
	at I _Z =5mA f=1kHz r _{zj} (Ω) Max.	at I _Z =1mA f=1kHz r _{zj} (Ω) Max.	Min.	Max.	I _R (μA)	at V _R (Volts)
BZV55 - y2V4	100	600	- 0.08	- 0.06	50	1
BZV55 - y2V7	100	600	- 0.08	- 0.06	20	1
BZV55 - y3V0	95	600	- 0.08	- 0.06	10	1
BZV55 - y3V3	95	600	- 0.08	- 0.05	5	1
BZV55 - y3V6	90	600	- 0.08	- 0.04	5	1
BZV55 - y3V9	90	600	- 0.07	- 0.03	3	1
BZV55 - y4V3	90	600	- 0.04	- 0.01	3	1
BZV55 - y4V7	80	500	- 0.03	+ 0.01	3	2
BZV55 - y5V1	60	480	- 0.02	+ 0.05	2	2
BZV55 - y5V6	40	400	- 0.01	+ 0.06	1	2
BZV55 - y6V2	10	150	0	+ 0.07	3	4
BZV55 - y6V8	15	80	+ 0.01	+ 0.08	2	4
BZV55 - y7V5	15	80	+ 0.01	+ 0.09	1	5
BZV55 - y8V2	15	80	+ 0.01	+ 0.09	0.7	5
BZV55 - y9V1	15	100	+ 0.02	+ 0.10	0.5	6
BZV55 - y10	20	150	+ 0.03	+ 0.11	0.2	7
BZV55 - y11	20	150	+ 0.03	+ 0.11	0.1	8
BZV55 - y12	25	150	+ 0.03	+ 0.11	0.1	8
BZV55 - y13	30	170	+ 0.03	+ 0.11	0.1	8
BZV55 - y15	30	200	+ 0.03	+ 0.11	0.05	10
BZV55 - y16	40	200	+ 0.03	+ 0.11	0.05	11
BZV55 - y18	45	225	+ 0.03	+ 0.11	0.05	13
BZV55 - y20	55	225	+ 0.03	+ 0.11	0.05	14
BZV55 - y22	55	250	+ 0.03	+ 0.11	0.05	15
BZV55 - y24	70	250	+ 0.04	+ 0.12	0.05	17
BZV55 - y27	80 ⁽³⁾	300 ⁽⁴⁾	+ 0.04 ⁽³⁾	+ 0.12 ⁽³⁾	0.05	19
BZV55 - y30	80 ⁽³⁾	300 ⁽⁴⁾	+ 0.04 ⁽³⁾	+ 0.12 ⁽³⁾	0.05	21
BZV55 - y33	80 ⁽³⁾	325 ⁽⁴⁾	+ 0.04 ⁽³⁾	+ 0.12 ⁽³⁾	0.05	23
BZV55 - y36	90 ⁽³⁾	350 ⁽⁴⁾	+ 0.04 ⁽³⁾	+ 0.12 ⁽³⁾	0.05	25
BZV55 - y39	130 ⁽³⁾	350 ⁽⁴⁾	+ 0.04 ⁽³⁾	+ 0.12 ⁽³⁾	0.05	27
BZV55 - y43	150 ⁽³⁾	375 ⁽⁴⁾	+ 0.04 ⁽³⁾	+ 0.12 ⁽³⁾	0.05	30
BZV55 - y47	170 ⁽³⁾	375 ⁽⁴⁾	+ 0.04 ⁽³⁾	+ 0.12 ⁽³⁾	0.05	33
BZV55 - y51	180 ⁽³⁾	400 ⁽⁴⁾	+ 0.04 ⁽³⁾	+ 0.12 ⁽³⁾	0.05	36
BZV55 - y56	200 ⁽³⁾	425 ⁽⁴⁾	typ. +0.1 ⁽³⁾		0.05	39
BZV55 - y62	215 ⁽³⁾	450 ⁽⁴⁾	typ. +0.1 ⁽³⁾		0.05	43
BZV55 - y68	240 ⁽³⁾	475 ⁽⁴⁾	typ. +0.1 ⁽³⁾		0.05	48
BZV55 - y75	255 ⁽⁴⁾	500 ⁽⁴⁾	typ. +0.1 ⁽³⁾		0.05	53

- Notes:**
1. Tested with pulses t_p=5 ms.
 2. Valid provided that electrodes are kept at ambient temperature.
 3. at I_Z=2.0 mA
 4. at I_Z=0.5 mA
- y = Zener voltage tolerance designator (see next page for V_Z specifications)

Electrical Characteristics

(T_A =25°C unless otherwise noted) Maximum V_F =0.9V at I_F =10mA

Type number ±5% Tol.	Zener voltage range ⁽¹⁾ at I _Z =5mA V _Z (Volts)	
	Min.	Max.
BZV55-C2V4	2.20	2.60
BZV55-C2V7	2.50	2.90
BZV55-C3V0	2.80	3.20
BZV55-C3V3	3.10	3.50
BZV55-C3V6	3.40	3.80
BZV55-C3V9	3.70	4.10
BZV55-C4V3	4.00	4.60
BZV55-C4V7	4.40	5.00
BZV55-C5V1	4.80	5.40
BZV55-C5V6	5.20	6.00
BZV55-C6V2	5.80	6.60
BZV55-C6V8	6.40	7.20
BZV55-C7V5	7.00	7.90
BZV55-C8V2	7.70	8.70
BZV55-C9V1	8.50	9.60
BZV55-C10	9.40	10.60
BZV55-C11	10.40	11.60
BZV55-C12	11.40	12.70
BZV55-C13	12.40	14.10
BZV55-C15	13.80	15.60
BZV55-C16	15.30	17.10
BZV55-C18	16.80	19.10
BZV55-C20	18.80	21.20
BZV55-C22	20.80	23.30
BZV55-C24	22.80	25.60
BZV55-C27	25.10	28.90 ⁽³⁾
BZV55-C30	28.00	32.00 ⁽³⁾
BZV55-C33	31.00	35.00 ⁽³⁾
BZV55-C36	34.00	38.00 ⁽³⁾
BZV55-C39	37.00	41.00 ⁽³⁾
BZV55-C43	40.00	46.00 ⁽³⁾
BZV55-C47	44.00	50.00 ⁽³⁾
BZV55-C51	48.00	54.00 ⁽³⁾
BZV55-C56	52.00	60.00 ⁽³⁾
BZV55-C62	58.00	66.00 ⁽³⁾
BZV55-C68	64.00	72.00 ⁽³⁾
BZV55-C75	70.00	79.00 ⁽³⁾

Type number ±3% Tol.	Zener voltage range ⁽¹⁾ at I _Z =5mA V _Z (Volts)	
	Min.	Max.
BZV55-F2V4	2.33	2.47
BZV55-F2V7	2.62	2.78
BZV55-F3V0	2.91	3.09
BZV55-F3V3	3.20	3.40
BZV55-F3V6	3.49	3.71
BZV55-F3V9	3.78	4.02
BZV55-F4V3	4.17	4.43
BZV55-F4V7	4.56	4.84
BZV55-F5V1	4.95	5.25
BZV55-F5V6	5.43	5.77
BZV55-F6V2	6.01	6.39
BZV55-F6V8	6.60	7.00
BZV55-F7V5	7.28	7.72
BZV55-F8V2	7.95	8.45
BZV55-F9V1	8.83	9.37
BZV55-F10	9.70	10.30
BZV55-F11	10.67	11.33
BZV55-F12	11.64	12.36
BZV55-F13	12.61	13.39
BZV55-F15	14.55	15.45
BZV55-F16	15.50	16.50
BZV55-F18	17.50	18.50
BZV55-F20	19.40	20.60
BZV55-F22	21.30	22.70
BZV55-F24	23.30	24.70
BZV55-F27	26.20	27.80 ⁽³⁾
BZV55-F30	29.10	30.90 ⁽³⁾
BZV55-F33	32.00	34.00 ⁽³⁾
BZV55-F36	34.90	37.10 ⁽³⁾
BZV55-F39	37.80	40.20 ⁽³⁾
BZV55-F43	41.70	44.30 ⁽³⁾
BZV55-F47	45.60	48.40 ⁽³⁾
BZV55-F51	49.50	52.50 ⁽³⁾
BZV55-F56	54.30	57.70 ⁽³⁾
BZV55-F62	60.10	63.90 ⁽³⁾
BZV55-F68	66.00	70.00 ⁽³⁾
BZV55-F75	72.80	77.20 ⁽³⁾

Type number ±2% Tol.	Zener voltage range ⁽¹⁾ at I _Z =5mA V _Z (Volts)	
	Min.	Max.
BZV55-B2V4	2.35	2.45
BZV55-B2V7	2.65	2.75
BZV55-B3V0	2.94	3.06
BZV55-B3V3	3.23	3.37
BZV55-B3V6	3.53	3.67
BZV55-B3V9	3.82	3.98
BZV55-B4V3	4.21	4.39
BZV55-B4V7	4.61	4.79
BZV55-B5V1	5.00	5.20
BZV55-B5V6	5.49	5.71
BZV55-B6V2	6.08	6.32
BZV55-B6V8	6.66	6.94
BZV55-B7V5	7.35	7.65
BZV55-B8V2	8.04	8.36
BZV55-B9V1	8.92	9.28
BZV55-B10	9.80	10.20
BZV55-B11	10.80	11.20
BZV55-B12	11.80	12.20
BZV55-B13	12.70	13.30
BZV55-B15	14.70	15.30
BZV55-B16	15.70	16.30
BZV55-B18	17.60	18.40
BZV55-B20	19.60	20.40
BZV55-B22	21.60	22.40
BZV55-B24	23.50	24.50
BZV55-B27	26.50	27.50 ⁽³⁾
BZV55-B30	29.40	30.60 ⁽³⁾
BZV55-B33	32.30	33.70 ⁽³⁾
BZV55-B36	35.30	36.70 ⁽³⁾
BZV55-B39	38.20	39.80 ⁽³⁾
BZV55-B43	42.10	43.90 ⁽³⁾
BZV55-B47	46.10	47.90 ⁽³⁾
BZV55-B51	50.00	52.00 ⁽³⁾
BZV55-B56	54.90	57.10 ⁽³⁾
BZV55-B62	60.80	63.20 ⁽³⁾
BZV55-B68	66.60	69.40 ⁽³⁾
BZV55-B75	73.50	76.50 ⁽³⁾


- Notes:**
- 1. Tested with pulses t_p =5ms
 - 2. Valid provided that electrodes are kept at ambient temperature
 - 3. at I_Z=2.0 mA

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)


Breakdown characteristics

at $T_J = \text{constant (pulsed)}$

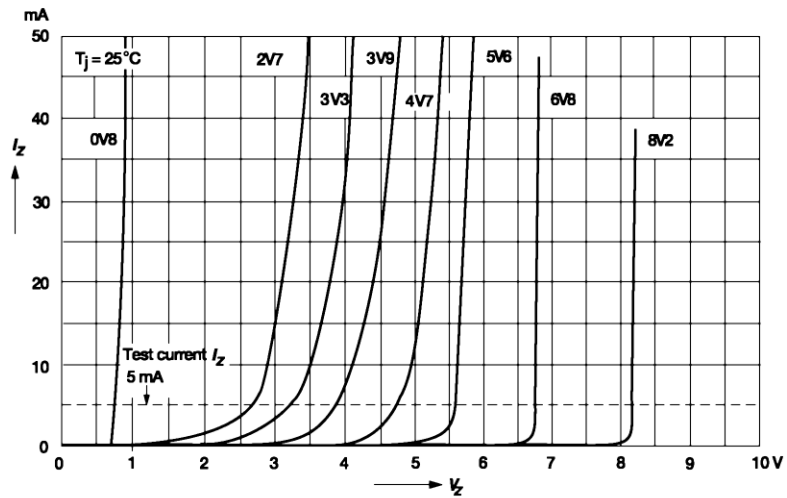





Breakdown characteristics

at $T_J = \text{constant (pulsed)}$

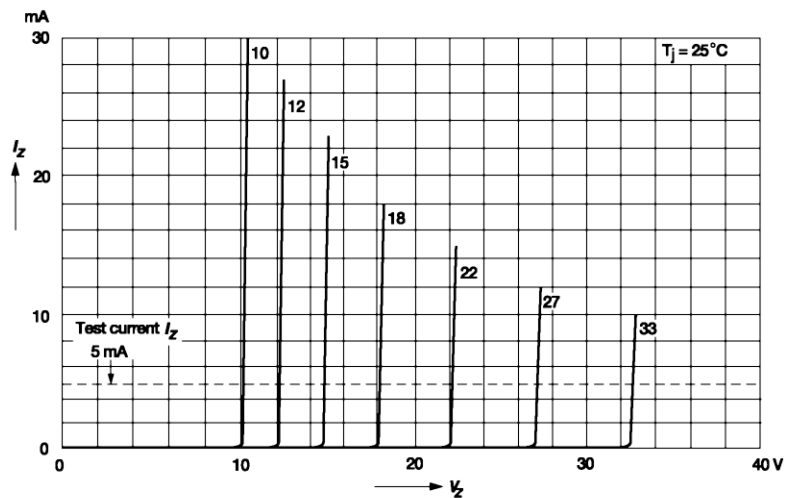

RATINGS AND CHARACTERISTIC CURVES


($T_A = 25^{\circ}\text{C}$ unless otherwise noted)

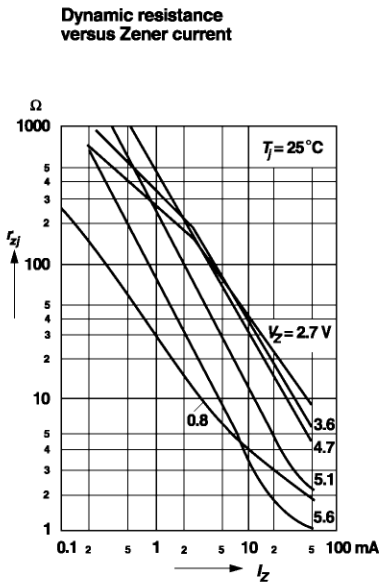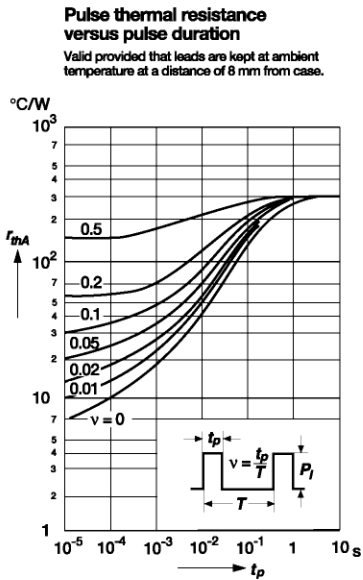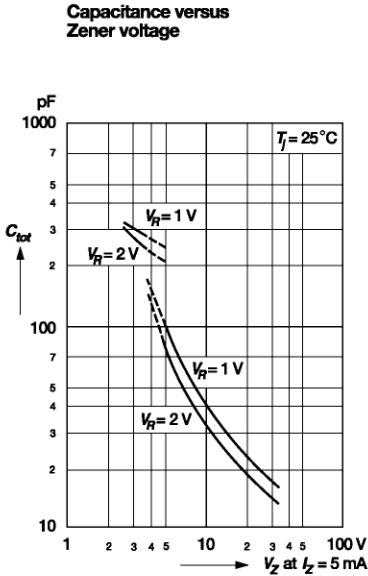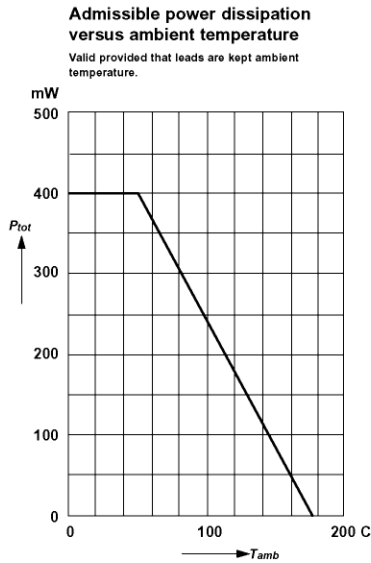

RATINGS AND CHARACTERISTIC CURVES


(T_A = 25°C unless otherwise noted)

Dynamic resistance
versus Zener current

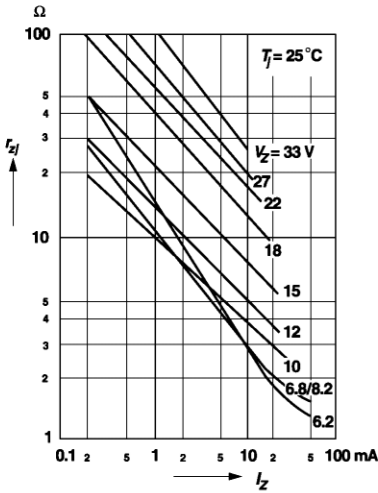


Thermal differential resistance
versus Zener voltage


Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.

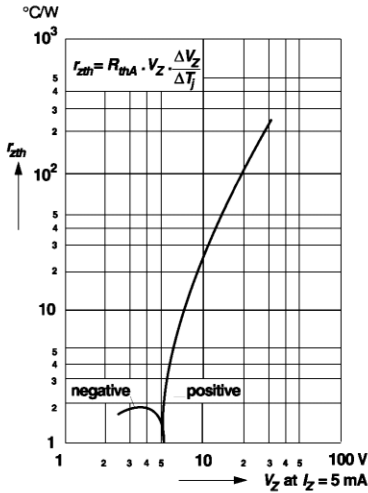

Dynamic resistance
versus Zener voltage

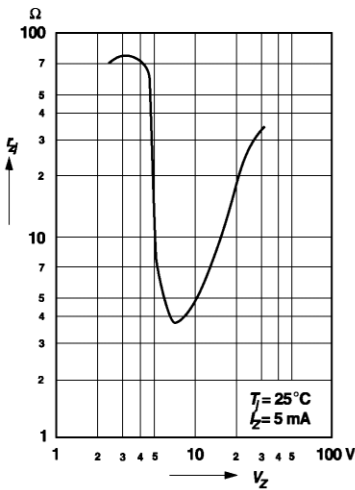


Thermal resistance
versus lead length

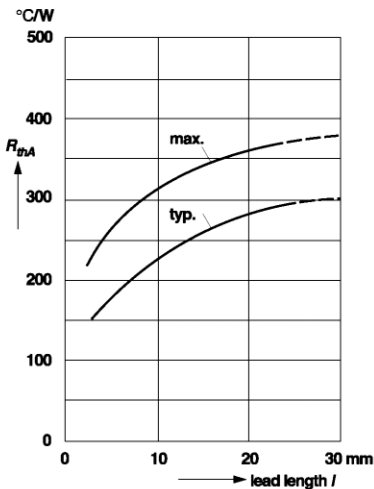


RATINGS AND CHARACTERISTIC CURVES

(T_A = 25°C unless otherwise noted)

Temperature dependence of Zener voltage versus Zener voltage

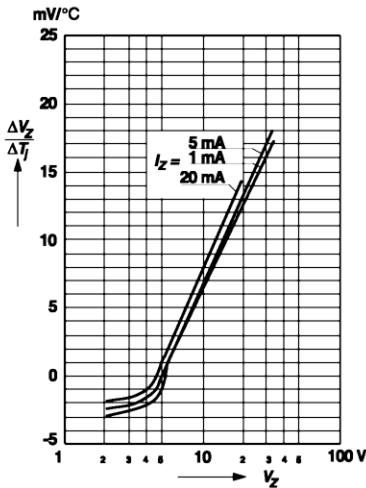

Change of Zener voltage from turn-on up to the point of thermal equilibrium versus Zener voltage

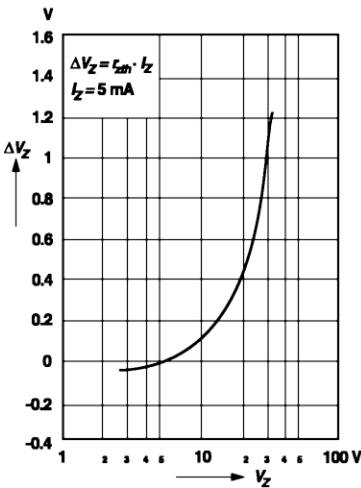

Change of Zener voltage versus junction temperature

