



1 Mb (128K x 8) Static RAM

Features

- Very high speed: 55 and 70 ns
- Wide voltage range: 2.2V to 3.6V
- Pin compatible with CY62128V
- Ultra-low active power
 - Typical active current: 0.85 mA @ f = 1 MHz
 - Typical active current: 5 mA @ f = f_{MAX}
- Ultra-low standby power
- Easy memory expansion with $\overline{CE_1}$, $\overline{CE_2}$, and $\overline{OE}$ features
- Automatic power-down when deselected
- Packages offered in a 32-lead SOIC, a 32-lead TSOP, a 32-lead Short TSOP, and a 32-lead Reverse TSOP

Functional Description^[1]

The CY62128DV30 is a high-performance CMOS static RAM organized as 128K words by 8 bits. This device features advanced circuit design to provide ultra-low active current. This is ideal for providing More Battery Life™ (MoBL[®]) in portable applications such as cellular telephones. The device also has an automatic power-down feature that significantly reduces

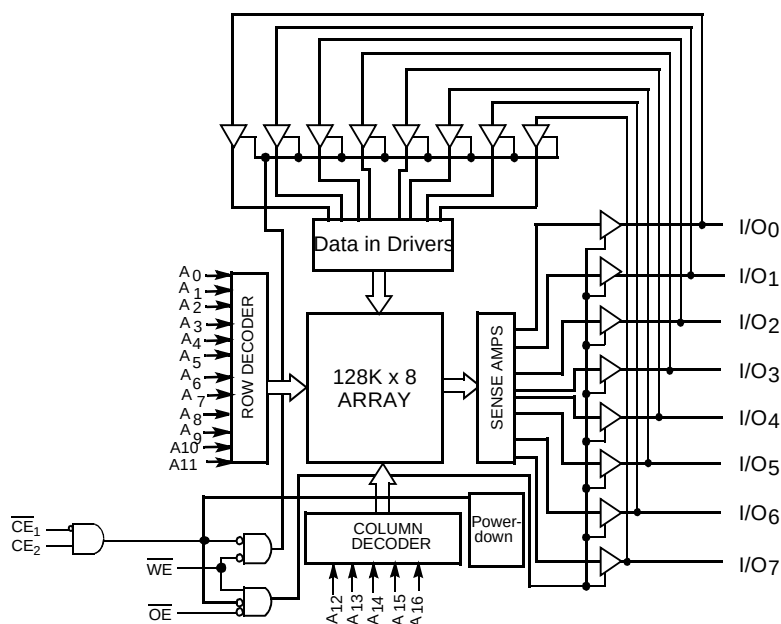
power consumption by 90% when addresses are not toggling. The device can be put into standby mode reducing power consumption by more than 99% when deselected Chip Enable 1 ($\overline{CE_1}$) HIGH or Chip Enable 2 ($\overline{CE_2}$) LOW. The input/output pins (I/O₀ through I/O₇) are placed in a high-impedance state when: deselected Chip Enable 1 ($\overline{CE_1}$) HIGH or Chip Enable 2 ($\overline{CE_2}$) LOW, outputs are disabled ($\overline{OE}$ HIGH), or during a write operation (Chip Enable 1 ($\overline{CE_1}$) LOW and Chip Enable 2 ($\overline{CE_2}$) HIGH and Write Enable (WE) LOW).

Writing to the device is accomplished by taking Chip Enable 1 ($\overline{CE_1}$) LOW with Chip Enable 2 ($\overline{CE_2}$) HIGH and Write Enable (WE) LOW. Data on the eight I/O pins is then written into the location specified on the Address pin (A₀ thro. A₁₆).

Reading from the device is accomplished by taking Chip Enable 1 ($\overline{CE_1}$) LOW with Chip Enable 2 ($\overline{CE_2}$) HIGH and Output Enable ($\overline{OE}$) LOW while forcing the Write Enable (WE) HIGH. Under these conditions, the contents of the memory location specified by the address pins will appear on the I/O pins.

The eight input/output pins (I/O₀ through I/O₇) are placed in a high-impedance state when the device is deselected ($\overline{CE_1}$ HIGH or $\overline{CE_2}$ LOW), the outputs are disabled ($\overline{OE}$ HIGH) or during a write operation ($\overline{CE_1}$ LOW, $\overline{CE_2}$ HIGH), and WE LOW).

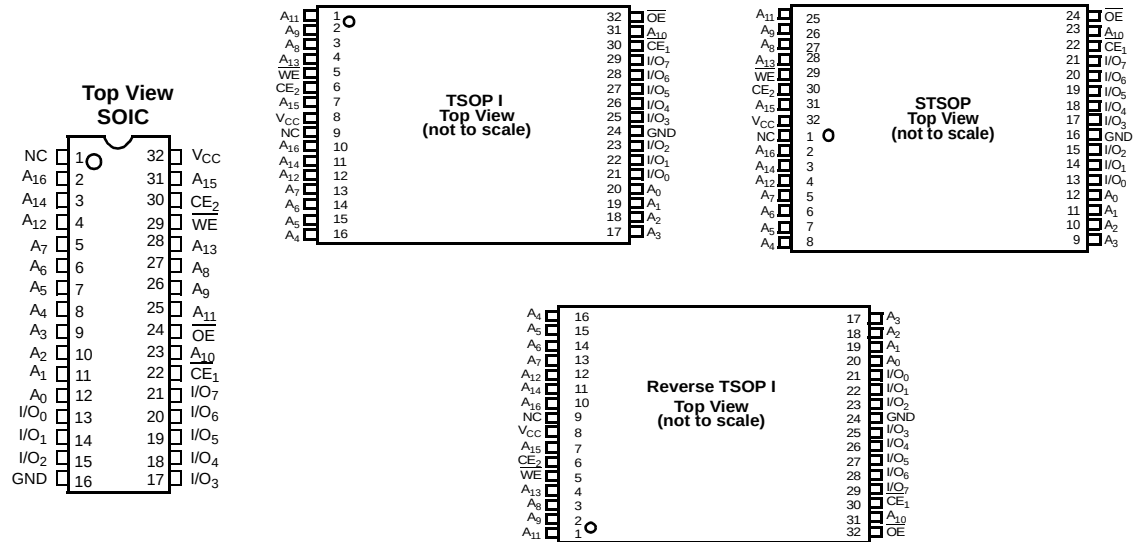
Logic Block Diagram



Note:

1. For best-practice recommendations, please refer to the Cypress application note "System Design Guidelines" on <http://www.cypress.com>.

Pin Configuration^[2]



Note:

- NC pins are not connected to the die.

**Maximum Ratings**

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature -65°C to +150°C

Ambient Temperature with Power Applied..... -55°C to +125°C

Supply Voltage to Ground Potential -0.3V to 3.9V

DC Voltage Applied to Outputs in High-Z State^[3] -0.3V to $V_{CC} + 0.3V$

DC Input Voltage^[3] -0.3V to $V_{CC} + 0.3V$

Output Current into Outputs (LOW)..... 20 mA

Static Discharge Voltage..... > 2001V (per MIL-STD-883, Method 3015)

Latch-up Current > 200 mA

Operating Range

Range	Ambient Temperature (T_A)	V_{CC} ^[4]
Industrial	-40°C to +85°C	2.2V to 3.6V

Product Portfolio

Product	V _{CC} Range (V)			Speed (ns)	Power Dissipation					
					Operating, I _{cc} (mA)				Standby, I _{SB2} (μA)	
	f = 1 MHz		f = f _{MAX}							
	Min.	Typ.	Max.		Typ. ^[5]	Max.	Typ. ^[5]	Max.	Typ. ^[5]	Max.
CY62128DV30L	2.2	3.0	3.6	55/70	0.85	1.5	5	10	1.5	5
CY62128DV30LL				55/70	0.85	1.5	5	10	1.5	4

DC Electrical Characteristics (Over the Operating Range)

Parameter	Description	Test Conditions		CY62128DV30-55/70			Unit
				Min.	Typ. ^[5]	Max.	
V_{OH}	Output HIGH Voltage	$2.2 \leq V_{CC} \leq 2.7$	$I_{OH} = -0.1$ mA	2.0			V
		$2.7 \leq V_{CC} \leq 3.6$	$I_{OH} = -1.0$ mA	2.4			
V_{OL}	Output LOW Voltage	$2.2 \leq V_{CC} \leq 2.7$	$I_{OL} = 0.1$ mA			0.4	V
		$2.7 \leq V_{CC} \leq 3.6$	$I_{OL} = 2.1$ mA			0.4	
V_{IH}	Input HIGH Voltage	$2.2 \leq V_{CC} \leq 2.7$		1.8		$V_{CC} + 0.3$	V
		$2.7 \leq V_{CC} \leq 3.6$		2.2		$V_{CC} + 0.3$	
V_{IL}	Input LOW Voltage	$2.2 \leq V_{CC} \leq 2.7$		-0.3		0.6	V
		$2.7 \leq V_{CC} \leq 3.6$		-0.3		0.8	
I_{IX}	Input Leakage Current	$GND \leq V_I \leq V_{CC}$		-1		+1	μA
I_{OZ}	Output Leakage Current	$GND \leq V_O \leq V_{CC}$, Output Disabled		-1		+1	μA
I_{CC}	V_{CC} Operating Supply Current	$f = f_{MAX} = 1/t_{RC}$	$V_{CC} = 3.6V$, $I_{OUT} = 0mA$, CMOS level		5	10	mA
		$f = 1$ MHz			0.85	1.5	
I_{SB1}	Automatic CE Power-down Current – CMOS Inputs	$CE_1 \geq V_{CC} - 0.2V$, $CE_2 \leq 0.2V$, $V_{IN} \geq V_{CC} - 0.2V$, $V_{IN} \leq 0.2V$, $f = f_{MAX}$ (Address and Data Only), $f = 0$ (OE, WE,)	L		1.5	5	μA
			LL		1.5	4	
I_{SB2}	Automatic CE Power-down Current – CMOS Inputs	$CE_1 \geq V_{CC} - 0.2V$, $CE_2 \leq 0.2V$, $V_{IN} \geq V_{CC} - 0.2V$ or $V_{IN} \leq 0.2V$, $f = 0$, $V_{CC} = 3.6V$	L		1.5	5	μA
			LL		1.5	4	

Capacitance^[6]

Parameter	Description	Test Conditions	Max.	Unit
C_{IN}	Input Capacitance	$T_A = 25^\circ C$, $f = 1$ MHz	8	pF
C_{OUT}	Output Capacitance	$V_{CC} = V_{CC(typ)}$	8	pF

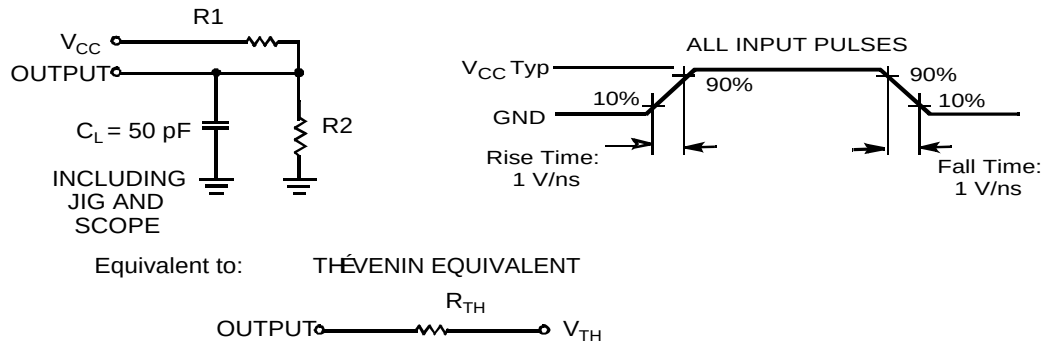
Notes:

- $V_{IL(min.)} = -2.0V$ for pulse durations less than 20 ns., $V_{IH(max.)} = V_{CC} + 0.75V$ for pulse durations less than 20 ns.
- Full device operation requires linear ramp of V_{CC} from 0V to $V_{CC(min)}$ and V_{CC} must be stable at $V_{CC(min)}$ for 500 μs .
- Typical values are included for reference only and are not guaranteed or tested. Typical values are measured at $V_{CC} = V_{CC(typ)}$, $T_A = 25^\circ C$.
- Tested initially and after any design or process changes that may affect these parameters.

Thermal Resistance

Parameter	Description	Test Conditions	SOIC	TSOP I	STSOP	Unit
θ_{JA}	Thermal Resistance (Junction to Ambient) ^[6]	Still Air, soldered on a 3 x 4.5 inch, two-layer printed circuit board	69	93	65	°C/W
θ_{JC}	Thermal Resistance (Junction to Case) ^[6]		34	17	15	°C/W

AC Test Loads and Waveforms

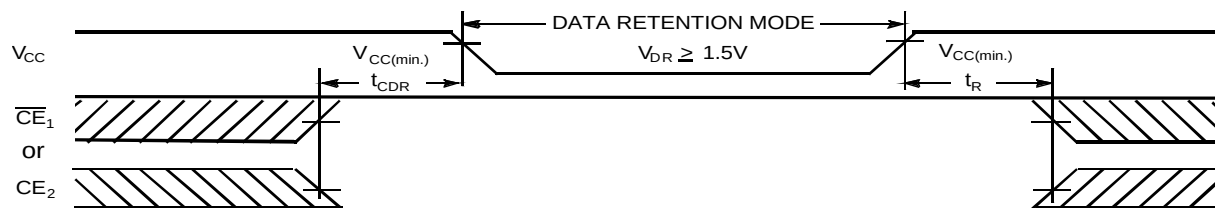


Parameters	2.5V (2.2 – 2.7V)	3.0V (2.7 – 3.6V)	Unit
R_1	16600	1103	Ω
R_2	15400	1554	Ω
R_{TH}	8000	645	Ω
V_{TH}	1.2	1.75	V

Data Retention Characteristics

Parameter	Description	Conditions	Min.	Typ. ^[5]	Max.	Unit
V_{DR}	V_{CC} for Data Retention		1.5			V
I_{CCDR}	Data Retention Current	$V_{CC} = 1.5V$, $CE_1 \geq V_{CC} - 0.2V$, $CE_2 \leq 0.2V$, $V_{IN} \geq V_{CC} - 0.2V$ or $V_{IN} \leq 0.2V$	L		4	μA
			LL		3	
$t_{CDR}^{[5]}$	Chip Deselect to Data Retention Time		0			ns
$t_R^{[7]}$	Operation Recovery Time		100			μs

Data Retention Waveform

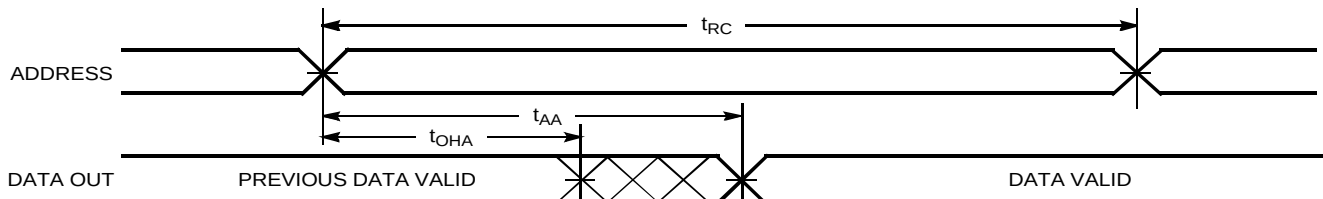


Note:

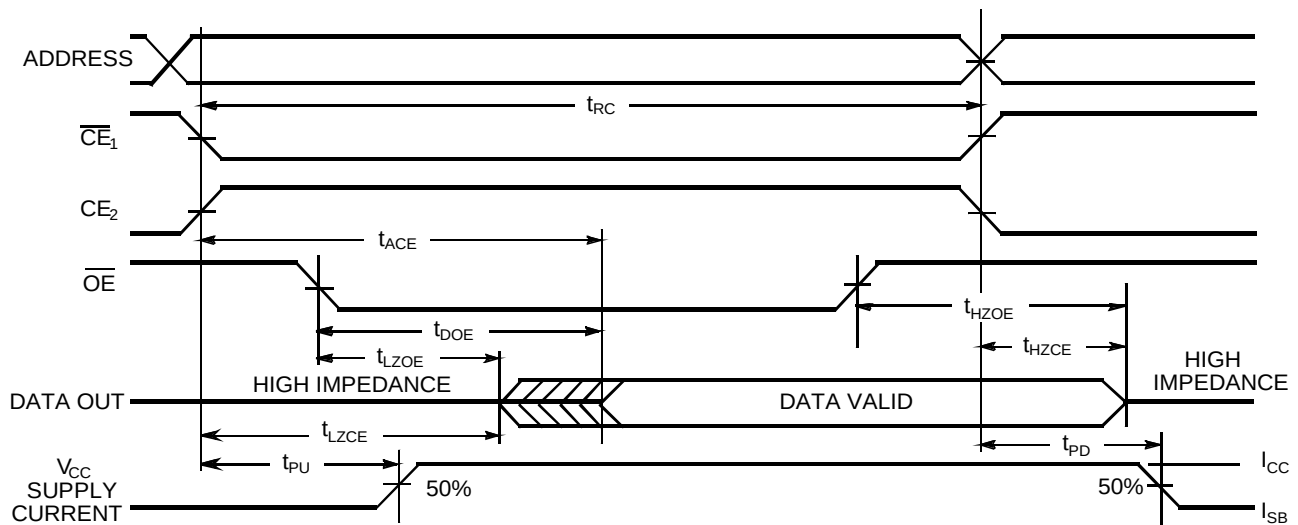
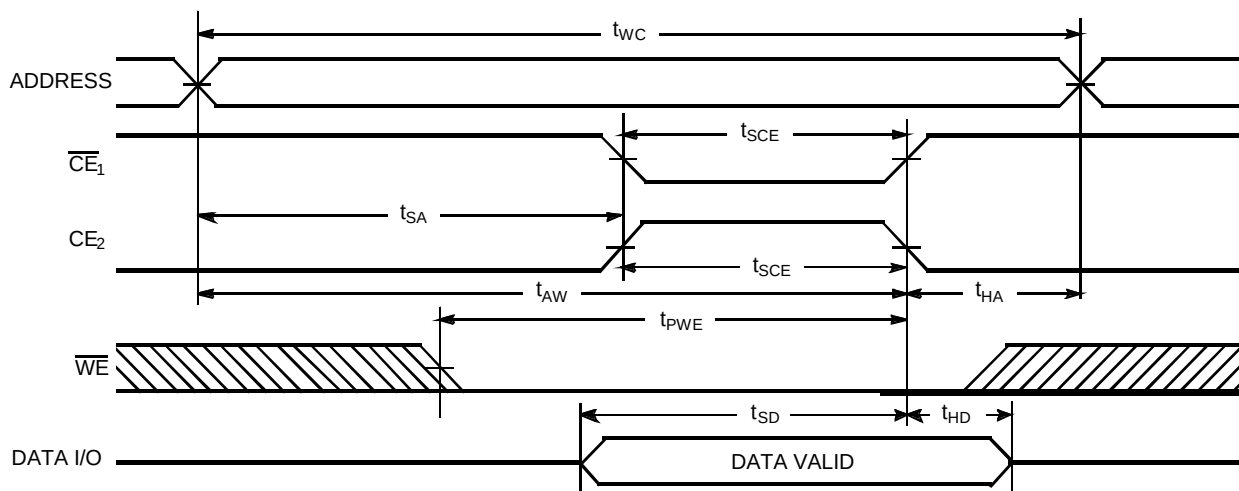
7. Full device operation requires linear V_{CC} ramp from V_{DR} to $V_{CC(min.)} > 100 \text{ us}$.

Switching Characteristics (Over the Operating Range)^[8]

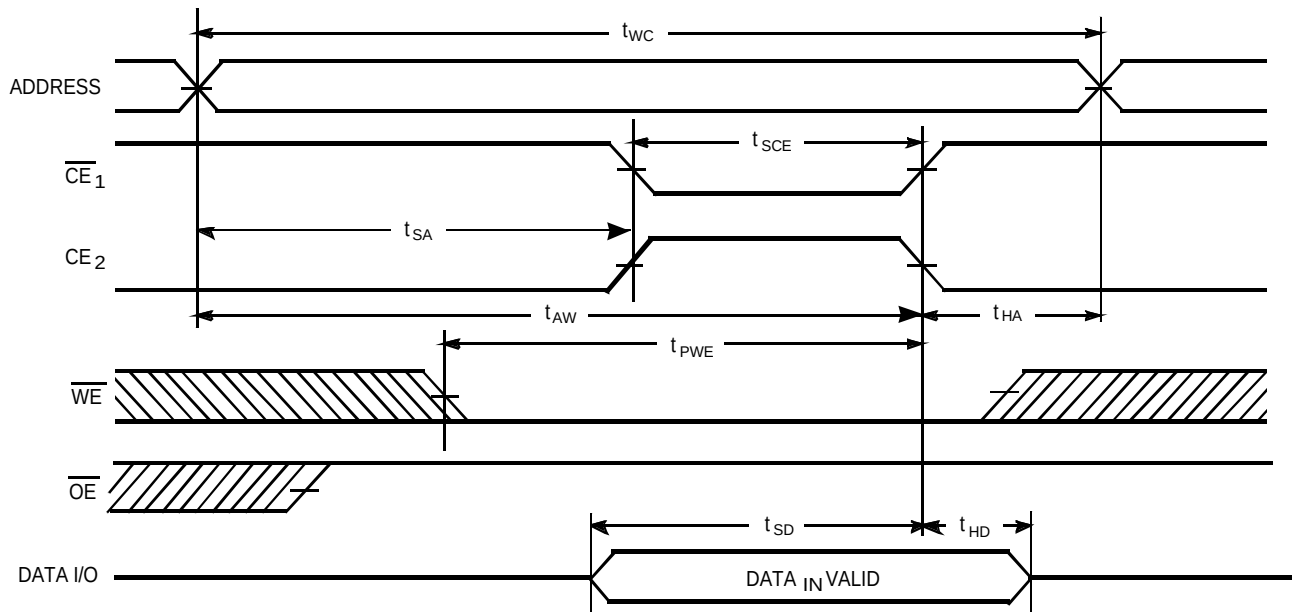
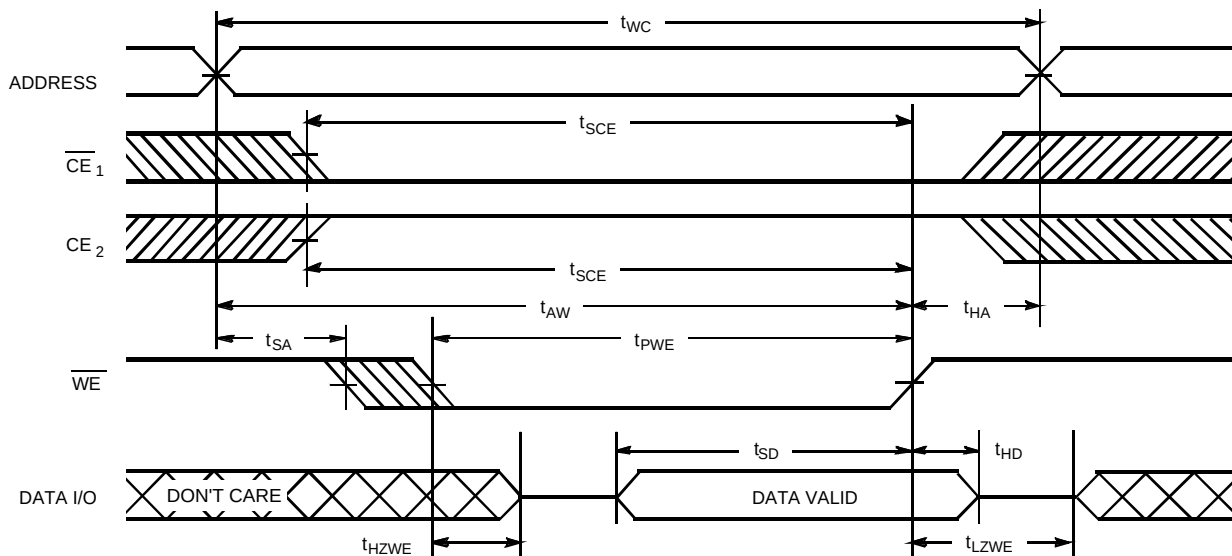
Parameter	Description	CY62128DV30-55		CY62128DV30-70		Unit
		Min.	Max.	Min.	Max.	
Read Cycle						
t _{RC}	Read Cycle Time	55		70		ns
t _{AA}	Address to Data Valid		55		70	ns
t _{OHA}	Data Hold from Address Change	10		10		ns
t _{ACE}	CE ₁ LOW or CE ₂ HIGH to Data Valid		55		70	ns
t _{DOE}	OE LOW to Data Valid		25		35	ns
t _{LZOE}	OE LOW to Low Z ^[9]	5		5		ns
t _{HZOE}	OE HIGH to High Z ^[9,10]		20		25	ns
t _{LZCE}	CE ₁ LOW or CE ₂ HIGH to Low Z ^[9]	10		10		ns
t _{HZCE}	CE ₁ HIGH or CE ₂ LOW to High Z ^[9,10]		20		25	ns
t _{PU}	CE ₁ LOW or CE ₂ HIGH to Power-up	0		0		ns
t _{PD}	CE ₁ HIGH or CE ₂ LOW to Power-down		55		70	ns
Write Cycle ^[11]						
t _{WC}	Write Cycle Time	55		70		ns
t _{SCE}	CE ₁ LOW or CE ₂ HIGH to Write End	40		60		ns
t _{AW}	Address Set-up to Write End	40		60		ns
t _{HA}	Address Hold from Write End	0		0		ns
t _{SA}	Address Set-up to Write Start	0		0		ns
t _{PWE}	WE Pulse Width	40		50		ns
t _{SD}	Data Set-up to Write End	25		30		ns
t _{HD}	Data Hold from Write End	0		0		ns
t _{HZWE}	WE LOW to High Z ^[9,10]		20		25	ns
t _{LZWE}	WE HIGH to Low Z ^[9]	10		10		ns

Switching Waveforms
Read Cycle No. 1 (Address Transition Controlled)^[12, 13]

Notes:

8. Test conditions assume signal transition time of 1V/ns or less, timing reference levels of $V_{CC(typ.)}/2$, input pulse levels of 0 to $V_{CC(typ.)}$, and output loading of the specified I_{OL} .
9. At any given temperature and voltage condition, t_{HZCE} is less than t_{LZCE} , t_{HZBE} is less than t_{LZBE} , t_{HZOE} is less than t_{LZOE} .
10. t_{HZOE} , t_{HZCE} , t_{HZBE} , and t_{HZWE} transitions are measured when the outputs enter a high-impedance state.
11. The internal write time of the memory is defined by the overlap of WE, $CE_1 = V_{IL}$, and $CE_2 = V_{IH}$. All signals.
12. Device is continuously selected. $\overline{OE}$, $CE_1 = V_{IL}$, $CE_2 = V_{IH}$.
13. WE is HIGH for Read cycle.

Switching Waveforms (continued)
Read Cycle No. 2 ($\overline{OE}$ Controlled) [10, 13, 14]

Write Cycle No. 1 ($\overline{WE}$ Controlled) [11, 15, 16, 17]

Notes:

14. Address valid prior to or coincident with $\overline{CE}_1$ transition LOW and CE_2 transition HIGH.
15. Data I/O is high-impedance if $OE = V_{IH}$.
16. If $\overline{CE}_1$ goes HIGH or CE_2 goes LOW simultaneously with $\overline{WE}$ HIGH, the output remains in a high-impedance state.
17. During the DON'T CARE period in the DATA I/O waveform, the I/Os are in output state and input signals should not be applied.

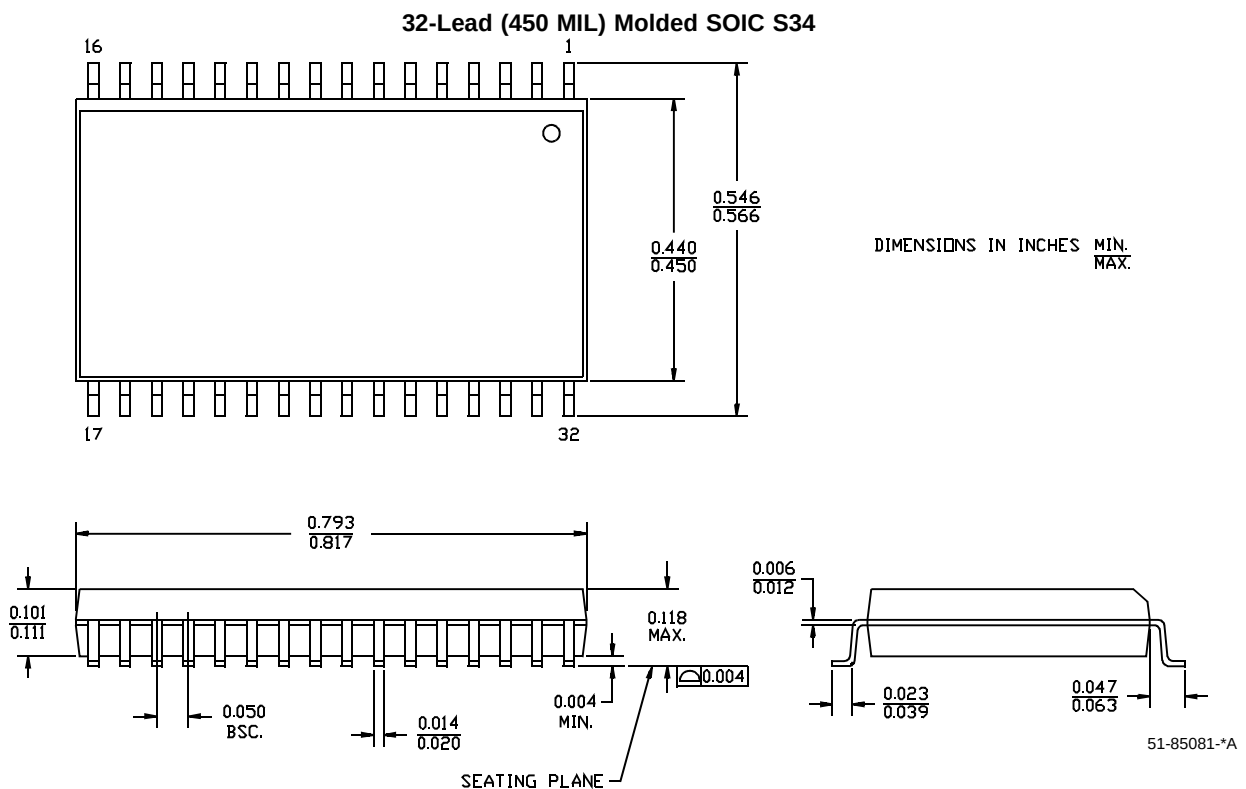
Switching Waveforms (continued)
Write Cycle No. 2 ($\overline{CE}</>_1</>$ or $\overline{CE}</>_2</>$ Controlled) [11, 15, 16, 17]

Write Cycle No. 3 ($\overline{WE}$ Controlled, $\overline{OE}$ LOW) [10, 16, 17]

Truth Table

$\overline{CE}_1$	$\overline{CE}_2$	$\overline{WE}$	$\overline{OE}$	I/O ₀ -I/O ₇	Mode	Power
H	X	X	X	High Z	Deselect/Power-down	Standby (I_{SB})
X	L	X	X	High Z	Deselect/Power-down	Standby (I_{SB})
L	H	H	L	Data Out	Read	Active (I_{CC})
L	H	H	H	High Z	Output Disabled	Active (I_{CC})
L	H	L	X	Data In	Write	Active (I_{CC})

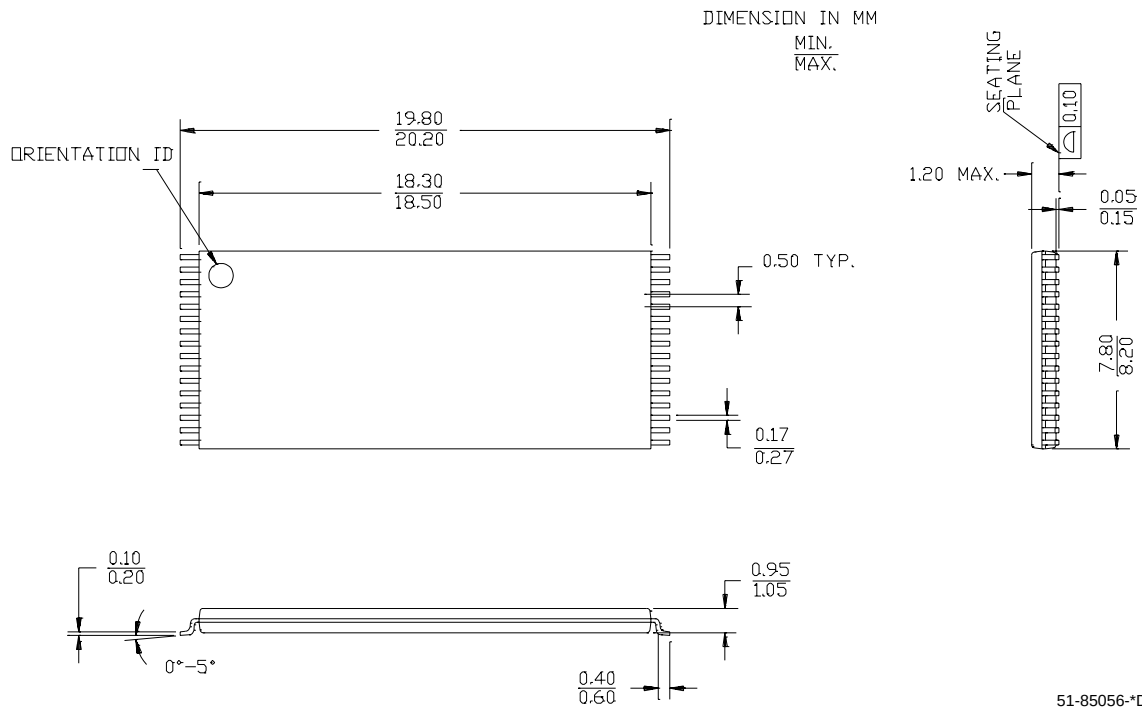
Ordering Information

Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
55	CY62128DV30L-55SI	S34	32-lead SOIC	Industrial
	CY62128DV30LL-55SI	S34	32-lead SOIC	
	CY62128DV30L-55ZI	Z32	32-lead TSOP Type 1	
	CY62128DV30LL-55ZI	Z32	32-lead TSOP Type 1	
	CY62128DV30L-55ZAI	ZA32	32-lead Short TSOP Type 1	
	CY62128DV30LL-55ZAI	ZA32	32-lead Short TSOP Type 1	
	CY62128DV30L-55ZRI	ZR32	32-lead Reverse TSOP Type 1	
	CY62128DV30LL-55ZRI	ZR32	32-lead Reverse TSOP Type 1	
70	CY62128DV30L-70SI	S34	32-lead SOIC	Industrial
	CY62128DV30LL-70SI	S34	32-lead SOIC	
	CY62128DV30L-70ZI	Z32	32-lead TSOP Type 1	
	CY62128DV30LL-70ZI	Z32	32-lead TSOP Type 1	
	CY62128DV30L-70ZAI	ZA32	32-lead Short TSOP Type 1	
	CY62128DV30LL-70ZAI	ZA32	32-lead Short TSOP Type 1	
	CY62128DV30L-70ZRI	ZR32	32-lead Reverse TSOP Type 1	
	CY62128DV30LL-70ZRI	ZR32	32-lead Reverse TSOP Type 1	

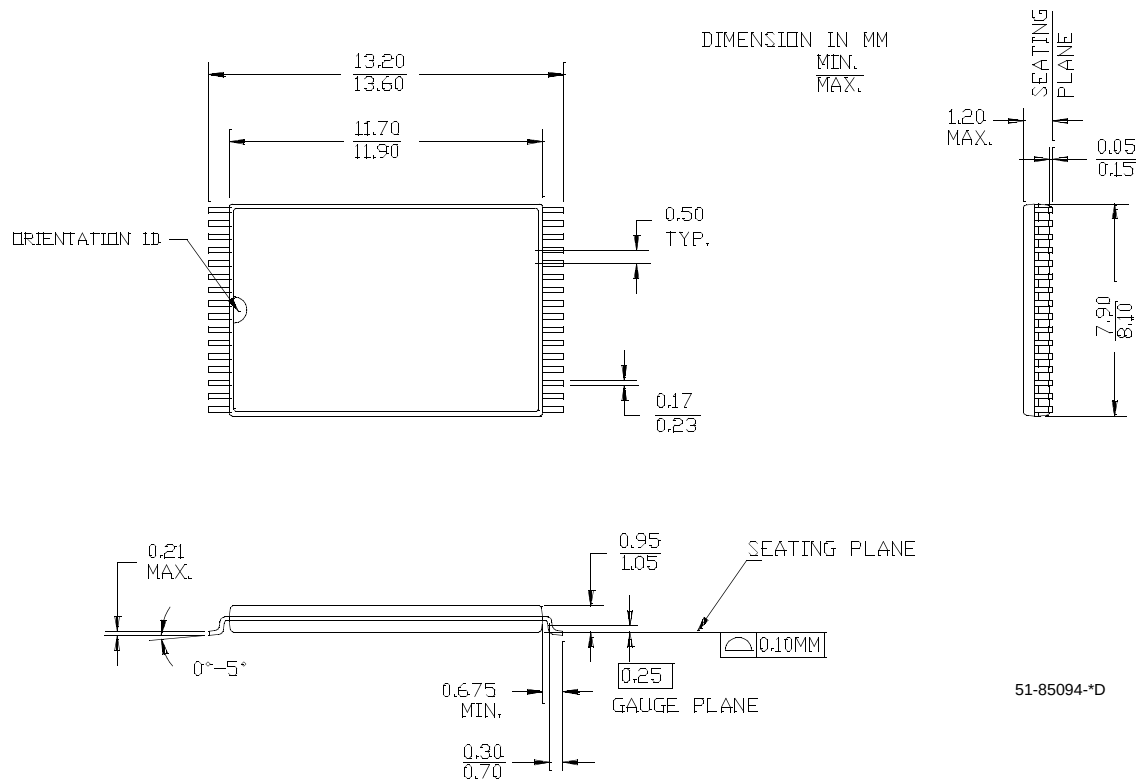
Package Diagrams

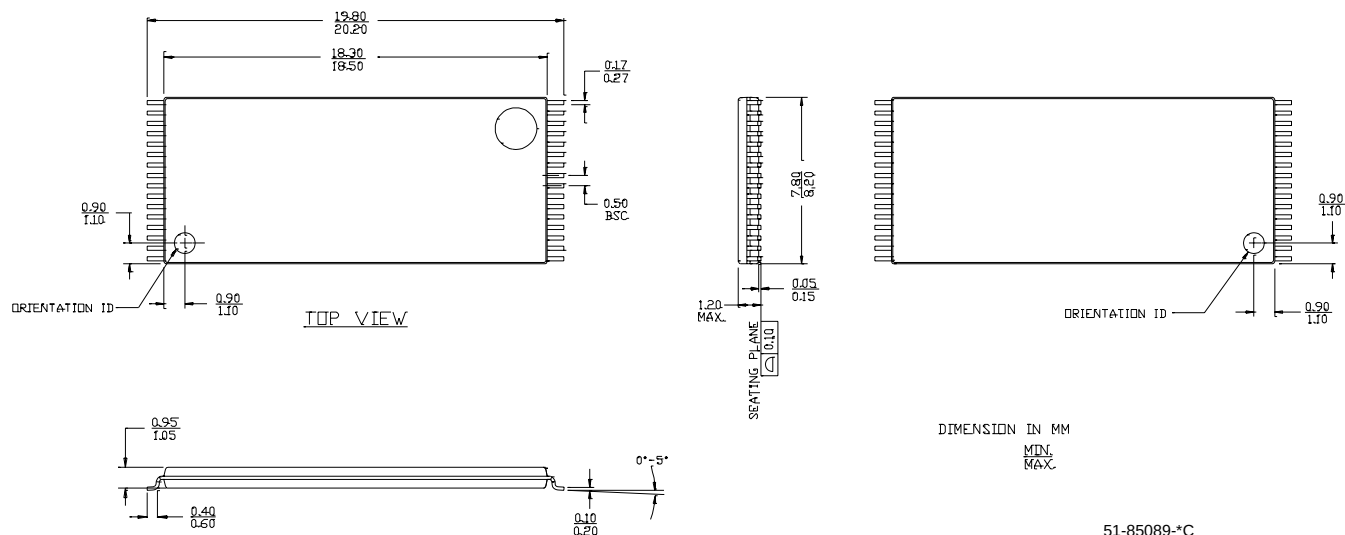


32-Lead Thin Small Outline Package Type I (8 x 20 mm) Z32



32-Lead Shrunk Thin Small Outline Package (8 x 13.4 mm) ZA32



32-Lead Reverse Thin Small Outline Package ZR32


MoBL is a registered trademark, and MoBL2 and More Battery Life are trademarks, of Cypress Semiconductor. All product and company names mentioned in this document are the trademarks of their respective holders.



Document History Page

Document Title: CY62128DV30 MoBL® 1 Mb (128K x 8) Static RAM				
Document Number: 38-05231				
REV.	ECN NO.	Issue Date	Orig. of Change	Description of Change
**	117691	08/27/02	JUI	New Data Sheet
*A	127314	5/27/03	MPR	Changed from Advance Information to Preliminary Changed Isb2 to 5 uA (L), 4 uA (LL) Changed lccdr to 4 uA (L), 3 uA (LL) Changed Cin from 6 pF to 8 pF
*B	128342	07/23/03	JUI	Changed from Preliminary to Final Add 70-ns speed, updated ordering information
*C	129002	08/29/03	CDY	Changed lcc 1 MHz typ from 0.5 mA to 0.85 mA