


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
FT	0	G		REVISED PER 0G3B-0438-02	7/31/02	SS

- NOTES:
- MATES WITH PLUG 207019-1.
 - CIRCUITS 1 THUR 8 COMMONED, 9 THRU 16 COMMONED, 17 THRU 24 COMMONED, 25 THRU 32 COMMONED AND 33 THRU 36 COMMONED TOGETHER.
 - ALL CURCUIITS COMMONED TOGETHER.
 - TIN OVER NICKEL PER QQ-N-290 OR COPPER PER MIL-C-14550.
 - 0.76 μ m (.000030) MIN GOLD PER MIL-G-45204 FOR A LENGTH OF 5.08 (.200) FROM MATING END, 3.81 μ m (.000150) MIN TIN PER MIL-T-10727 FOR A LENGTH OF 4.83 (.190) MIN. FROM OPPOSITE END, BOTH OVER 1.27 μ m (.000050) MIN NICKEL PER QQ-N-290.

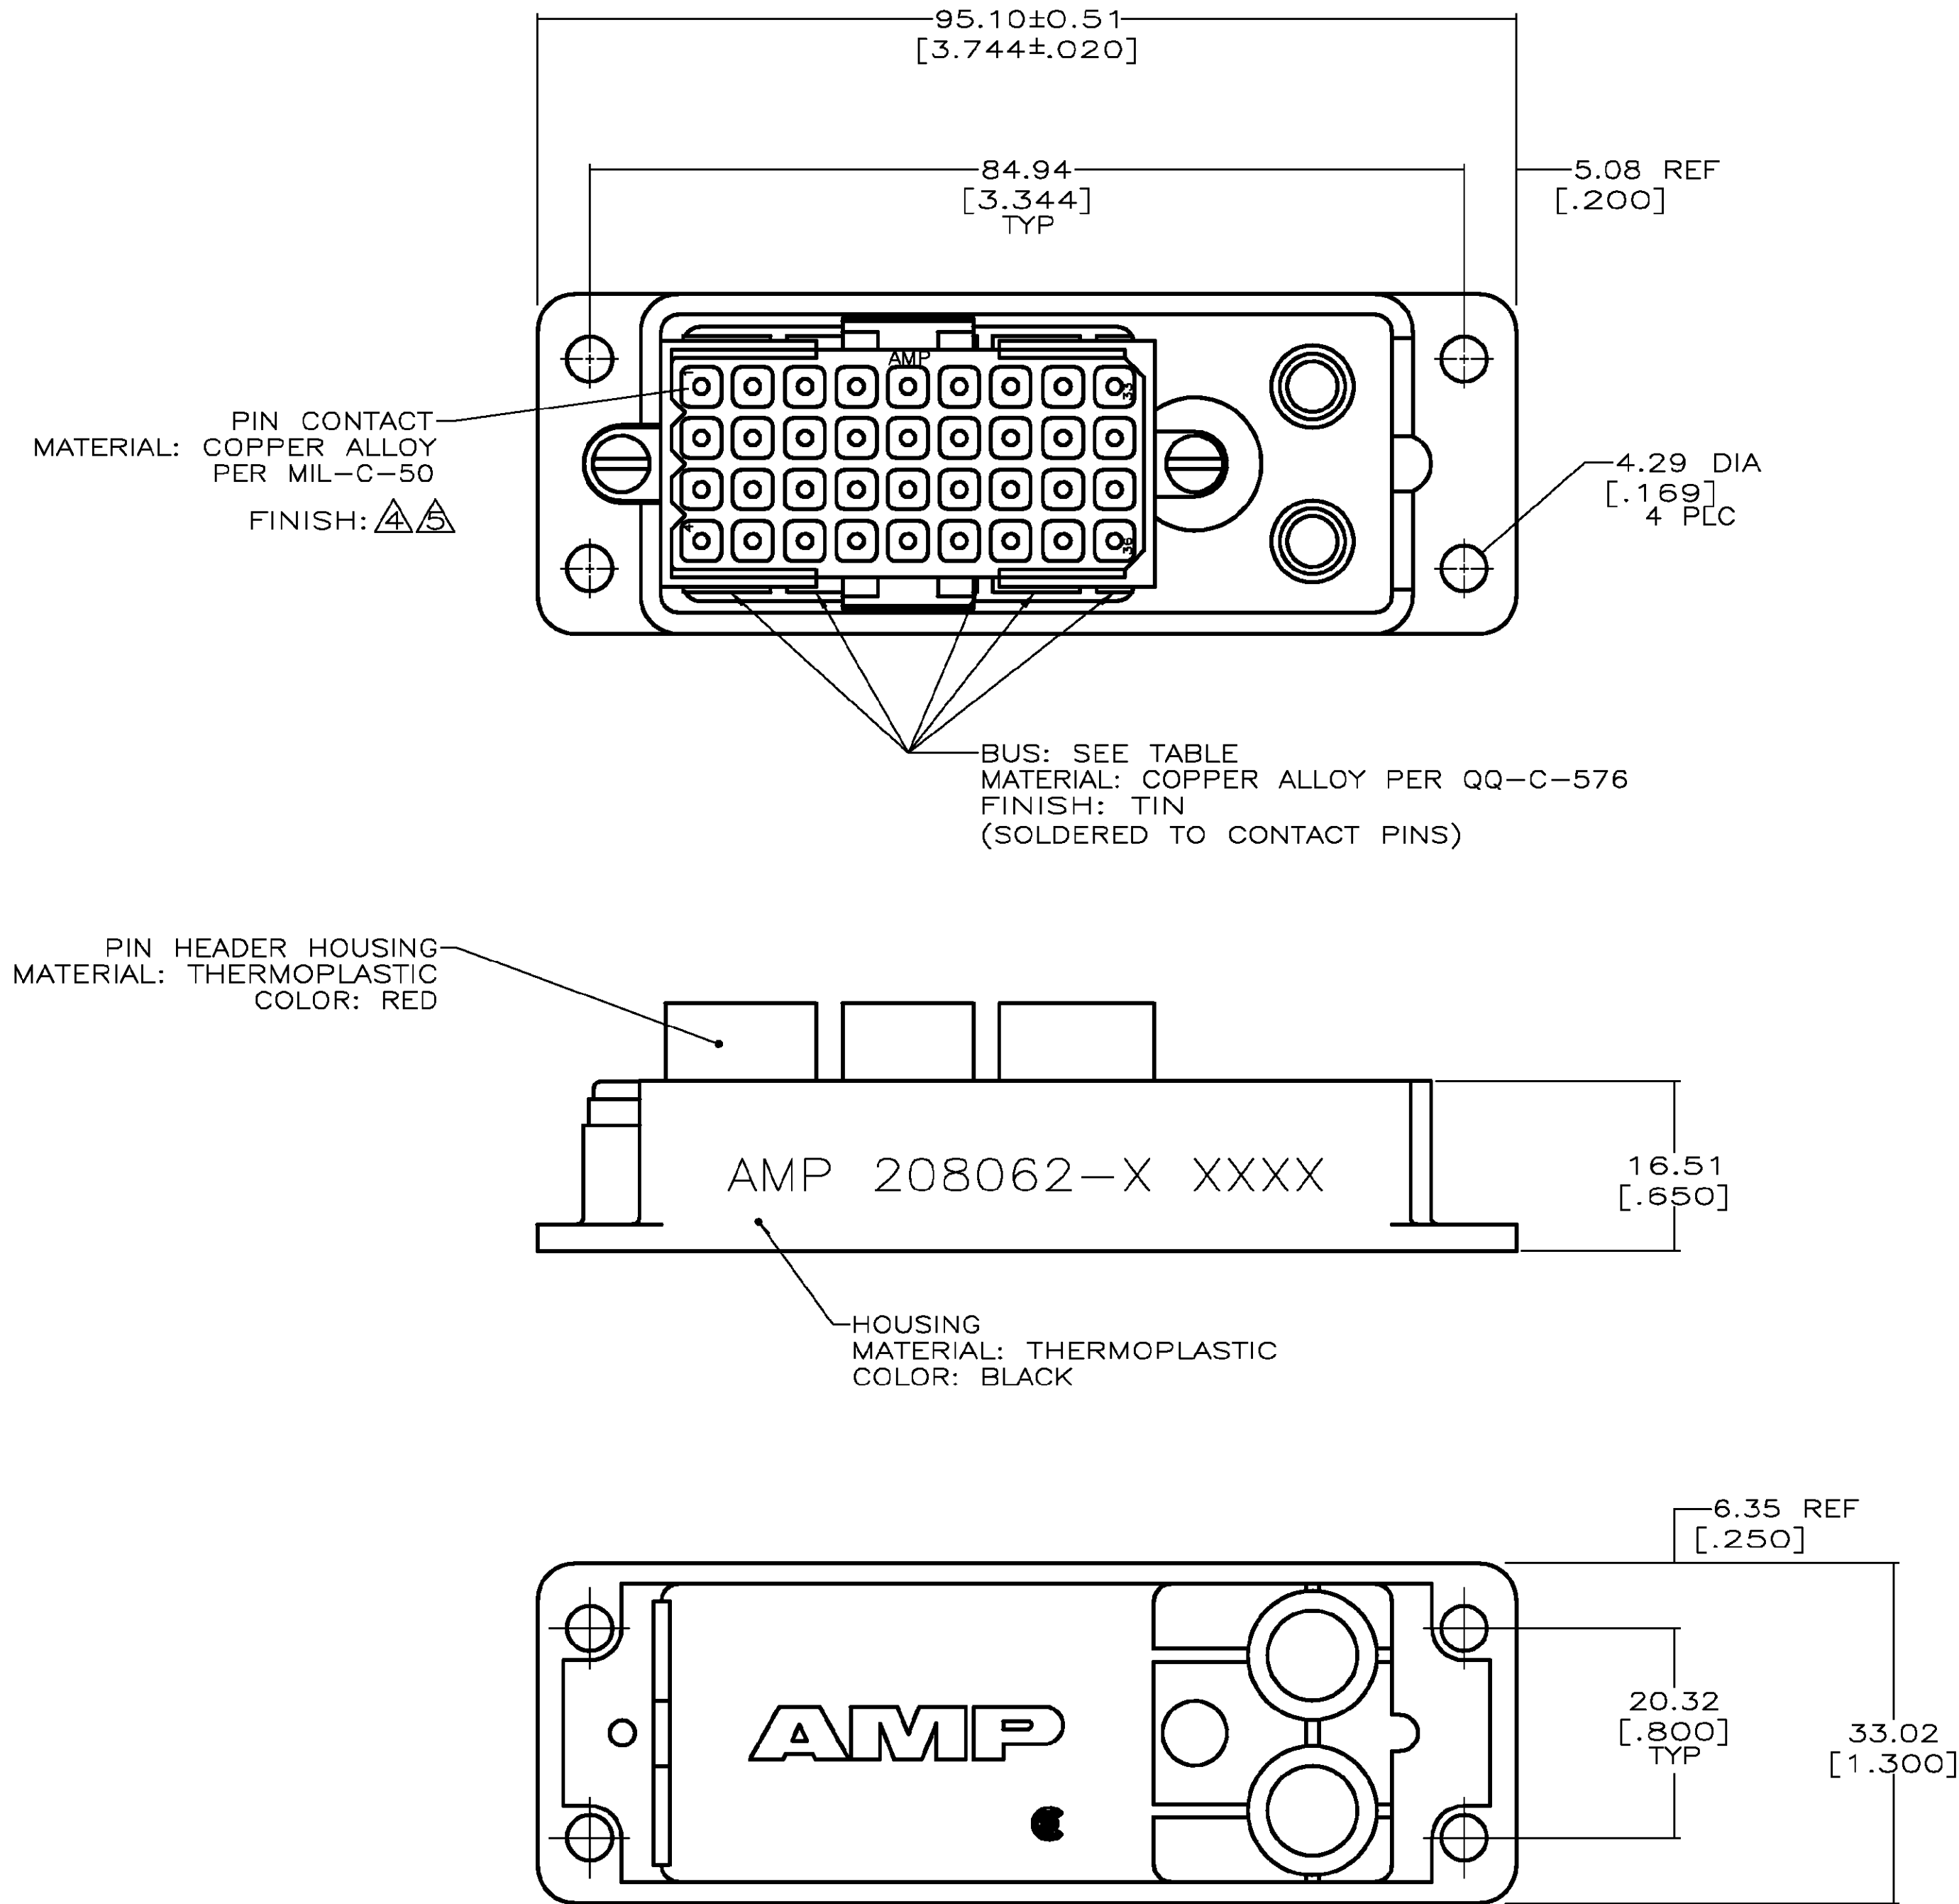

Δ	(1) 36 POSITION Δ	208062-7
Δ	(1) 4 POSN AND (4) 8 POSN Δ	208062-6
Δ	(1) 36 POSITION Δ	208062-3
Δ	(1) 4 POSN AND (4) 8 POSN Δ	208062-1
FINISH	BUS TYPE	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.GELTZ 08/13/02	Tyco Electronics Corporation Harrisburg, PA 17105	
DIMENSIONS: MM		CHK R.STONE 9-21-02	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	COMMONING DEVICE ASSEMBLY, 36 POSITION, METRIMATE	
0 PLC ± -		APPLICATION SPEC	-	
1 PLC ± -		WEIGHT	-	
2 PLC ± 0.25 [.010]		CUSTOMER DRAWING	-	
3 PLC ± -		SCALE	2:1	
4 PLC ± -		SHEET	1 OF 1	
ANGLES		REV	G	
FINISH				
SEE CALLOUTS				