

16-Bit 0.8V to 2.7V Scaled Configurable Level Shifting Transceiver with 3-State Outputs

Features

- PI74AUC164245 is designed for low voltage operation: 0.8V to 2.7V
- I_{OFF} supports partial Power-Down mode operation
- Drive Capability 16mA @ 2.5V
- Each supply rail is configurable over supply range
- ESD Protection exceeds JESD22
 - 2000V Human Body Model (A114-B)
 - 200V Machine Model (A115-A)
- Latch-up performance exceeds 100mA per JESD 78
- Industrial operation at -40°C to $+85^{\circ}\text{C}$
- Packaging (Pb-free & Green available):
 - 48-pin plastic 240-mil TSSOP (A)
 - 48-pin plastic 173-mil TVSOP (K)

Description

The PI74AUC164245 is a 16-bit (dual-octal) noninverting bus transceiver that contains two separate supply rails. B port (V_{CCB}) set to operate at 0.8 to 2.5V and A port (V_{CCA}) set to operate at 0.8 to 2.5V. This arrangement permits universal bidirectional translation over the voltage ranges.


The PI74AUC164245 is designed for asynchronous communication between data buses. Data is transmitted from the A bus to the B bus or vice versa, depending on the logic level at the direction control ($\overline{DIR}$) input. The output-enable ($\overline{OE}$) input is used to disable outputs so buses are isolated.

The control pins, $_1DIR$, $_2DIR$, $_1\overline{OE}$ and $_2\overline{OE}$ are supplied by V_{CCA} .

The device is fully specified for partial-power-down applications using I_{OFF} . The I_{OFF} circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

To ensure the high impedance state during power up or power down, the output-enable ($\overline{OE}$) input should be tied to V_{CC} through a pullup resistor, the minimum value of the resistor is determined by the current-sinking capability of the driver.

Block Diagram

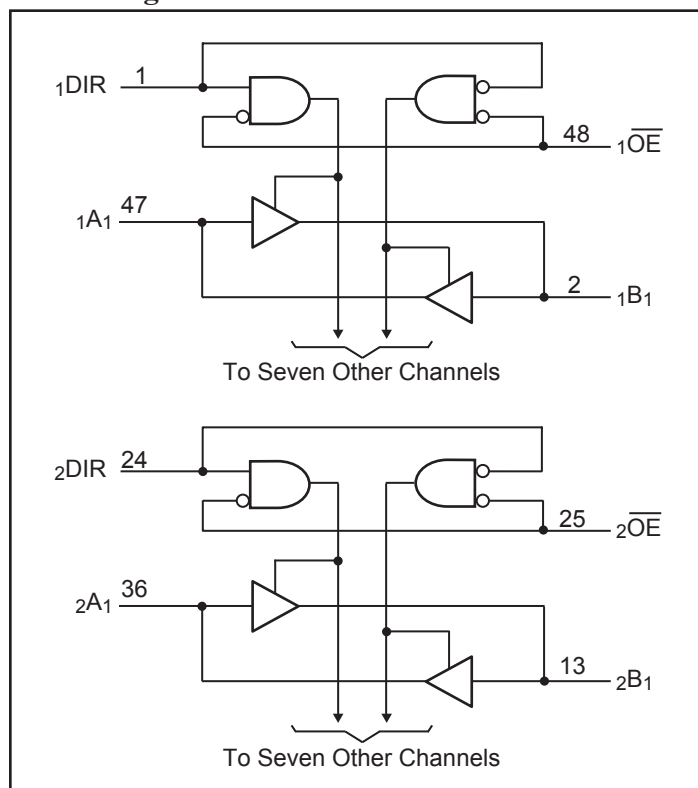

Maximum Ratings⁽¹⁾

(Absolute maximum ratings over operating free-air temperature range (unless otherwise noted))

Supply voltage range: V_{CCA} and V_{CCB}	-0.5V to 3.6V	Input clamp current, I_{IK} ($V_I < 0$).....	-50mA
Input Voltage Range, V_I ⁽²⁾ :		Output clamp current, I_{OK} ($V_O < 0$).....	-50mA
I/O port A	-0.5V to 3.6V	Continuous output current, I_O	±20mA
I/O port B	-0.5V to 3.6V	Continuous current through V_{CCA} , V_{CCB} or GND	±100mA
Control Inputs	-0.5V to 3.6V	Package thermal impedance, θ_{JA} ⁽⁴⁾ :	
Voltage Range applied to any output in the high-impedance or Power-Off state, V_O ⁽²⁾ :		A package.....	104°C/W
(A Port)	-0.5V to 3.6V	K package	107°C/W
(B Port)	-0.5V to 3.6V	Storage temperature range, T_{STG}	-65°C to 150°C
Voltage Range applied to any output in the high or Low state V_O ⁽³⁾ :			
(A Port)	-0.5V to $V_{CCA} + 0.5V$		
(B Port)	-0.5V to $V_{CCB} + 0.5V$		

Notes:

- Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
- The input negative voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.
- This value is limited to 3.6V max.
- The package thermal impedance is calculated in accordance with JESD 51.

Pin Configuration

1DIR	1	48	1OE
1B1	2	47	1A1
1B2	3	46	1A2
GND	4	45	GND
1B3	5	44	1A3
1B4	6	43	1A4
VCCB	7	42	VCCA
1B5	8	41	1A5
1B6	9	40	1A6
GND	10	39	GND
1B7	11	38	1A7
1B8	12	37	1A8
2B1	13	36	2A1
2B2	14	35	2A2
GND	15	34	GND
2B3	16	33	2A3
2B4	17	32	2A4
VCCB	18	31	VCCA
2B5	19	30	2A5
2B6	20	29	2A6
GND	21	28	GND
2B7	22	27	2A7
2B8	23	26	2A8
2DIR	24	25	2OE

Pin Description

Pin Name	Description
$\overline{xOE}$	3-State Output Enable Inputs (Active LOW)
$\overline{xDIR}$	Direction Control Input
$\overline{xAX}$	Side A Inputs or 3-state Outputs
$\overline{xBX}$	Side B Inputs or 3-state Outputs
GND	Ground
VCC	Power

Truth Table (each 8-bit section)

Inputs		Operation
OE	DIR	
L	L	B data to A bus
L	H	A data to B bus
H	X	Z (Isolation)

Notes:

H = HIGH Signal Level, L = LOW Signal Level,
X = Don't Care or Irrelevant, Z = High Impedance

Recommended Operating Conditions⁽¹⁾

Parameter	Description		V _{CCI} ⁽²⁾	V _{CCO} ⁽³⁾	Min.	Max.	Units
V _{CCA}	Supply Voltage				0.8	2.7	V
V _{CCB}	Supply Voltage				0.8	2.7	
V _{IH}	High-Level Input Voltage	Data Inputs	0.8V		V _{CCI}		
			1.1V to 1.95V		0.65 x V _{CCI}		
			2.3V to 2.7V		1.7		
V _{IL}	Low-Level Input Voltage	Data Inputs	0.8V			0	
			1.1V to 1.95V			0.35 x V _{CCI}	
			2.3V to 2.7V			0.7	
V _{IH}	High-Level Input Voltage	Control Inputs (Referenced to V _{CCA})	0.8V		V _{CCA}		
			1.1V to 1.95V		0.65 x V _{CCA}		
			2.3V to 2.7V		1.7		
V _{IL}	Low-Level Input Voltage	Control Inputs (Referenced to V _{CCA})	0.8V			0	
			1.1V to 1.95V			0.35 x V _{CCA}	
			2.3V to 2.7V			0.7	
V _I	Input Voltage				0	2.7V	
V _O	Output Voltage	Active State			0	V _{CCO}	
		3-State			0	2.7V	
I _{OH}	High-Level output Current			0.8V		-0.7	mA
				1.1V		-3	
				1.4V		-5	
				1.65V		-8	
				2.3V		-9	
I _{OL}	Low-Level output Current			0.8V		0.7	
				1.1V		3	
				1.4V		5	
				1.65V		8	
				2.3V		9	
Δt/Δv	Input transition rise or fall rate					5	ns/V
T _A	Operating Free-Air Temperature				-40	85	°C

Notes:

1. All unused data inputs of the device must be held at V_{CCI} or GND to ensure proper data device operation.
2. V_{CCI} is the V_{CC} (either V_{CCA} or V_{CCB}) associated with the data input port.
3. V_{CCO} is the V_{CC} (either V_{CCA} or V_{CCB}) associated with the data output port.

Electrical Characteristics (A Port or B Port) (Over recommended operating free-air temperature range)

Parameters		Test Conditions		V _{CCI} ⁽¹⁾	V _{CCO} ⁽²⁾	Min.	Typ. ⁽³⁾	Max.	Units
V _{OH}		I _{OH} = - 100μA	V _I = V _{IH}	0.8V - 2.7V	0.8V - 2.7V	V _{CCO} - 0.1V			V
		I _{OH} = - 0.7mA	V _I = V _{IH}	0.8V - 2.7V	0.8V		0.55		
		I _{OH} = - 3mA	V _I = V _{IH}	0.8V - 2.7V	1.1V	0.8			
		I _{OH} = - 5mA	V _I = V _{IH}	0.8V - 2.7V	1.4V	1.0			
		I _{OH} = - 8mA	V _I = V _{IH}	0.8V - 2.7V	1.65V	1.2			
		I _{OH} = - 9mA	V _I = V _{IH}	0.8V - 2.7V	2.3V	1.8			
V _{OL}		I _{OH} = 100μA	V _I = V _{IL}	0.8V - 2.7V	0.8V - 2.7V			0.2	
		I _{OH} = 0.7mA	V _I = V _{IL}	0.8V - 2.7V	0.8V		0.25		
		I _{OH} = 3mA	V _I = V _{IL}	0.8V - 2.7V	1.1V			0.3	
		I _{OH} = 5mA	V _I = V _{IL}	0.8V - 2.7V	1.4V			0.4	
		I _{OH} = 8mA	V _I = V _{IL}	0.8V - 2.7V	1.65V			0.45	
		I _{OH} = 9mA	V _I = V _{IL}	0.8V - 2.7V	2.3V			0.6	
I _I	Control Inputs	V _I = V _{CCA} or GND, V _{CCA} = 0 to 2.7V						±5	μA
I _{off}		V _I = 0 to 2.7V		0V	0V - 2.7V			±10	
		V _O = 0 to 2.7V		0V - 2.7V	0V			±10	
I _{OZ} ⁽⁴⁾		V _O = V _{CCO} or GND	$\overline{\text{OE}}$ = V _{IH}	0.8V - 2.7V	0.8V - 2.7V			±10	
			$\overline{\text{OE}}$ = Don't care	0.8V - 2.7V	0V			±10	
I _{CC}		V _I = V _{CCI} or GND, I _O = 0		0.8V - 2.7V	0.8V - 2.7V			20	pF
C _I	Control Inputs	V _I = 2.5V or GND		2.5V	2.5V		4		
C _{IO}	I/O Ports	V _O = 2.5V or GND		2.5V	2.5V		5		

Notes:

1. V_{CCI} is the V_{CC} (either V_{CCA} or V_{CCB}) associated with the input port.
2. V_{CCO} is the V_{CC} (either V_{CCA} or V_{CCB}) associated with the output port.
3. All typical values are at T_A = 25°C
4. For I/O ports, the parameter I_{OZ} includes the input leakage current.

Switching Characteristics (Over recommended operating free-air temperature range for V_{CCA} = 0.8 V (See Figure 1)

Parameter	From (Input)	To (Output)	V _{CCB} = 0.8V	V _{CCB} = 1.2 ±0.1V	Units
			Typ.	Typ.	
t _{pd}	A	B	8.5	5.0	ns
	B	A	8.5	7.5	
t _{en}	$\overline{OE}$	A	8.0	8.0	
	$\overline{OE}$	B	9.0	5.0	
t _{dis}	$\overline{OE}$	A	8.5	8.5	
	$\overline{OE}$	B	9.0	6.8	

Switching Characteristics (Over recommended operating free-air temperature range for $V_{CCA} = 1.2V \pm 0.1V$ (See Figure 1))

Param- eter	From (Input)	To (Output)	$V_{CCB} = 0.8V$	$V_{CCB} = 1.2 \pm 0.1V$		$V_{CCB} = 1.5 \pm 0.1V$		$V_{CCB} = 1.8 \pm 0.15V$			$V_{CCB} = 2.5 \pm 0.2V$		Units
			Typ.	Min.	Max.	Min.	Max.	Min.	Typ.	Max.	Min.	Max.	
t_{pd}	A	B	8	1	4.5	0.5	3.5	0.5	2	3.5	0.5	3	ns
	B	A	5	1	4.5	0.5	4.0	0.5	3	4.0	0.5	3.5	
t_{en}	$\overline{OE}$	A	3.2	0.7	4.6	0.7	4.6	0.7	3.2	4.6	0.7	4.6	
	$\overline{OE}$	B	8	0.7	4.6	0.7	3.6	0.7	2.2	3.6	0.7	3.5	
t_{dis}	$\overline{OE}$	A	4.6	0.8	6.2	0.8	6.2	0.8	4.6	6.2	0.8	6.2	
	$\overline{OE}$	B	9	0.8	6.2	0.8	5	0.8	3.5	4.8	0.8	4.3	

Switching Characteristics (Over recommended operating free-air temperature range for $V_{CCA} = 1.5V \pm 0.1V$ (See Figure 1))

Param- eter	From (Input)	To (Output)	$V_{CCB} = 1.2 \pm 0.1V$		$V_{CCB} = 1.5 \pm 0.1V$		$V_{CCB} = 1.8 \pm 0.15V$			$V_{CCB} = 2.5 \pm 0.2V$		Units
			Min.	Max.	Min.	Max.	Min.	Typ.	Max.	Min.	Max.	
t_{pd}	A	B	0.5	4.5	0.5	3.3	0.5	2.3	3.1	0.5	2.6	ns
	B	A	0.5	3.5	0.5	3.3	0.5	2	3	0.5	2.8	
t_{en}	$\overline{OE}$	A	0.7	3.3	0.7	3.1	0.7	2.3	3.3	0.7	3.3	
	$\overline{OE}$	B	0.7	4.3	0.7	3.1	0.7	2.3	3.3	0.7	3.2	
t_{dis}	$\overline{OE}$	A	0.8	4.5	0.8	4.7	0.8	3	4.5	0.8	4.5	
	$\overline{OE}$	B	0.8	5.5	0.8	4.7	0.8	3	4.5	0.8	3.7	

Switching Characteristics (Over recommended operating free-air temperature range for $V_{CCA} = 1.8V \pm 0.15V$ (See Figure 1))

Param- eter	From (Input)	To (Output)	$V_{CCB} = 1.2 \pm 0.1V$		$V_{CCB} = 1.5 \pm 0.1V$		$V_{CCB} = 1.8 \pm 0.15V$			$V_{CCB} = 2.5 \pm 0.2V$		Units
			Min.	Max.	Min.	Max.	Min.	Typ.	Max.	Min.	Max.	
t_{pd}	A	B	0.5	4.2	0.5	3	0.5	2	2.8	0.5	2.5	ns
	B	A	0.5	3.5	0.5	3.1	0.5	2	2.8	0.5	2.6	
t_{en}	$\overline{OE}$	A	0.7	3	0.7	3	0.7	2.1	3	0.7	3	
	$\overline{OE}$	B	0.7	4	0.7	3	0.7	2.1	3	0.7	2.8	
t_{dis}	$\overline{OE}$	A	0.8	4.3	0.8	4.3	0.8	3.2	4.3	0.8	4.3	
	$\overline{OE}$	B	0.8	5.3	0.8	4.3	0.8	3.2	4.3	0.8	3	

Switching Characteristics (Over recommended operating free-air temperature range for $V_{CCA} = 2.5V \pm 0.2V$ (See Figure 1)

Parameter	From (Input)	To (Output)	$V_{CCB} = 1.2 \pm 0.1V$		$V_{CCB} = 1.5 \pm 0.1V$		$V_{CCB} = 1.8 \pm 0.15V$			$V_{CCB} = 2.5 \pm 0.2V$		Units
			Min.	Max.	Min.	Max.	Min.	Typ.	Max.	Min.	Max.	
t_{pd}	A	B	0.5	4	0.5	2.8	0.5	1.8	2.6	0.5	2.2	ns
	B	A	0.5	3	0.5	2.6	0.5	1.7	2.5	0.5	2.2	
t_{en}	$\overline{OE}$	A	0.7	2.6	0.7	2.6	0.7	1.8	2.6	0.7	2.6	
	$\overline{OE}$	B	0.7	4	0.7	2.8	0.7	2	3.1	0.7	2.6	
t_{dis}	$\overline{OE}$	A	0.8	2.9	0.8	2.9	0.8	2	2.9	0.8	2.9	
	$\overline{OE}$	B	0.8	5.3	0.8	4.1	0.8	3	4.3	0.8	2.9	

Operating Characteristics (V_{CCA} and $V_{CCB} = 2.5V$, $T_A = 25^\circ C$)

Parameter			Test Conditions	Typ.	Units
Cpd (V_{CCA})	Power Dissipation Capacitance A to B	Outputs Enabled	$C_L = 0$ $f = 10 \text{ MHz}$	3	pF
		Outputs Disabled		0.4	
	Power Dissipation Capacitance B to A	Outputs Enabled		14	
		Outputs Disabled		1.5	
Cpd (V_{CCB})	Power Dissipation Capacitance A to B	Outputs Enabled	$C_L = 0$ $f = 10 \text{ MHz}$	14	
		Outputs Disabled		1.5	
	Power Dissipation Capacitance B to A	Outputs Enabled		3	
		Outputs Disabled		0.4	

Parameter Measurement Information

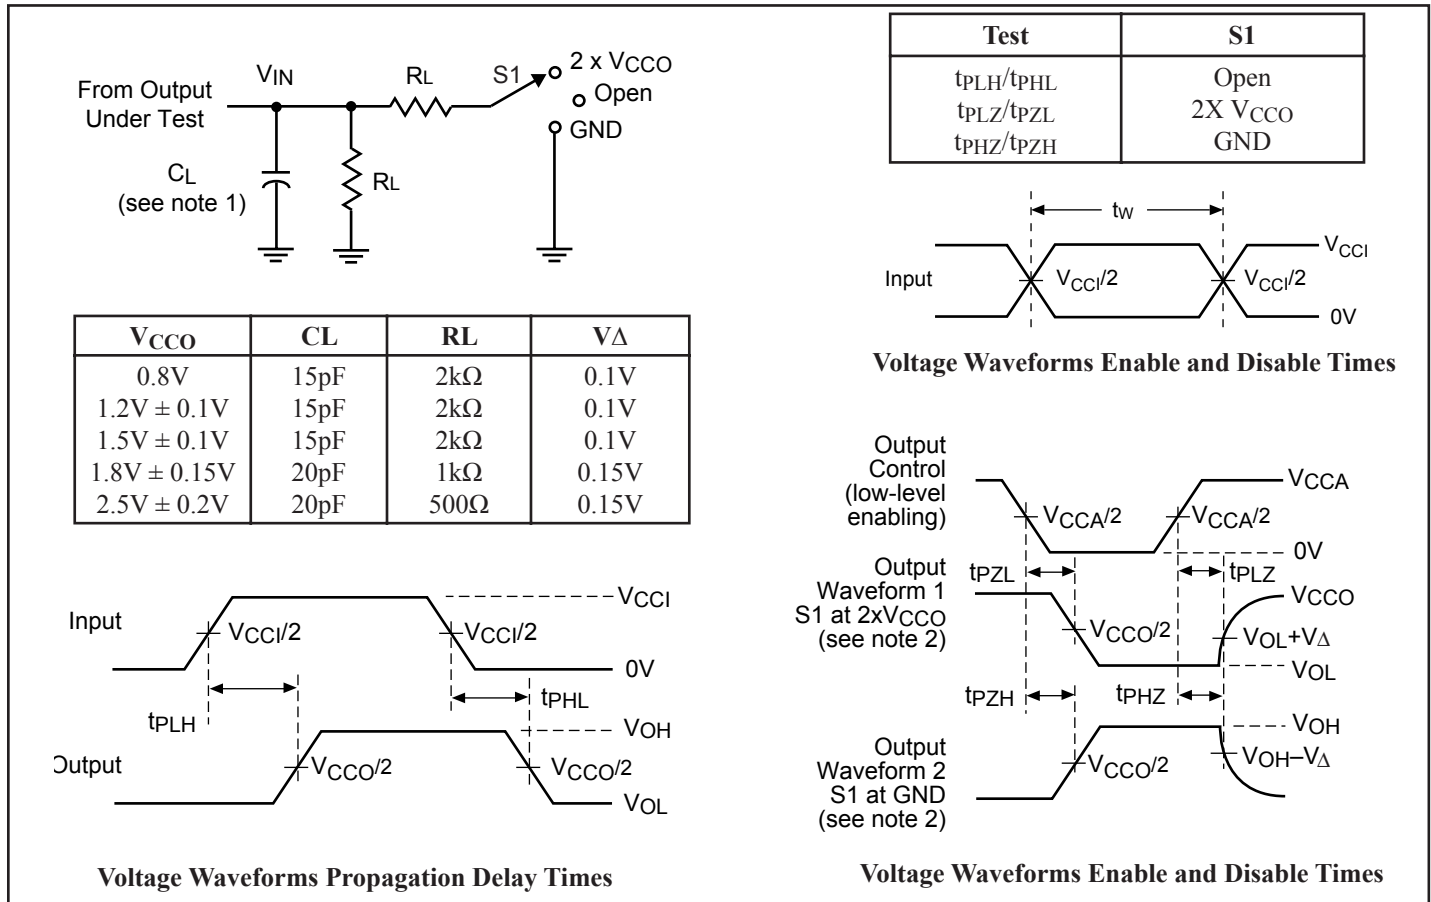
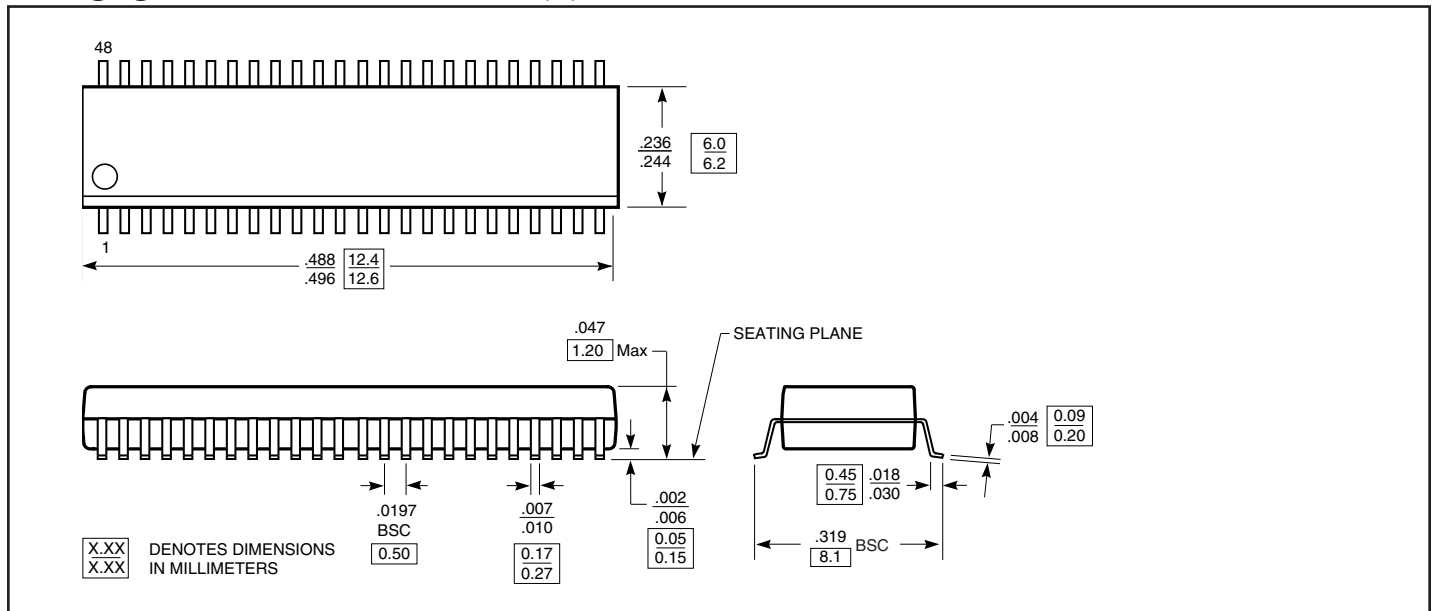
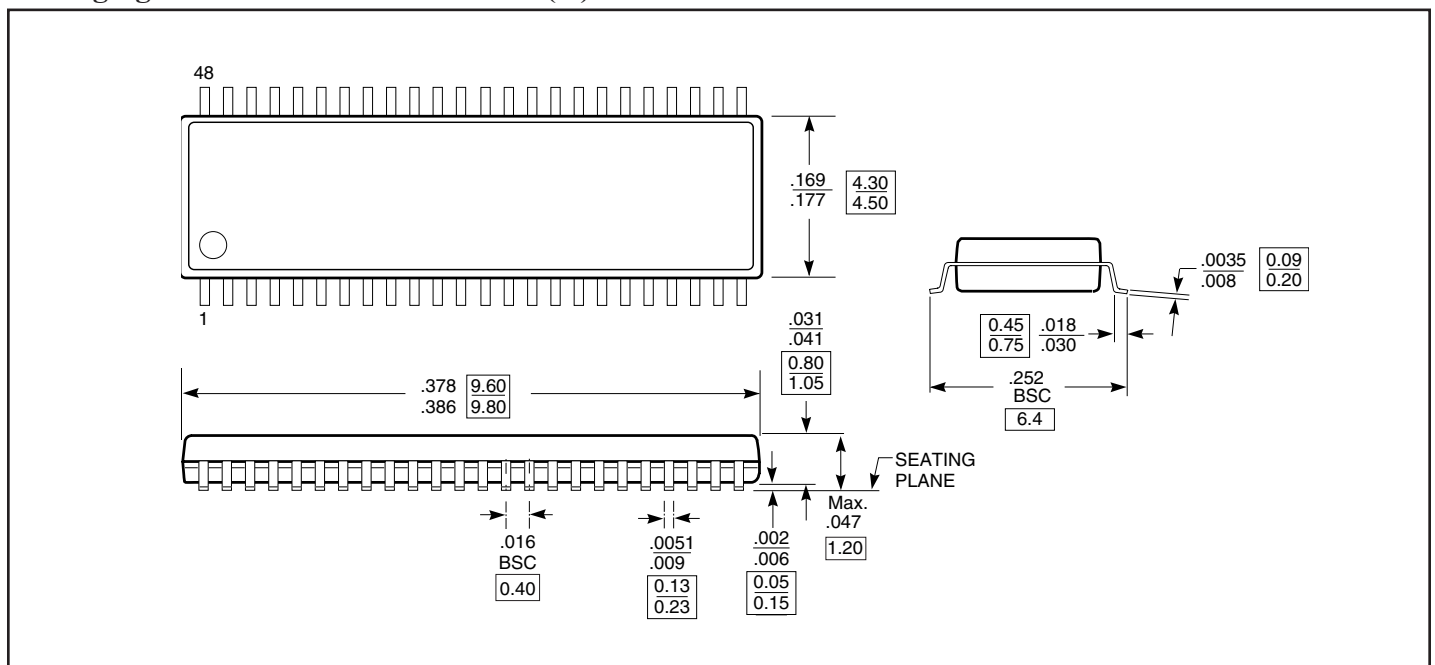


Figure 1. Load Circuit and Voltage Waveforms

Notes:

- CL includes probe and jig capacitance.
 - Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- All input pulses are supplied by generators having the following characteristics: PRR ≤ 10Mz, Z_O = 50Ω, Slow rate ≥ 1V/ns.
 - The outputs are measured one at a time with one transition per measurement.
 - t_{PLZ} and t_{PZH} are the same as t_{DIS}.
 - t_{PZL} and t_{PZH} are the same as t_{EN}.
 - t_{PLH} and t_{PHL} are the same as t_{PD}.
 - V_{CCI} defines the input port.
 - V_{CCO} defines the output port.

Packaging Mechanical: 48-Pin TSSOP (A)

Packaging Mechanical: 48-Pin TVSOP (K)


Ordering Information

Ordering Code	Package Code	Package Description
PI74AUC164245A	A	48-pin, 240-mil wide plastic TSSOP
PI74AUC164245AE	A	Pb-free & Green, 48-pin, 240-mil wide plastic TSSOP
PI74AUC164245K	K	48-pin, 173-mil wide plastic TVSOP
PI74AUC164245KE	K	Pb-free & Green, 48-pin, 173-mil wide plastic TVSOP

Notes:

- Thermal characteristics can be found on the company web site at www.pericom.com/packaging/
- E = Pb-free & Green
- Adding an X suffix = Tape/Reel