




.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE

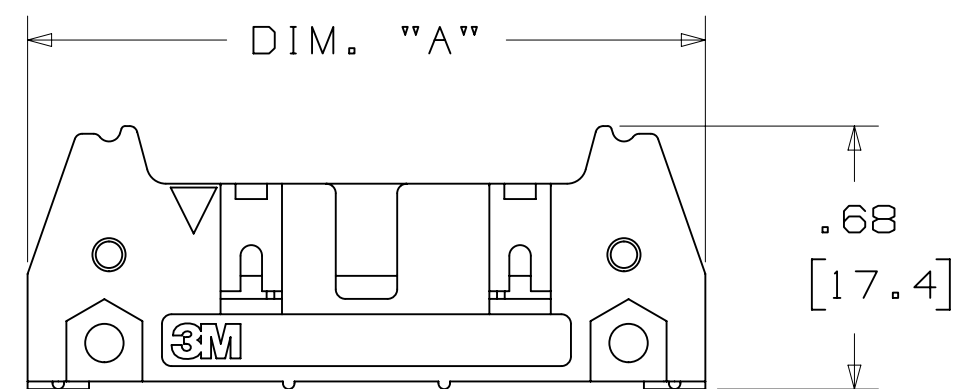

-X0XX
HEADER WITHOUT LATCH EJECTOR

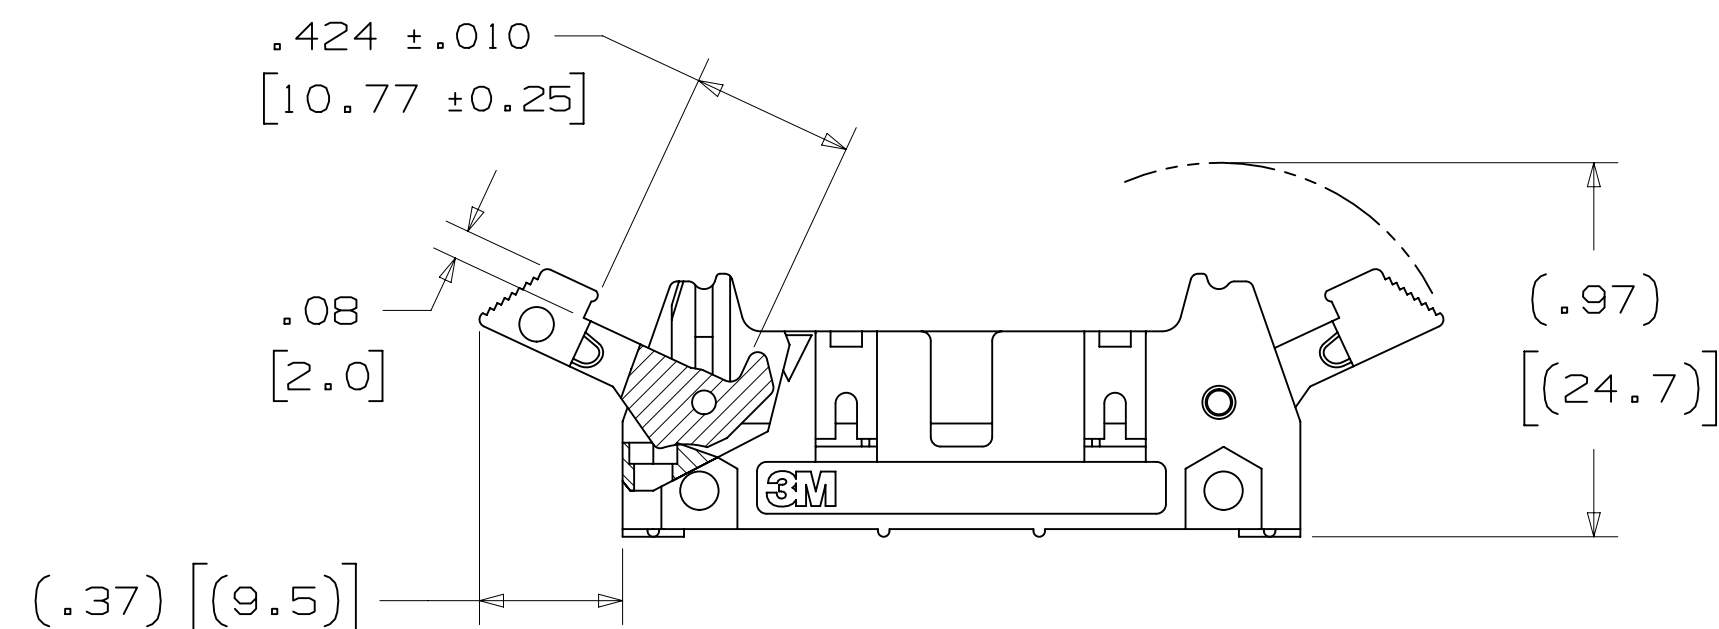

-X2XX
HEADER WITH SHORT LATCH EJECTOR
FOR 3M SOCKETS WITHOUT STRAIN RELIEF

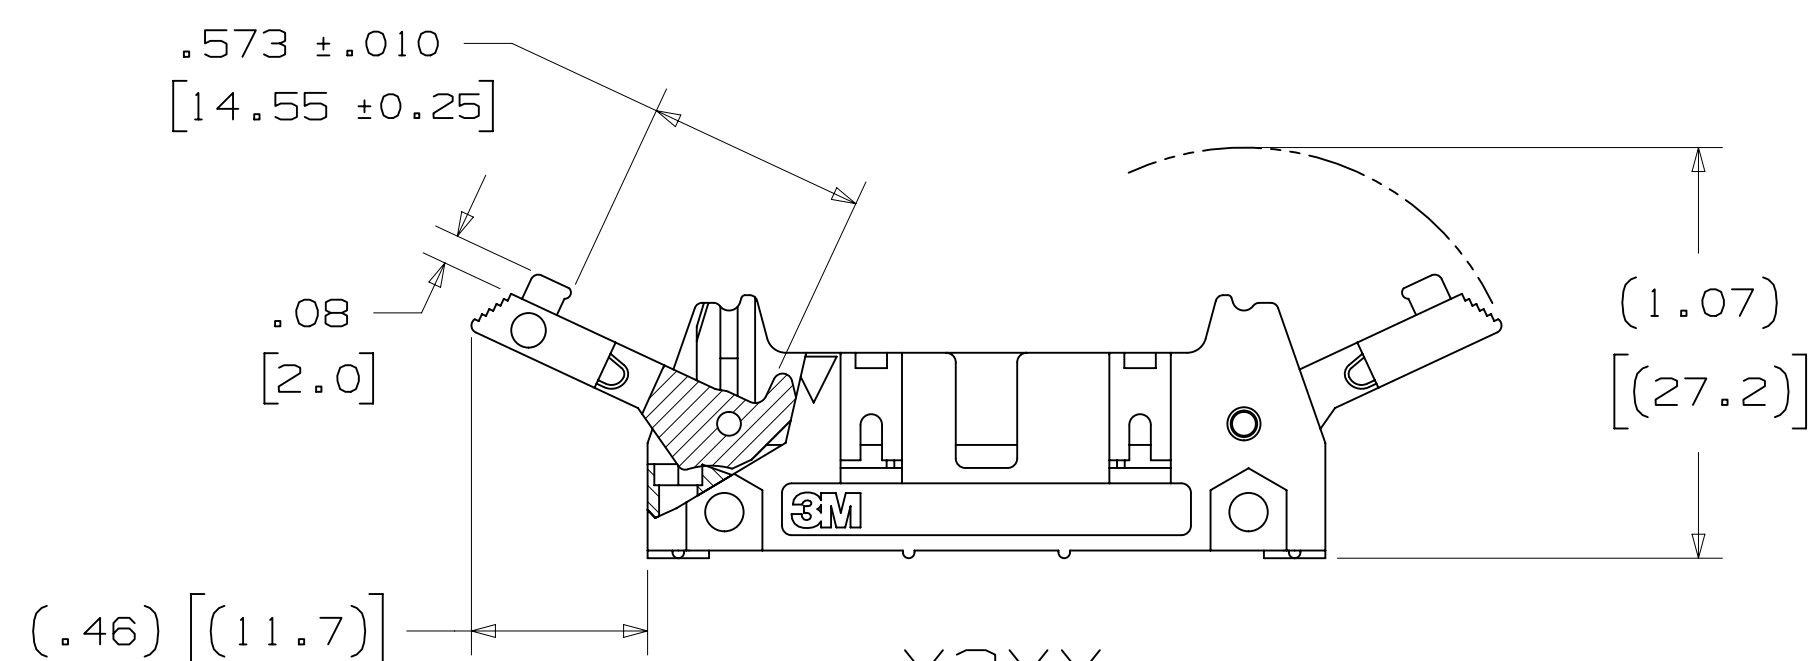

-X3XX
HEADER WITH LONG LATCH EJECTOR
FOR 3M SOCKETS WITH STRAIN RELIEF

X3XXX-XXXXXX

3M PART NUMBER:
(SEE TABLE 1)

- PLATING:

RB = 30μ" [0.76μm] GOLD AND 200μ" [5.08μm] MATTE TIN
(APP. E1 & C1 APPLY)

UB = 30μ" [0.76μm] GOLD AND 200μ" [5.08μm]
TIN LEAD (APP. E3 & C2 APPLY)

```

-TAIL:
O2 = FOR .062 [1.57] THICK BOARD
O3 = FOR .094 TO .125 [2.39 TO 3.18] THICK BOARD
K2 = KINKED FOR .062 [1.57] THICK BOARD

```

- LATCH/EJECTOR SYSTEM:
0 = NO LATCH/EJECTOR INSTALLED
2 = SHORT ROLL PIN LATCH/EJECTORS
3 = LONG ROLL PIN LATCH/EJECTORS

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

- * MILITARY (WITH 3M'S N3518 POLARIZING KEY) AND CENTERBUMP POLARIZATION.
- * OPTIONAL EJECTOR LATCHES.
- * MOUNTING HOLES FOR SECURING HEADER TO BOARD.
- * OPTIONAL POLARIZING POSTS AVAILABLE.
- * HIGH TEMPERATURE INSULATOR SUITABLE FOR "NO LEAD" SOLDERING OPERATIONS.
- * SUITABLE FOR REFLOW SOLDERING USING "PASTE IN HOLE" TECHNIQUES.
- * SOLDER TAIL OPTION.

2 PHYSICAL :

```

INSULATOR:
  MATERIAL: GLASS FILLED POLYESTER (PCT)
FLAMMABILITY: UL94V-0
  COLOR: BLACK
CONTACT:
  MATERIAL: COPPER ALLOY
  PLATING:
UNDER PLATING: 100μ" [ 2.54μm ] NICKEL-OVERALL
  WIPING AREA: 30μ" [ 0.76μm ] AVG. GOLD
  SOLDER TAILS: TIN LEAD OR MATTE TIN (SEE ORDERING INFORMATION)
  MARKINGS: 3M LOGO, PART IDENTIFICATION NUMBER AND ORIENTATION TRIANGLE

```

2 ELECTRICAL :


CURRENT RATING: 5.00A, 1 CONTACT POWERED
3.00A, 6 CONTACTS POWERED
1.75A, ALL CONTACTS POWERED
RATING CONDITIONS: EIA-364-070 METHOD 2, 30° C MAXIMUM
TEMPERATURE RISE, 20% DERATED. REFERENCE APPROPRIATE
3M PRODUCT SPECIFICATION FOR DETAILED CURRENT DERATING
CURVES.

INSULATION RESISTANCE: $>1 \times 10^9 \Omega$ AT 500 V_{DC}
WITHSTANDING VOLTAGE: 1,000V_{RMS} AT SEA LEVEL

2 ENVIRONMENTAL :

TEMPERATURE RATING: -55°C TO 105°C
PROCESS RATING: 260°C, PER J-STD-020C, SINGLE PASS
MOISTURE SENSITIVITY LEVEL: 1 (PER J-STD-020C)

DIMENSIONS: INCHES [MM]
[MM] IS REF. ONLY

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
ACCORDS				DRFT	CASTIGLIONE		DATE	MFG	DATE
				CHKD			DATE	APPRV.	DATE
								R. SCHERER	SEP 05, 2014
DIVISION		DIVISION CODE		© 3M COPYRIGHT 2015					
Interconnect Solutions		EMERSON		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.					
DO NOT SCALE DRAWING		TOLERANCES EXCEPT AS NOTED							
SCALE 2/1									
		INCHES		TITLE HEADER, 4-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA					
THIRD ANGLE PROJECTION ASME Y14.5 - 2009		.0 ± .00 ± .01 .000 ± .005 .0000 ±							
INTERPRET PER ASME Y14.5 - 2009		MILLIMETERS		CAGE NUMBER D 78-5100-0772-3					
		.0 ± .00 ± .13 .00 ±							
☒ MAX SURFACE ROUGHNESS ☐ ALL SURFACES ☒ MARKED ONLY		☒ ANGLES		SIZE DRAWING NO. D 78-5100-0772-3		REV.		S	
				MODEL		DET.		SHT 1 OF	
				3000 SERIES		SYS		YES X NO	

UL[®]
US
UL FILE NO: E68080

1. REGULATORY INFORMATION:
ROHS COMPLIANT. SEE THE
REGULATORY INFORMATION
APPENDIX (RIA) IN THE
"ROHS COMPLIANCE" SECTION
OF WWW.3MCONNECTORS.COM FOR
COMPLIANCE INFORMATION.

2 IN THE EVENT OF CONFLICT
BETWEEN THIS DATA AND THAT
CONTAINED IN THE PRODUCT
SPECIFICATION, THE PRODUCT
SPECIFICATION TAKES PRECEDENT

3 NOTCHES A & C WILL ACCOMODATE
3M POLARIZING KEY: N3518.

4 MOUNTING HARDWARE:
FROM SOLDER SIDE OF PC BOARD
USE #4-24 THREAD CUTTING SCREW
(3M PART #3341-5) WITH
Ø .116 [2.95] MOUNTING HOLE.
FOR RIGHT ANGLE VERSION ONLY:
#2-56 BOLT AND NUT (3M PART
#3341-6) WITH Ø .106 [2.69]
MOUNTING HOLE MAY BE USED.

5 THE RECOMMENDED PCB HOLE SIZE
FOR THE KINKED TAIL POSITIONS
ON THE .112 SOLDER TAIL
CONNECTOR IS $\varnothing .035 \pm .002$.
(SEE K2 VERSION).

A

3M™ FOUR-WALL HEADER, 3000 SERIES
.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE


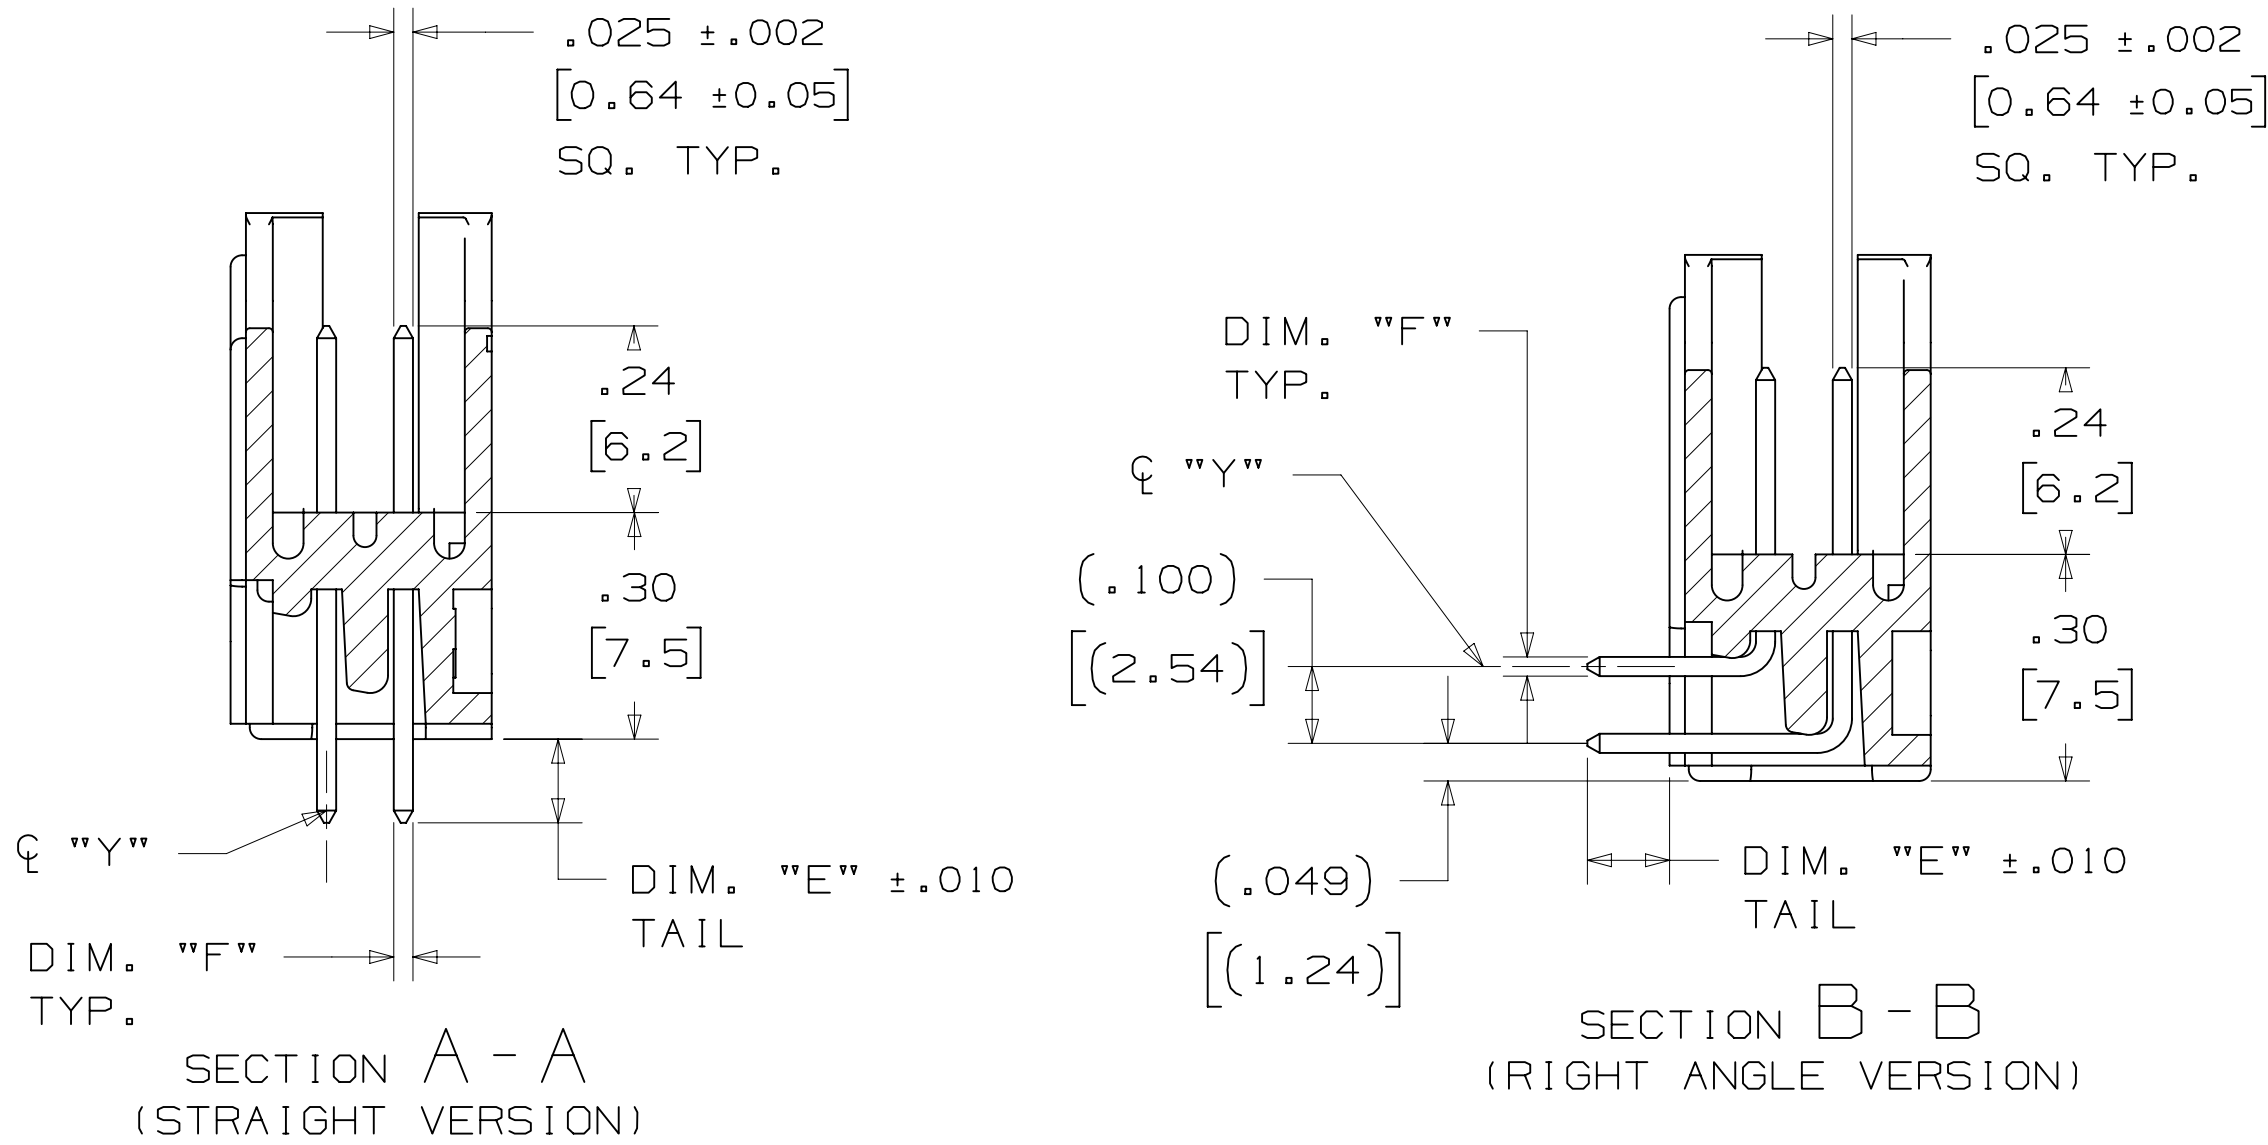


TABLE 1							
PIN QTY.	3M PART NUMBER	DIM. "A"	DIM. "B"	DIM. "C"	DIM. "D"	POLARIZING NOTCHES	PIN QTY.
06	3869	1.06 [27.0]	.905 [22.99]	.665 [16.89]	.51 [12.9]	B*	06
08	3889	1.16 [29.5]	1.005 [25.53]	.765 [19.43]	.61 [15.5]	B*	08
10	3793	1.26 [32.1]	1.105 [28.04]	.865 [21.97]	.71 [18.0]	BC	10
14	3314	1.46 [37.2]	1.305 [33.12]	1.065 [27.05]	.91 [23.1]	BC	14
16	3408	1.56 [39.7]	1.405 [35.66]	1.165 [29.59]	1.01 [25.6]	ABC	16
20	3428	1.76 [44.8]	1.604 [40.74]	1.365 [34.67]	1.21 [30.7]	ABC	20
24	3627	1.96 [49.9]	1.805 [45.82]	1.565 [39.75]	1.41 [35.8]	ABC	24
26	3429	2.06 [52.4]	1.905 [48.36]	1.665 [42.29]	1.51 [38.3]	ABC	26
30	3440	2.26 [57.5]	2.105 [53.44]	1.865 [47.37]	1.71 [43.4]	ABC	30
34	3431	2.46 [62.6]	2.305 [58.52]	2.065 [52.45]	1.91 [48.5]	ABC	34
40	3432	2.76 [70.2]	2.605 [66.14]	2.365 [60.07]	2.21 [56.1]	ABC	40
50	3433	3.26 [82.9]	3.105 [78.84]	2.865 [72.77]	2.71 [68.8]	ABC	50
60	3372	3.76 [95.6]	3.605 [91.54]	3.365 [85.47]	3.21 [81.5]	ABC	60
64	3764	3.96 [100.7]	3.805 [96.62]	3.565 [90.55]	3.41 [86.6]	ABC	64

* AVAILABLE WITHOUT CENTER NOTCH B. CONTACT 3M

TABLE 2						
3M PART NUMBER SUFFIX	CONTACT TAIL	DIM. "E"	PIN CROSS SECTION			DIM. "G"
-5XX2	.062 [1.57] THICK PC BOARD	.112 [2.84]	DIM. "F" .0245+/- .0005 [.622]	DIAGONALS .028+/- .001 [.71]	CORNER RADIUS .0075 REF. [.191]	.035+/- .003 [.89] SEE NOTE 5
-6XX2						
-5X03	.094 [2.39] TO .125 [3.18] THICK PC BOARD	.155 [3.94]	.0245+/- .0005 [.622]	.028+/- .001 [.71]	.0075 REF. [.191]	.035+/- .003 [.89]
-6X03						

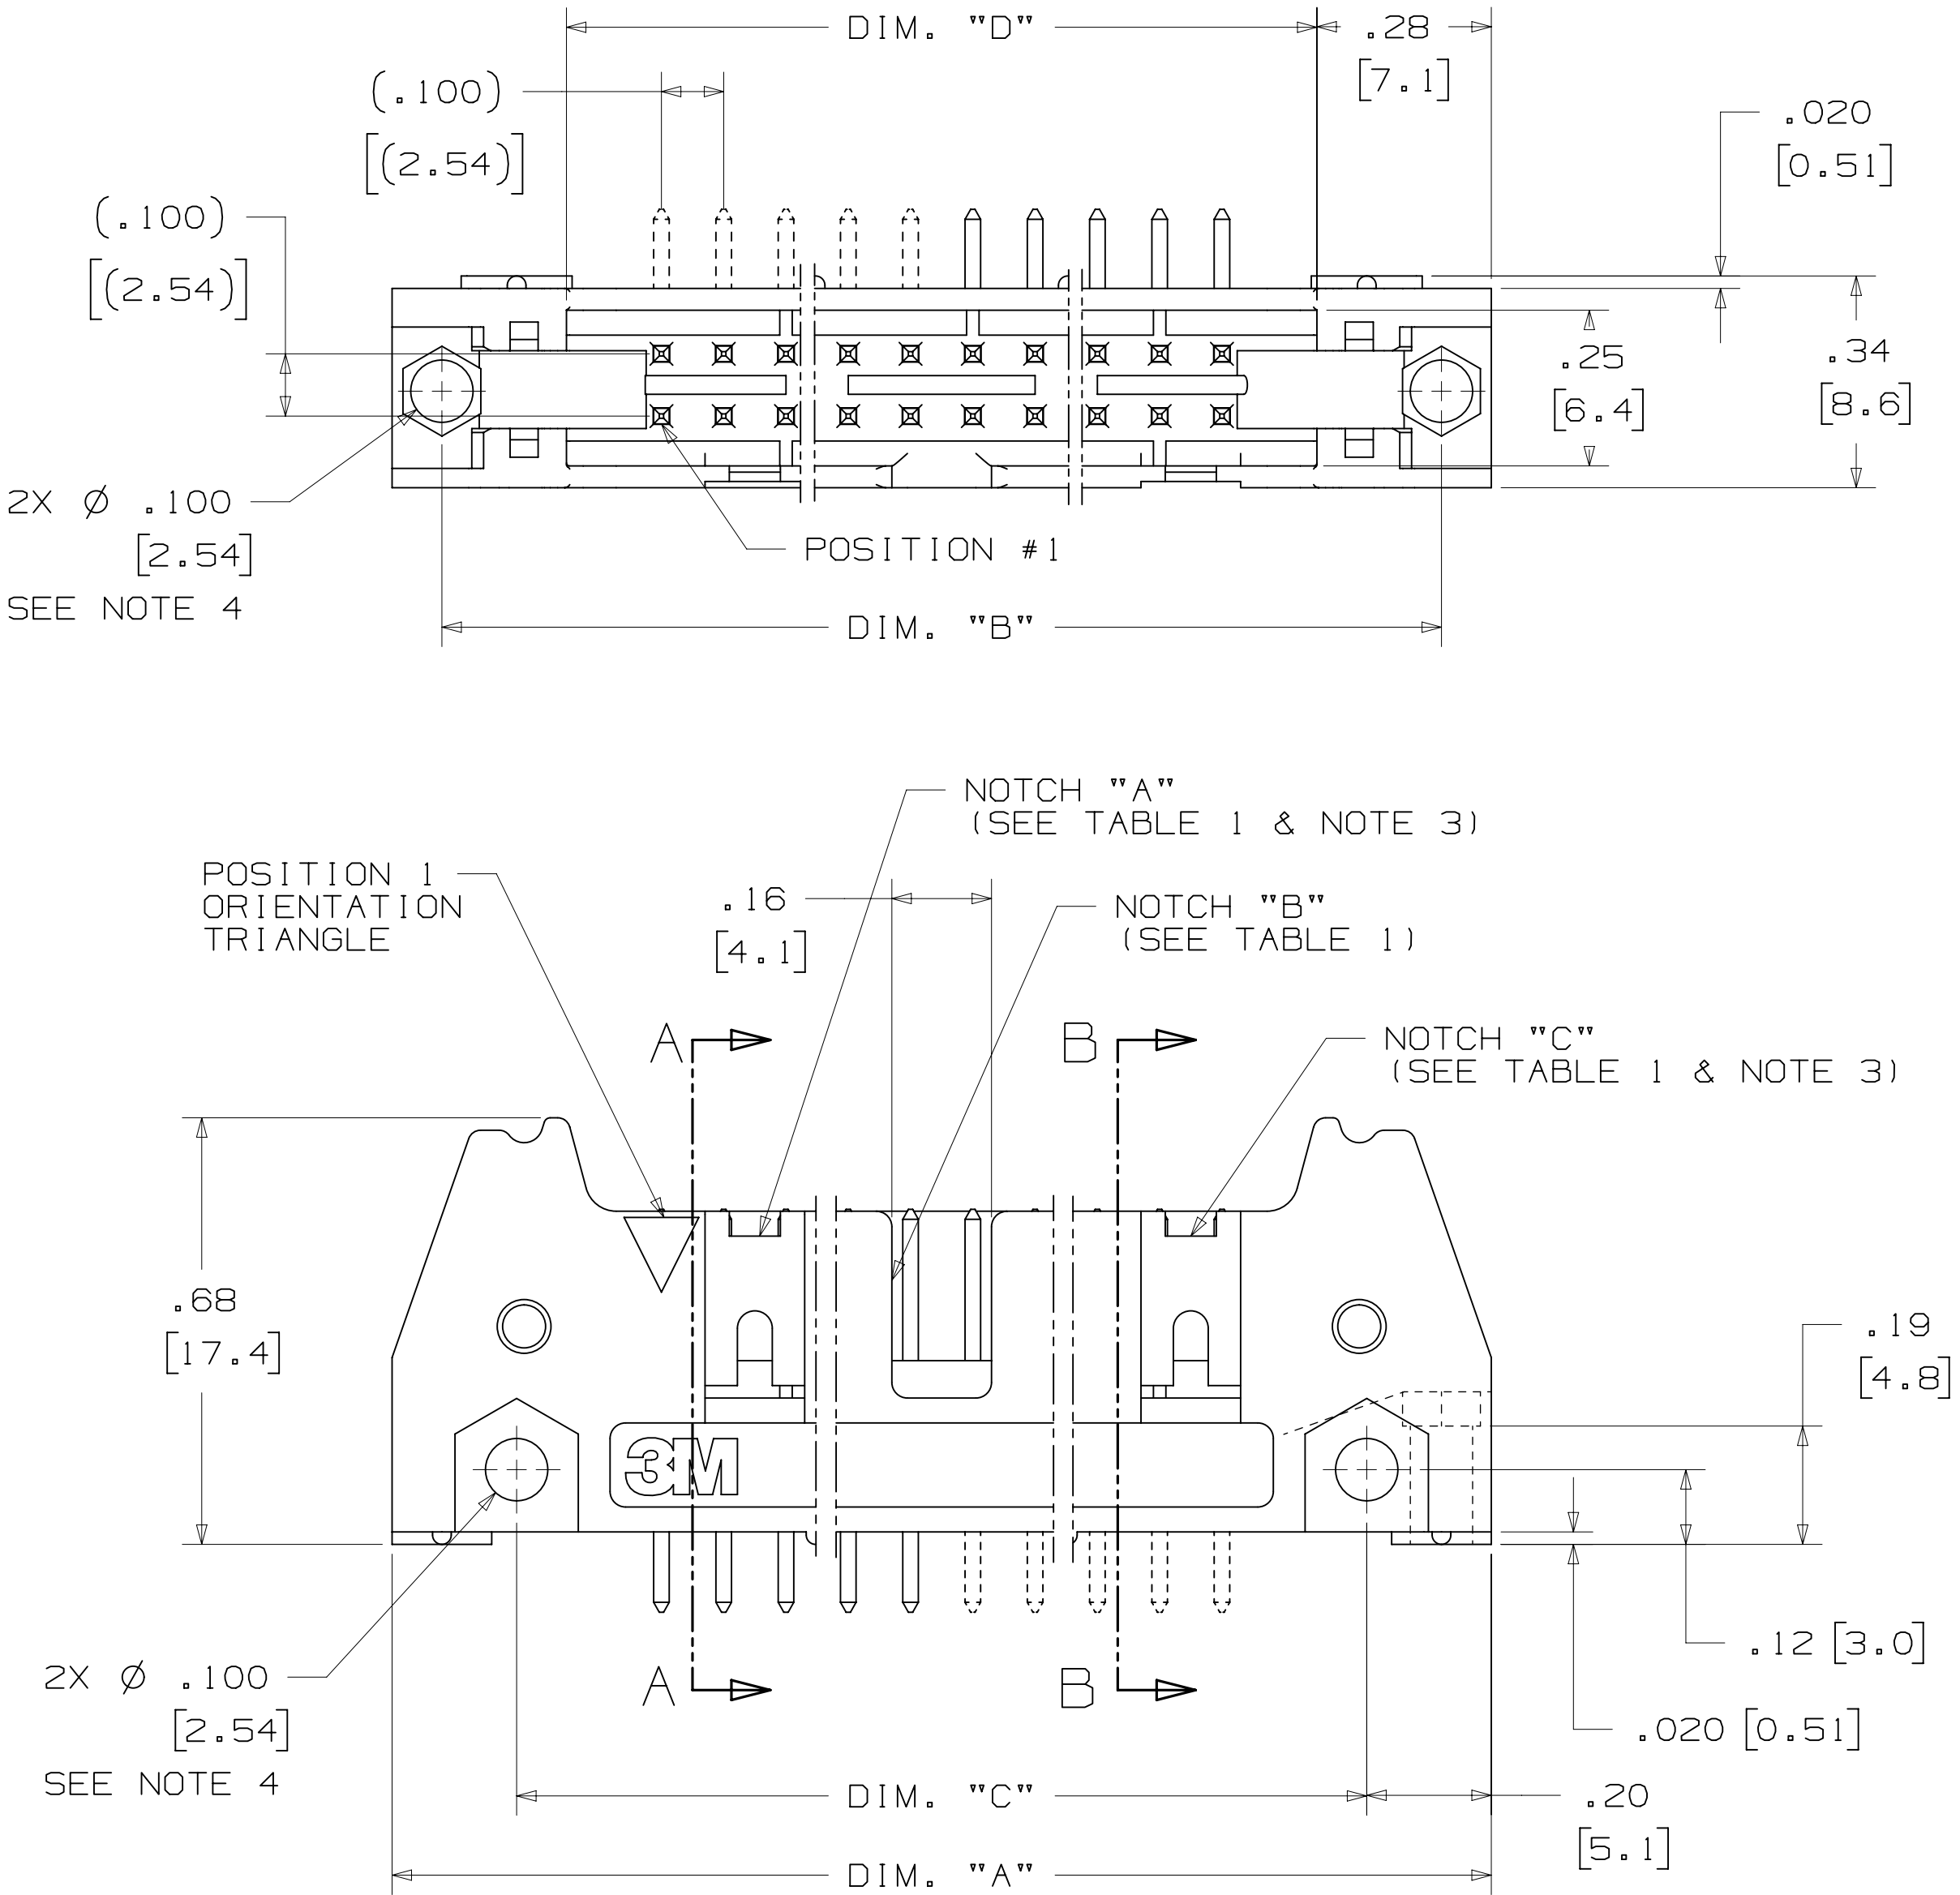


DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
3M CODES	3M CODES	ECO	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
DIVISION	DIVISION CODE	ECO	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
Interconnect Solutions	EMSD	ECO	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
DO NOT SCALE DRAWING	SCALE 4/1	ECO	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
THIRD ANGLE PROJECTION	TOLERANCES EXCEPT AS NOTED	ECO	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
INTERPRET PER ASME Y14.5 - 2009	INCHES .00 ±.01 .000 ±.005 .0000 ±	ECO	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
MAX SURFACE ROUGHNESS	MILLIMETERS 0 ±.00 ±.03 .000 ±.013 .000 ±	ECO	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
MARKED ONLY	ANGLES	ECO	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
3M		3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2015 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.		
TITLE		CAGE NUMBER		DRAWING NO.		
HEADER, 4-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA		D78-5100-0772-3		REV. S		
MODEL		3000 SERIES		DET. [] YES [] NO SHT 2 OF 4		

.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE




3M™ FOUR-WALL HEADER, 3000 SERIES
.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE


MOUNTING HARDWARE

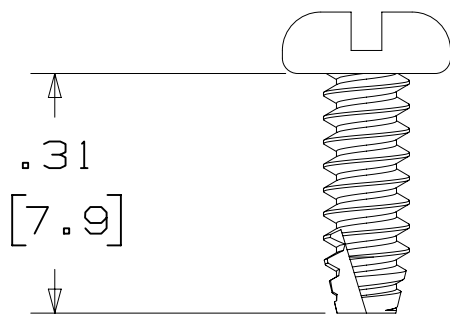


3341-5
(INSTALL FROM BOTTOM OF BOARD)
PANHEAD THREAD CUTTING SCREW:
#4-24 X 5/16"
TYPE: USA STD BT, FEDERAL BG
MATERIAL: STAINLESS STEEL

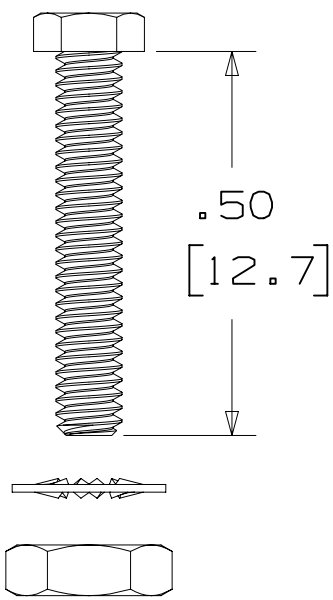


3341-6
HEX HEAD BOLT, NUT AND WASHER:
BOLT - #2-56 X 1/2"
MATERIAL: STAINLESS STEEL

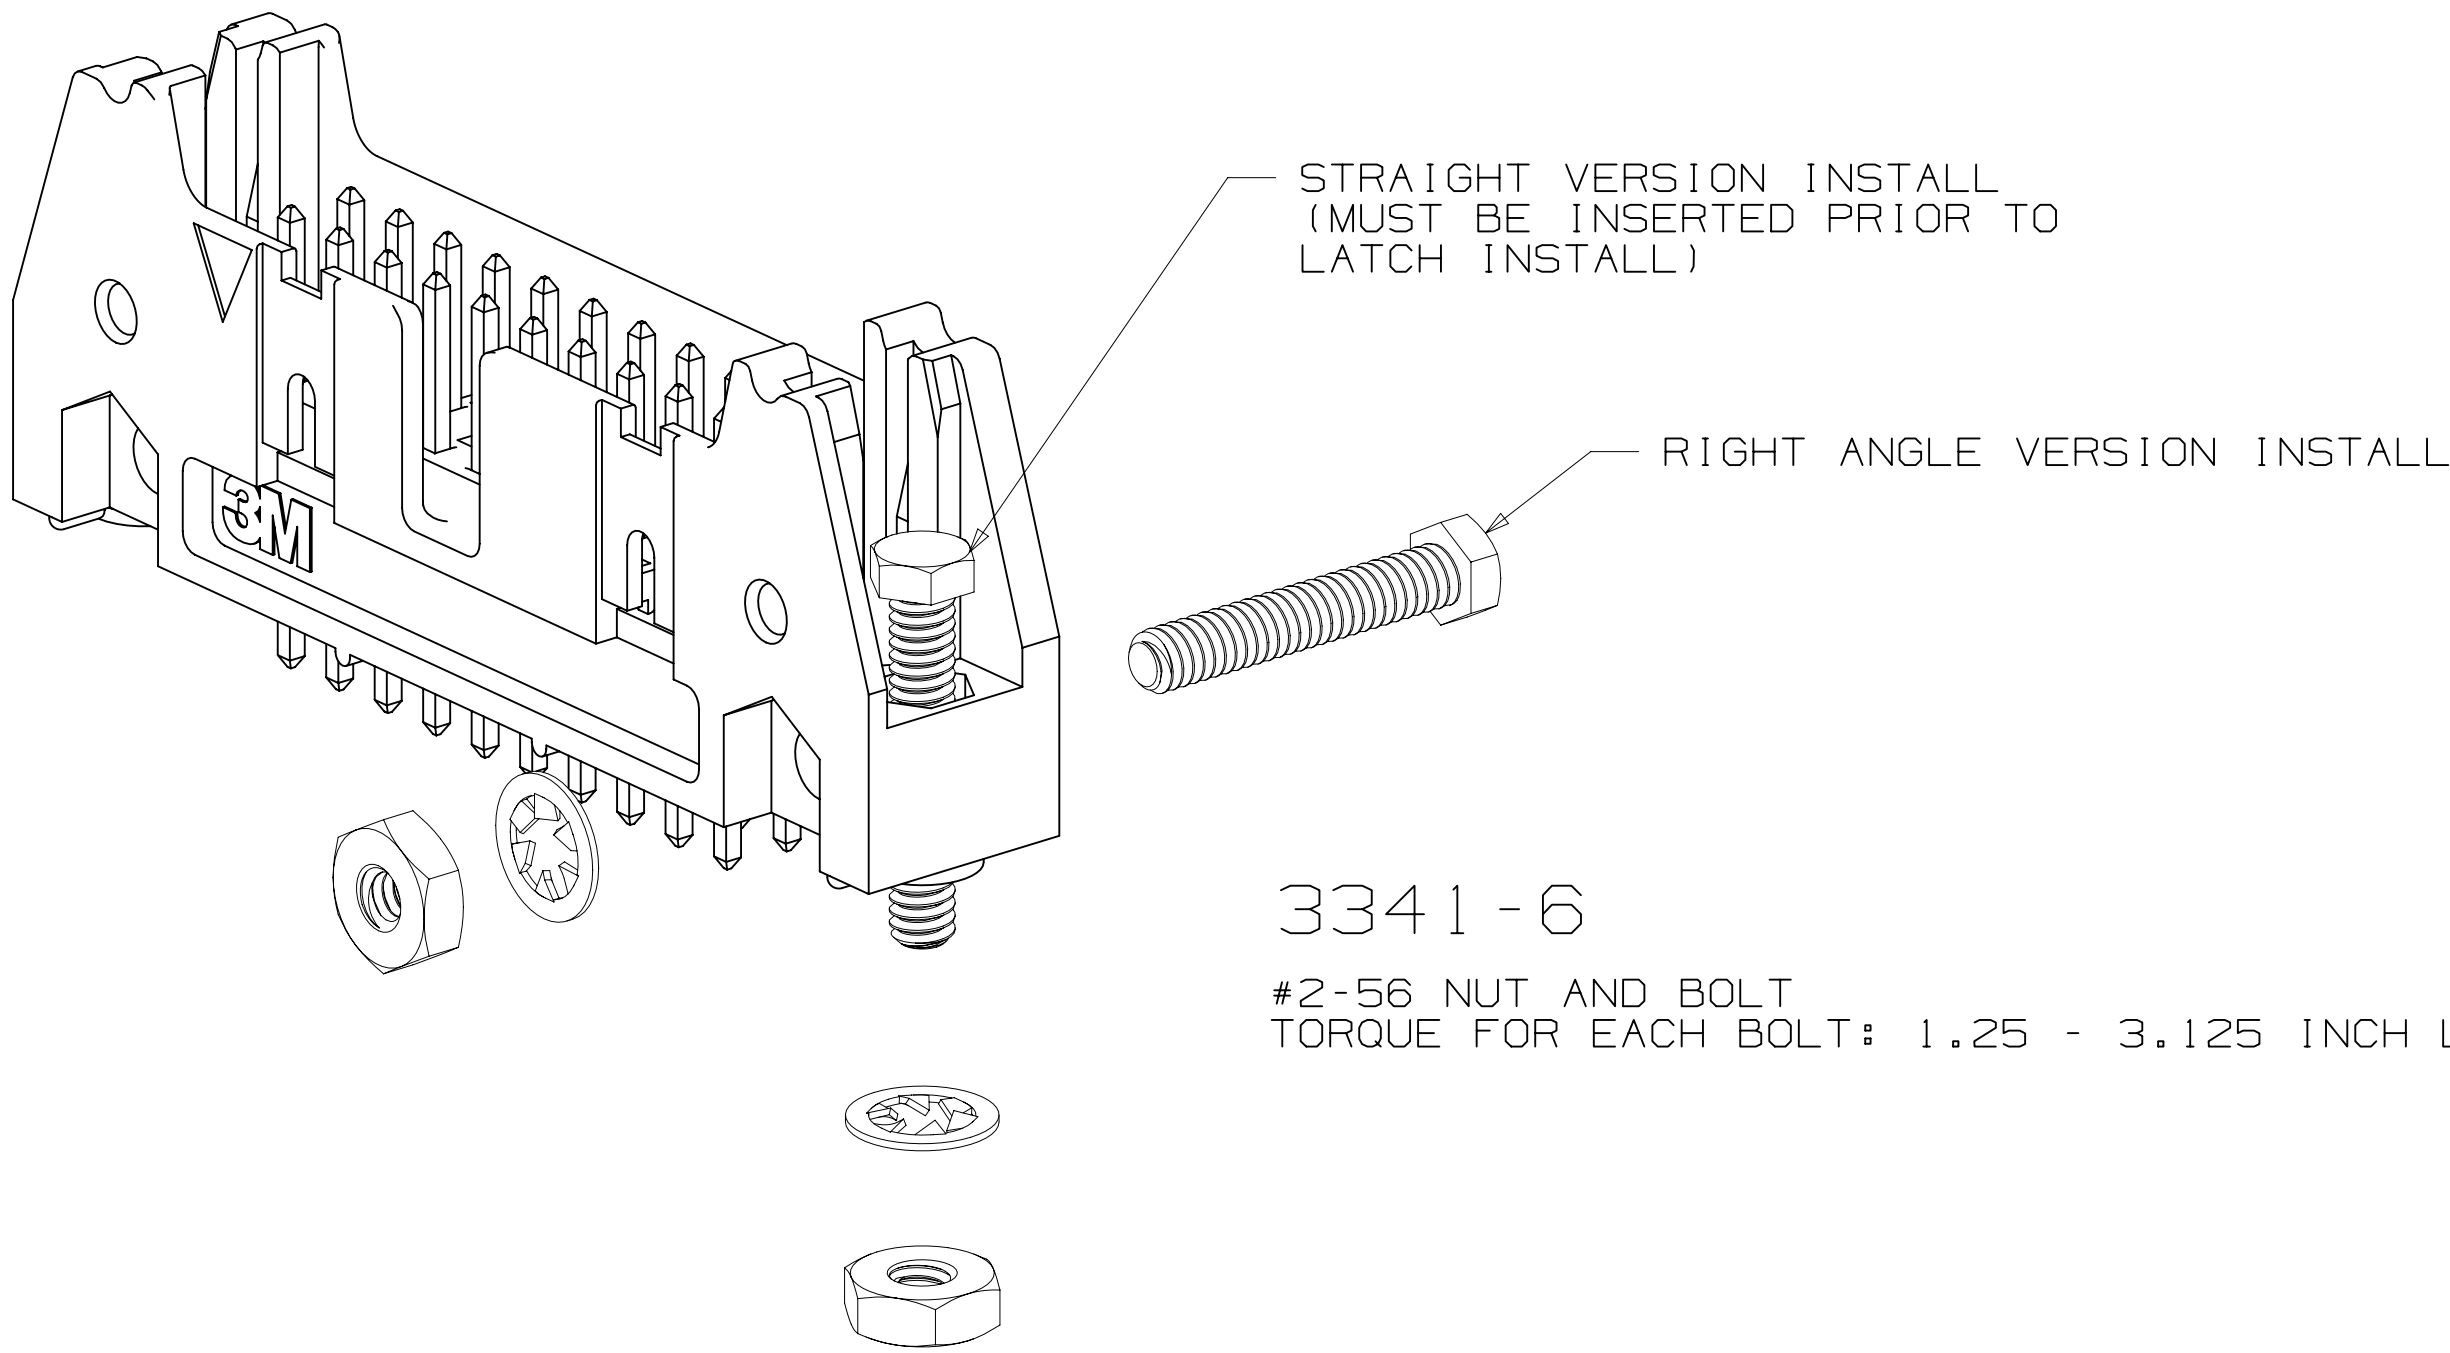

3341-6
#2-56 NUT AND BOLT
TORQUE FOR EACH BOLT: 1.25 - 3.125 INCH LBS.

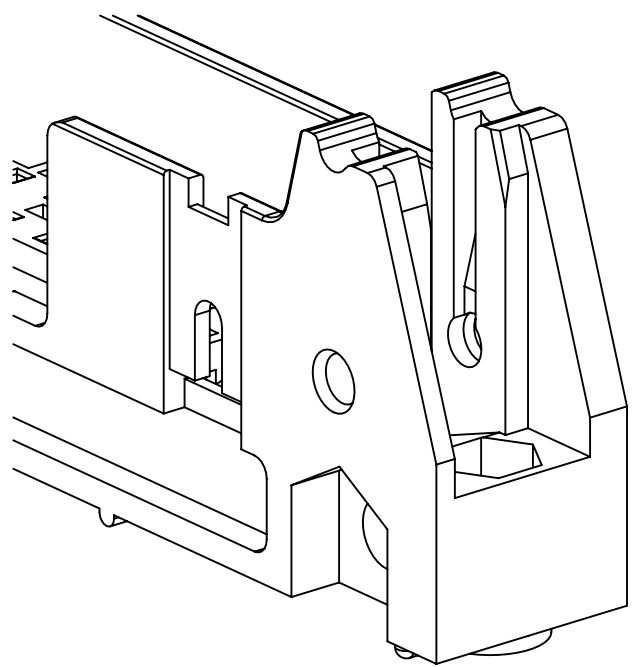

#4-24 TYPE BT SELF THREADING SCREW
WHEN USING LATCHES, MAXIMUM LENGTH
OF SCREW IS .250 INCHES PLUS
THICKNESS OF THE BOARD.
TORQUE FOR EACH SCREW IS 3-5 INCH LBS.



3341-5

S		600568		MAR 06, 2015		JNC		RS			
R		56068		JUL 25, 2014		JNC		RS			
REV		ECO		ISSUE DATE AND DESCRIPTION				DRFT		CHKD	
DRFT		CASTIGLIONE		DATE		JUL 25, 2014		MFG		DATE	
CHKD				DATE				APPR		DATE	
								R. SCHERER		SEP 05, 2014	
DIVISION		DIVISION CODE		© 3M COPYRIGHT 2015							
Interconnect Solutions		EMSD		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.							
DO NOT SCALE DRAWING		SCALE 4 1		TOLERANCES EXCEPT AS NOTED		TITLE					
				INCHES		HEADER, 4-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA					
THIRD ANGLE PROJECTION				MILLIMETERS							
INTERPRET PER ASME Y14.5 - 2009				.00		.3					
MAX SURFACE ROUGHNESS				.000		.005					
.0000				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							
.00				.0000							