
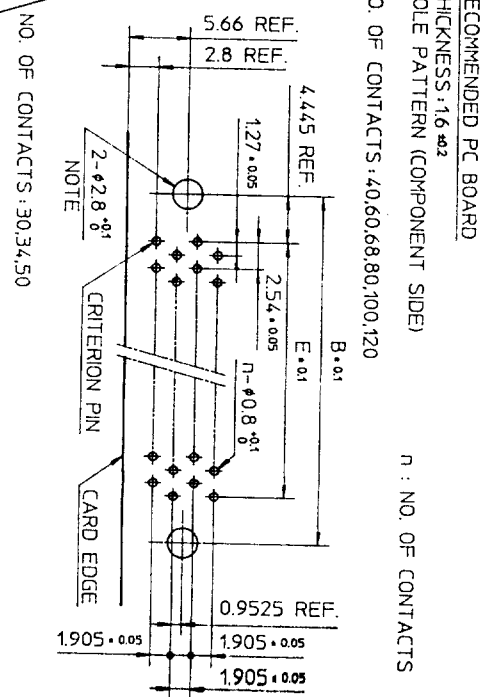

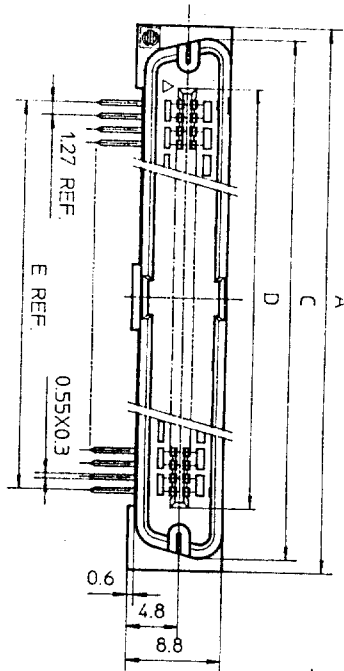


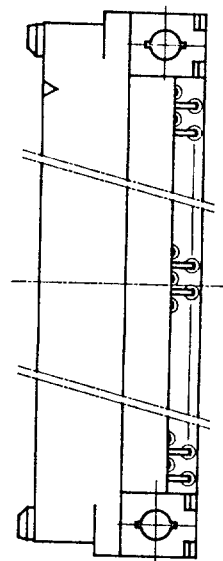



NO. OF CONTACTS: 40, 60, 68, 80, 100, 120
CRITERION PIN

NO. OF CONTACTS: 30, 34, 50

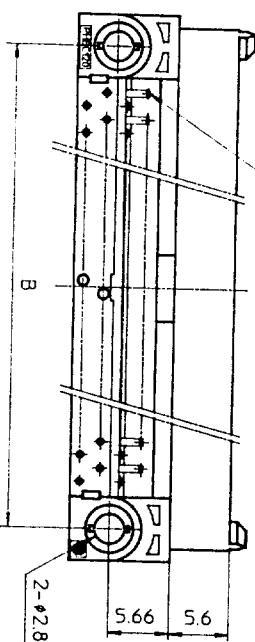

MATERIAL

BODY

LOCATOR

CONTACT

MOUNTING LATCH

SCREW NUT

NICKEL PLATED

STEEL

PHOSPHOR BRONZE

SOLDER PLATED

NYLON RESIN GLASS REINFORCED (UL94V-0)

BLACK

PBT RESIN GLASS REINFORCED (UL94V-0)

CAT. NO.	NO. OF CONTACTS (MATING SIDE)	DIMENSIONS				
		A	B	C	D	E
PHEC30P-R21	15/ROW X 2 ROWS	32.67	26.67	30.3	20.42	17.78
PHEC34P-R21	17/ROW X 2 ROWS	35.21	29.21	32.84	22.96	20.32
PHEC40P-R21	20/ROW X 2 ROWS	39.02	33.02	36.65	26.77	24.13
PHEC50P-R21	25/ROW X 2 ROWS	45.37	39.37	43	33.12	30.48
PHEC60P-R21	30/ROW X 2 ROWS	51.72	45.72	49.35	39.47	36.83
PHEC68P-R21	34/ROW X 2 ROWS	56.8	50.8	54.43	44.55	41.91
PHEC80P-R21	40/ROW X 2 ROWS	64.42	58.42	62.05	52.17	49.53
PHEC100P-R21	50/ROW X 2 ROWS	77.12	71.12	74.75	64.87	62.23
PHEC120P-R21	60/ROW X 2 ROWS	89.82	83.82	87.45	77.57	74.93

TOLERANCES
UNLESS OTHERWISE SPECIFIED: ±0.3

CONTACT PLATING TABLE
(THICKNESS: μm)

CONTACT AREA	REMAINDER
GOLD 0.25 MIN.	SOLDER
OVER NICKEL 32	OVER NICKEL





PRINTED CIRCUIT CONNECTOR

CAT. NO.	
PHEC___P-R21_	
DRAWING NO.	REV
JSC 90736	3
BURNDY JAPAN, Ltd.	

DESIGNED	
DRAWN	M. Oga
CHECKED	4.86
APPROVED	J. Ogata
DATE	Mar. 8, 1990

SCALE	
DIM. IN	mm
MATERIAL	


REV	DATE	DESCRIPTION	CHKD
1	92-8-14	30,34,50,68 POSITIONS ADDED. LOCATOR MATERIAL ADDED.	
2	90-6-7	EC 7866	
3	90-4-20	EC 7837	

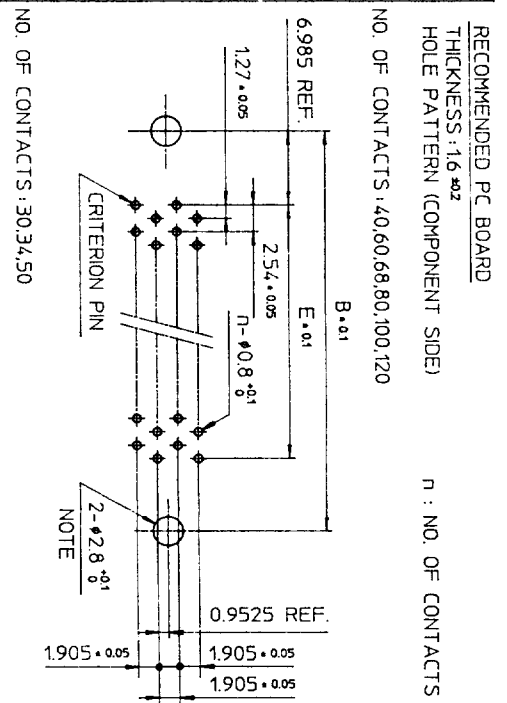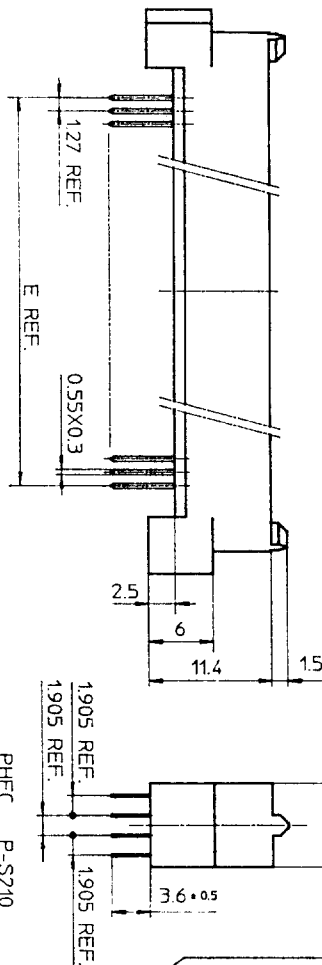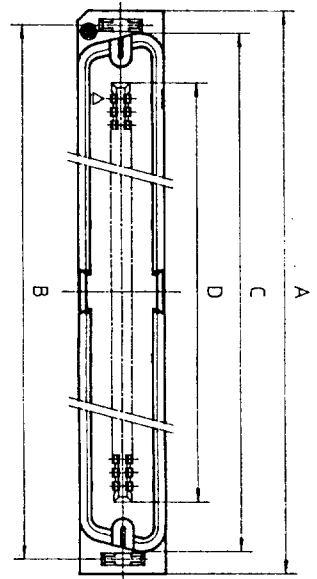


NOTE
THROUGH-HOLES FOR MOUNTING LATCHES ALSO SHOULD BE PLATED.

TOLERANCES
UNLESS OTHERWISE SPECIFIED: ±0.3

NO. OF CONTACTS: 40,60,68,80,100,120
CRITERION PIN



NO. OF CONTACTS: 30,34,50



MATERIAL

INSULATOR: NYLON RESIN GLASS REINFORCED (UL94V-0)

COLOR: BLACK

CONTACT: COPPER ALLOY

MOUNTING LATCH: PHOSPHOR BRONZE

SOLDER PLATED

CONTACT PLATING TABLE

[THICKNESS: μm]

CONTACT AREA	REMAINDER
GOLD 0.25 MIN	SOLDER
OVER NICKEL 3Z	OVER NICKEL

PRINTED CIRCUIT CONNECTOR

CAT. NO.

PHEC_P-S21

DRAWING NO.

JSC 90735

BURNDY
JAPAN, Ltd.

DESIGNED

DRAWN

CHECKED

APPROVED

DATE

M. Oba

4.8/1

J. Toyoshima

Mar. 8, 1990

SCALE

DIM IN

MATERIAL

REFERENCE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV

DATE

DESCRIPTION

CKD

REV


DATE

DESCRIPTION



CKD

REV

DATE

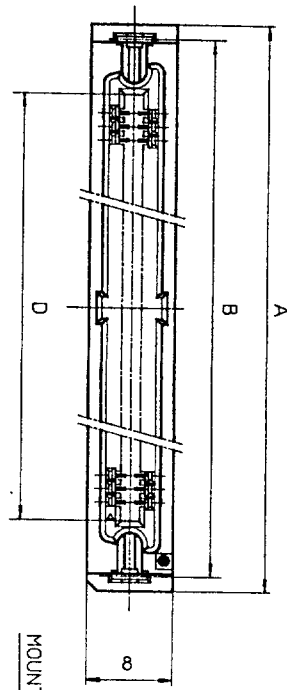


PHEC...R-S211

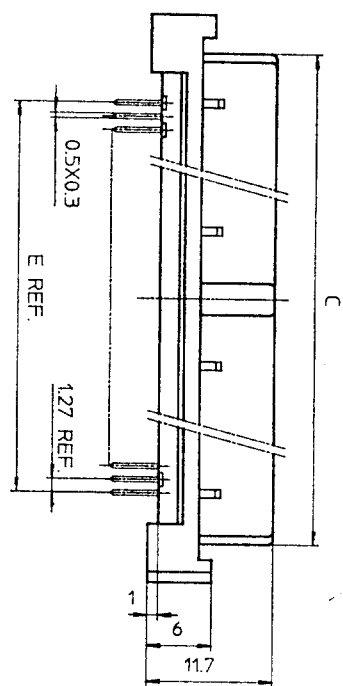


PHEC...R-S210

RECOMMENDED PC BOARD
THICKNESS: 1.6 ± 0.2
HOLE PATTERN (COMPONENT SIDE)
NO. OF CONTACTS: 40, 60, 80, 100, 120
N: NO. OF CONTACTS

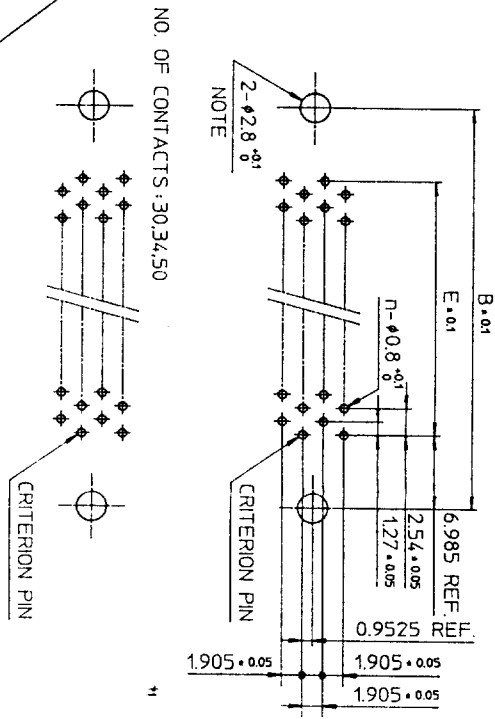

NOTE
THROUGH-HOLES FOR MOUNTING LATCHES ALSO SHOULD BE PLATED.

TOLERANCES
UNLESS OTHERWISE SPECIFIED: ±0.3

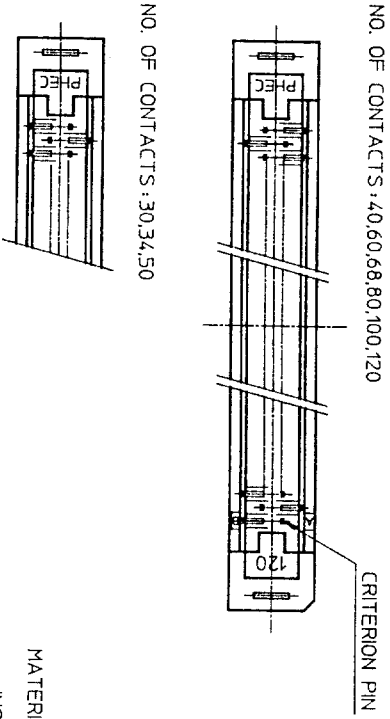

NO. OF CONTACTS: 40, 60, 80, 100, 120

NO. OF CONTACTS: 30, 34, 50

MATERIAL

INSULATOR: PBT RESIN GLASS REINFORCED (UL94V-0)
COLOR: BLACK

CONTACT: PHOSPHOR BRONZE
MOUNTING LATCH: PHOSPHOR BRONZE
SOLDER PLATED

CAT. NO.	NO. OF CONTACTS (MATING SIDE)	DIMENSIONS				
		A	B	C	D	E
PHEC30R-S21	15/ROW X 2 ROWS	34.55	31.75	27.26	21.26	17.78
PHEC34R-S21	17/ROW X 2 ROWS	37.09	34.29	29.8	23.8	20.32
PHEC40R-S21	20/ROW X 2 ROWS	40.9	38.1	33.61	27.61	24.13
PHEC50R-S21	25/ROW X 2 ROWS	47.25	44.45	39.96	33.96	30.48
PHEC60R-S21	30/ROW X 2 ROWS	53.6	50.8	46.31	40.31	36.83
PHEC68R-S21	34/ROW X 2 ROWS	58.68	55.88	51.39	45.39	41.91
PHEC80R-S21	40/ROW X 2 ROWS	66.3	63.5	59.01	53.01	49.53
PHEC100R-S21	50/ROW X 2 ROWS	79.0	76.2	71.71	65.71	62.23
PHEC120R-S21	60/ROW X 2 ROWS	91.7	88.9	84.41	78.41	74.93

CONTACT PLATING TABLE

(THICKNESS: μm)

CONTACT AREA	REMAINDER
GOLD 0.25 MIN. OVER NICKEL 3.2	SOLDER OVER NICKEL




PRINTED CIRCUIT CONNECTOR

CAT. NO. PHEC...R-S211
DRAWING NO. JSC 90737
REV 4
BURNDDY JAPAN Ltd.


DESIGNED
DRAWN M. Oba
CHECKED H. Eki
APPROVED T. Koyama
DATE Mar. 8, 1990

SCALE
DIM. IN mm
MATERIAL


REV	DATE	DESCRIPTION	CKD
93	1-29	WRONG CONTACT DIM. CORRECTED.	
92	3-8-11	30,34,50,68 POSITIONS ADDED No 5.9	
90	5-30	EC 7866 No JK	
90	4-20	EC 7837 No JK	
REV	DATE	DESCRIPTION	CKD
REFERENCE			

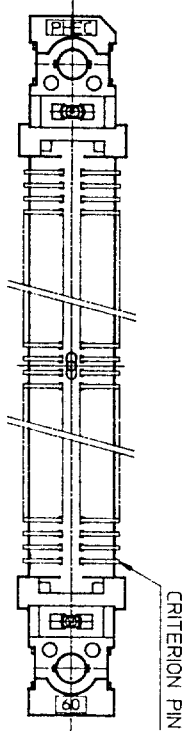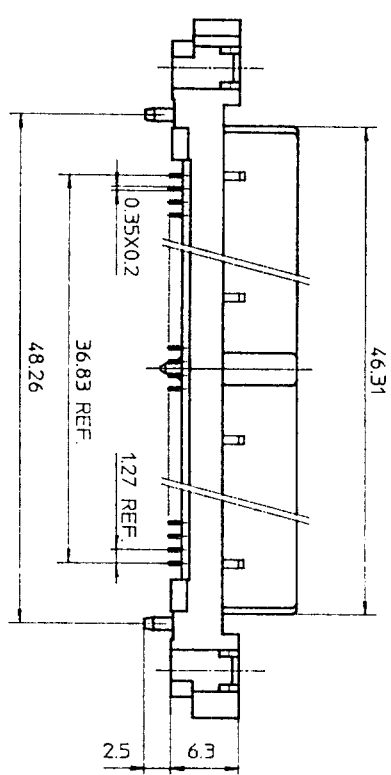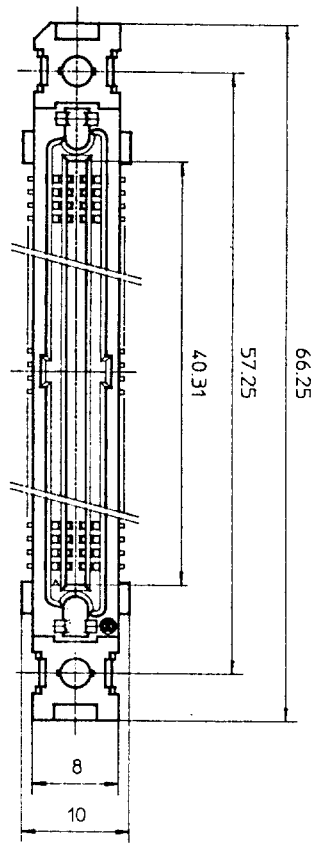


RECOMMENDED P.C. BOARD
THICKNESS : 1.6 ±0.2
HOLE PATTERN (COMPONENT SIDE)

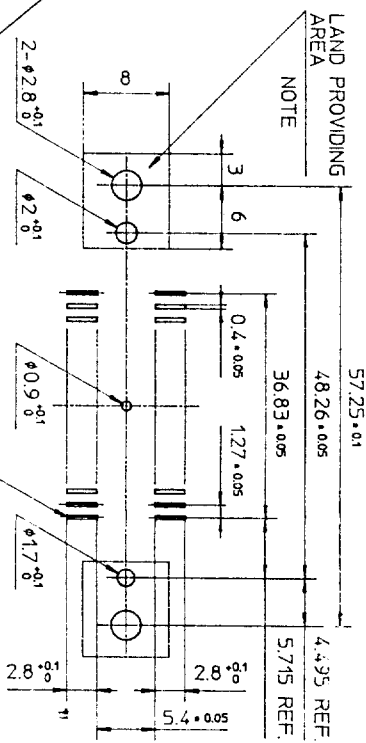

NOTE
PROVIDE LAND SO THAT FLANGE PORTION OF THE CONNECTOR
CAN BE PUT.



TOLERANCES
UNLESS OTHERWISE SPECIFIED : ±0.3



PHEC60RT-S212

MATERIAL

INSULATOR : PPS RESIN GLASS REINFORCED (UL94V-0)
COLOR : BLACK

CONTACT : PHOSPHOR BRONZE

SCREW NUT : STAINLESS

NO. OF CONTACTS : 30/ROW X 2 ROWS (MATING SIDE)

CONTACT PLATING TABLE

CONTACT AREA		REMAINDER	
GOLD 0.25 MIN.		SOLDER	
OVER NICKEL 32		OVER NICKEL	






PRINTED CIRCUIT CONNECTOR
SURFACE MOUNT TYPE

REV	DATE	DESCRIPTION	CHKD.
4	'92 8-14	WRONG CONTACT DIM. CORRECTED	
3	'92 1-8	100 POSITIONS OF DELETED.	
2	'90 6-8	DIM. CHANGED.	
1	'90 4-20	EC7866	
		VARIATION ADDED.	

SCALE
DIM. IN
MATERIAL

DESIGNED
DRAWN
CHECKED
APPROVED
DATE


CAT. NO.
PHEC60RT-S21_
DRAWING NO.
JSC 90739
REV
4
BURNDY
JAPAN, Ltd.

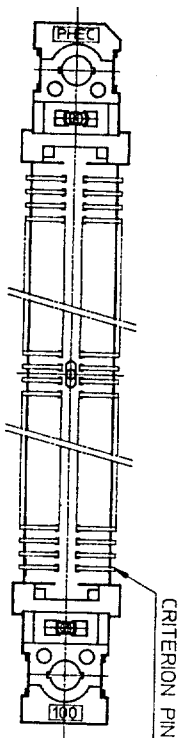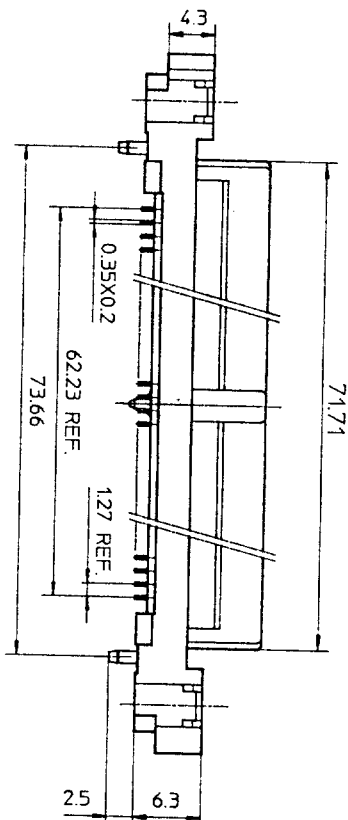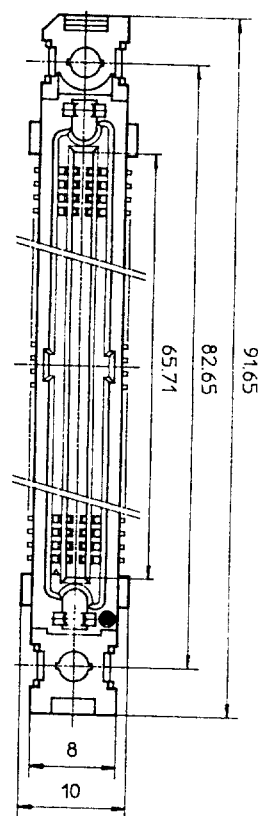

PHEC100RT-S212

PHEC100RT-S210

NOTE
PROVIDE LAND SO THAT FLANGE PORTION OF THE CONNECTOR
CAN BE PUT.

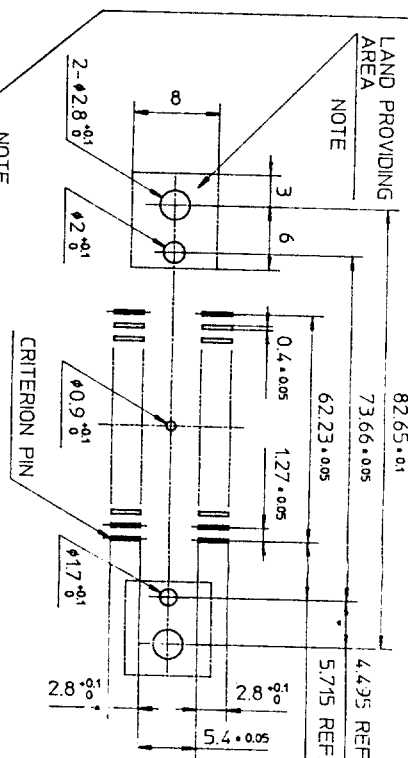

RECOMMENDED PC BOARD
THICKNESS: 1.6 ±0.2
HOLE PATTERN (COMPONENT SIDE)

TOLERANCES
UNLESS OTHERWISE SPECIFIED: ±0.3

MATERIAL

INSULATOR : PPS RESIN GLASS REINFORCED (UL94V-0)
COLOR : BLACK

CONTACT : PHOSPHOR BRONZE

SCREW NUT : STAINLESS

NO. OF CONTACTS : 50/ROW X 2 ROWS (MATING SIDE)

CONTACT PLATING TABLE

[THICKNESS : μm]

CONTACT AREA	REMAINDER
GOLD 0.25 MIN. OVER NICKEL 3Z OVER NICKEL	SOLDER

PRINTED CIRCUIT CONNECTOR
SURFACE MOUNT TYPE

CAT. NO.	PHEC100RT-S21
DRAWING NO.	JSC 91839
REV	0

BURNDY
JAPAN, Ltd.

DESIGNED

DRAWN

CHECKED

APPROVED

DATE Aug. 11, 1992

SCALE

DIM. IN

MATERIAL

REV	DATE	DESCRIPTION	CHKD.
-----	------	-------------	-------

REFERENCE

DRAWING NO.
JSC 90752

MATERIAL
INSULATOR : PBT RESIN GLASS REINFORCED (UL94V-0)
COLOR : BLACK
CONTACT : PHOSPHOR BRONZE
MOUNTING LATCH : PHOSPHOR BRONZE
SOLDER PLATED

CONTACT PLATING TABLE
[THICKNESS, μ m]



CONTACT AREA	REMAINDER
GOLD 0.25 MIN OVER NICKEL 3.2	SOLDER OVER NICKEL

REV	DATE	DESCRIPTION	CHKD.
5	'93 6-22	100 POSITIONS ADDED.	M.O.
4	'93 2-1	WRONG CONTACT DIM. CORRECTED.	M.O.
3	'92 8-11	100,120 POSITIONS DELETED. 30,34,50,68 POSITIONS ADDED.	M.O.
2	'90 5-30	DIM. CHANGED (36.61 $\rightarrow$ 33.61)	M.O.
1	'90 5-14	EC 7866	HE

REFERENCE

CAT. NO.	NO. OF CONTACTS (MATING SIDE)	DIMENSIONS				
		A	B	C	D	E
PHEC30R-S21-H	15/ROW X 2 ROWS	34.55	31.75	27.26	21.26	17.78
PHEC34R-S21-H	17/ROW X 2 ROWS	37.09	34.29	29.8	23.8	20.32
PHEC40R-S21-H	20/ROW X 2 ROWS	40.9	38.1	33.61	27.61	24.13
PHEC50R-S21-H	25/ROW X 2 ROWS	47.25	44.45	39.96	33.96	30.48
PHEC60R-S21-H	30/ROW X 2 ROWS	53.6	50.8	46.31	40.31	36.83
PHEC68R-S21-H	34/ROW X 2 ROWS	58.68	55.88	51.39	45.39	41.91
PHEC80R-S21-H	40/ROW X 2 ROWS	66.3	63.5	59.01	53.01	49.53
PHEC100R-S21-H	50/ROW X 2 ROWS	79.0	76.2	71.71	65.71	62.23

TOLERANCES
UNLESS OTHERWISE SPECIFIED: ± 0.3

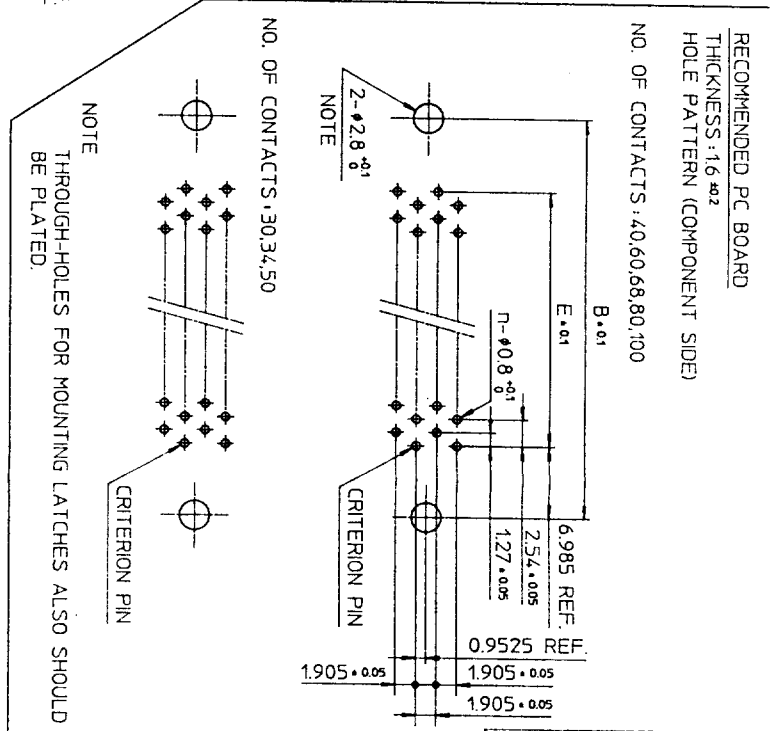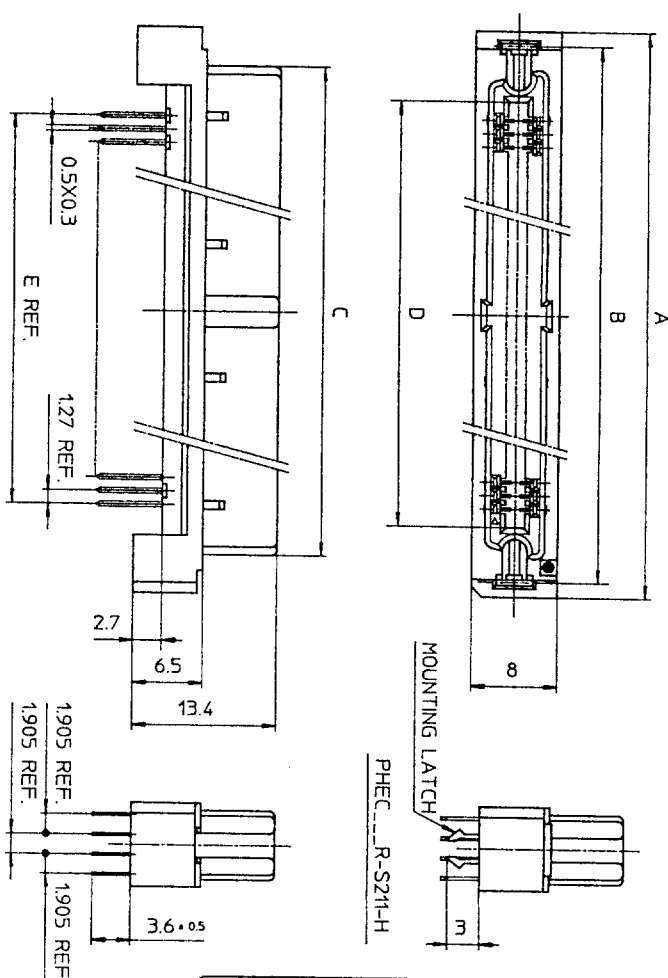

NOTE
THROUGH-HOLES FOR MOUNTING LATCHES ALSO SHOULD
BE PLATED.

SCALE	DESIGNED	DRAWN	CHECKED	APPROVED	DATE
DIM. IN mm		M. Oga			Mar. 24, 1990
MATERIAL					

PRINTED CIRCUIT CONNECTOR
HIGH STAND OFF TYPE




CAT. NO.
PHEC_R-S21-H

DRAWING NO. JSC 90752 REV 5


BURNDY
JAPAN, Ltd.

RECOMMENDED PC BOARD
THICKNESS: 1.6 ±0.2
HOLE PATTERN (COMPONENT SIDE)


NO. OF CONTACTS: 40,60,68

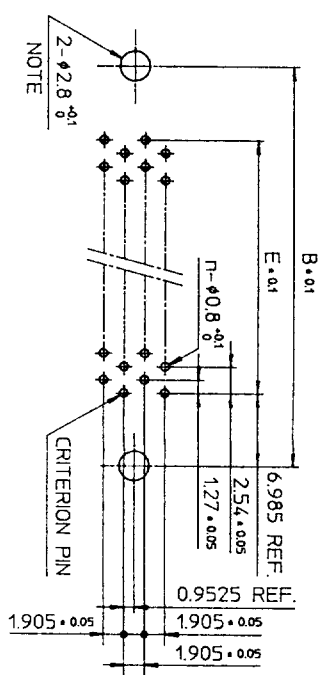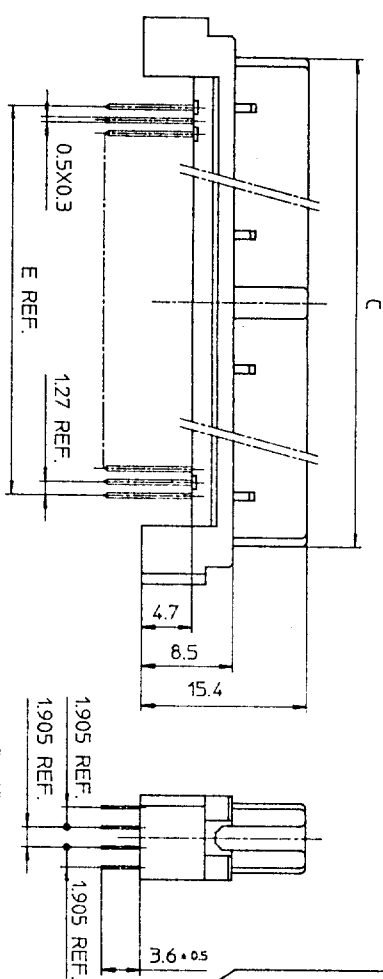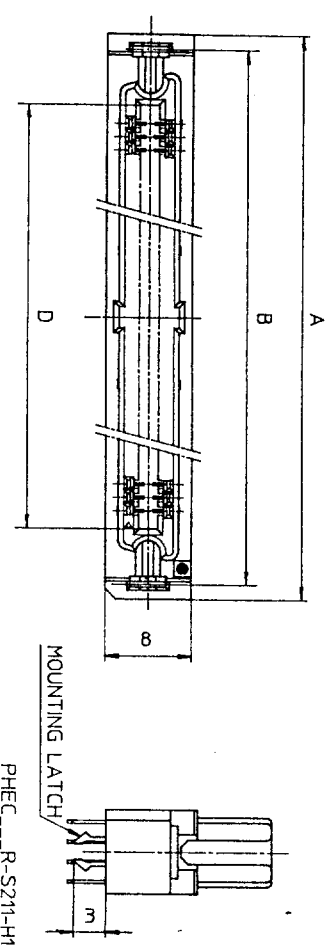


NO. OF CONTACTS: 30,34,50

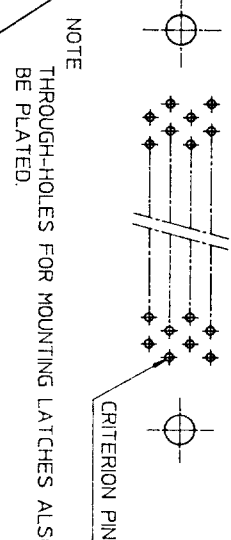

NO. OF CONTACTS: 40,60,68

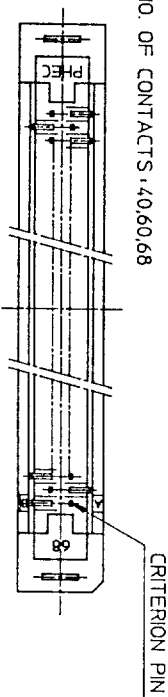

NO. OF CONTACTS: 30,34,50



CAT. NO.	NO. OF CONTACTS (MATING SIDE)	DIMENSIONS				
		A	B	C	D	E
PHEC30R-S21-H1	15/ROW X 2 ROWS	34.55	31.75	27.26	21.26	17.78
PHEC34R-S21-H1	17/ROW X 2 ROWS	37.09	34.29	29.8	23.8	20.32
PHEC40R-S21-H1	20/ROW X 2 ROWS	40.9	38.1	33.61	27.61	24.13
PHEC50R-S21-H1	25/ROW X 2 ROWS	47.25	44.45	39.96	33.96	30.48
PHEC60R-S21-H1	30/ROW X 2 ROWS	53.6	50.8	46.31	40.31	36.83
PHEC68R-S21-H1	34/ROW X 2 ROWS	58.68	55.88	51.39	45.39	41.91

TOLERANCES
UNLESS OTHERWISE SPECIFIED: ±0.3

MATERIAL

INSULATOR: PBT RESIN GLASS REINFORCED (UL94V-0)

COLOR: BLACK

CONTACT: PHOSPHOR BRONZE

MOUNTING LATCH: PHOSPHOR BRONZE

SOLDER PLATED

CONTACT PLATING TABLE

[THICKNESS: μm]

CONTACT AREA	REMAINDER
GOLD 0.25 MIN. OVER NICKEL 3.2	SOLDER OVER NICKEL

PRINTED CIRCUIT CONNECTOR
HIGH STAND OFF TYPE
CAT. NO.

PHEC_R-S21-H1

DRAWING NO. REV

JSC 91840 1

BURNDY
JAPAN, Ltd.

DESIGNED
DRAWN *M. Oba*
CHECKED A.matsuo
APPROVED *S. Ito*
DATE Aug. 17, 1992

SCALE
DIM IN mm
MATERIAL


1 93
2-1 WRONG CONTACT DIM. CORRECTED.

REV DATE DESCRIPTION CKD


REFERENCE

DRAWING NO. JSC 91840

SCREW NUT



PHEC...R-R212




PHEC...R-R211

RECOMMENDED PC BOARD


THICKNESS: 1.6 ±0.2
HOLE PATTERN (COMPONENT SIDE)

NO. OF CONTACTS: 40,60,68,80,100,120

n : NO. OF CONTACTS

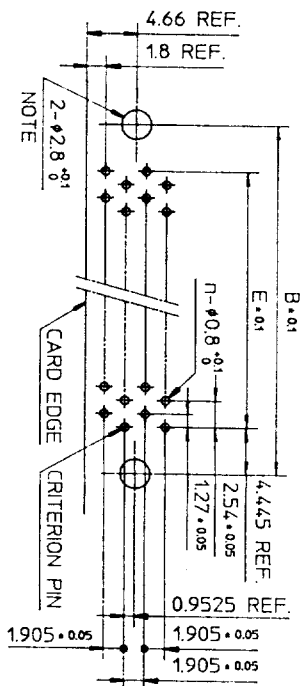

NO. OF CONTACTS: 30,34,50

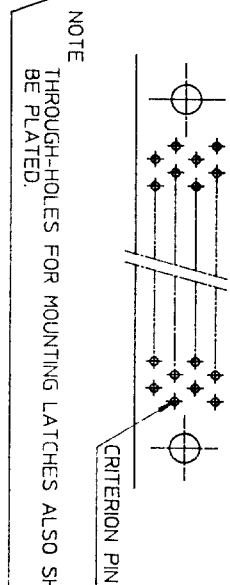


NOTE
THROUGH-HOLES FOR MOUNTING LATCHES ALSO SHOULD BE PLATED.


TOLERANCES

UNLESS OTHERWISE SPECIFIED, ±0.3

NO. OF CONTACTS: 40,60,68,80,100,120

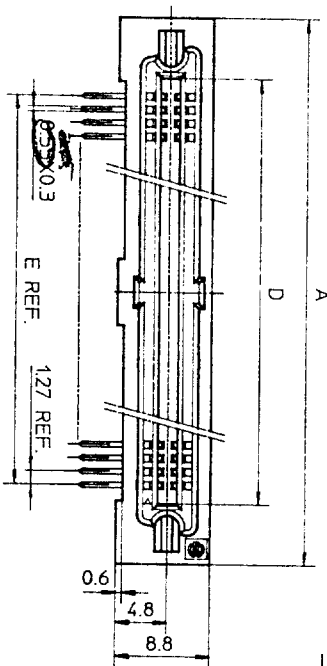

CRITERION PIN

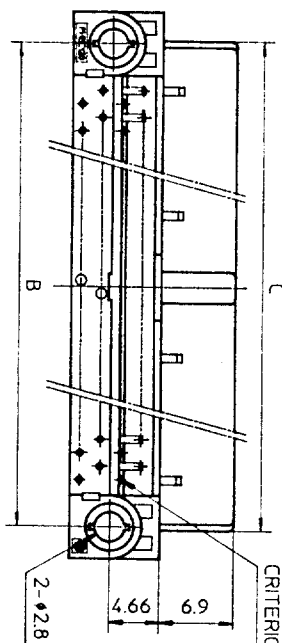

NO. OF CONTACTS: 30,34,50

MATERIAL

BODY: PBT RESIN GLASS REINFORCED (UL94V-0)
LOCATOR COLOR: BLACK

CONTACT: PHOSPHOR BRONZE

MOUNTING LATCH: PHOSPHOR BRONZE
SOLDER PLATED

SCREW NUT: STEEL
NICKEL PLATED

CAT. NO.	NO. OF CONTACTS (MATING SIDE)	DIMENSIONS				
		A	B	C	D	E
PHEC30R-R21	15/ROW X 2 ROWS	32.67	26.67	27.26	21.26	17.78
PHEC34R-R21	17/ROW X 2 ROWS	35.21	29.21	29.8	23.8	20.32
PHEC40R-R21	20/ROW X 2 ROWS	39.02	33.02	33.61	27.61	24.13
PHEC50R-R21	25/ROW X 2 ROWS	45.37	39.37	39.96	33.96	30.48
PHEC60R-R21	30/ROW X 2 ROWS	51.72	45.72	46.31	40.31	36.83
PHEC68R-R21	34/ROW X 2 ROWS	56.8	50.8	51.39	45.39	41.91
PHEC80R-R21	40/ROW X 2 ROWS	64.42	58.42	59.01	53.01	49.53
PHEC100R-R21	50/ROW X 2 ROWS	77.12	71.12	71.71	65.71	62.23
PHEC120R-R21	60/ROW X 2 ROWS	89.82	83.82	84.41	78.41	74.93

CONTACT PLATING TABLE

(THICKNESS: μm)

CONTACT AREA	REMAINDER
GOLD 0.25 MIN. OVER NICKEL 3.2	SOLDER OVER NICKEL

SCALE

DIM. IN mm

MATERIAL

DESIGNED

DRAWN

CHECKED

APPROVED

DATE

PRINTED CIRCUIT CONNECTOR

CAT. NO.

PHEC...R-R21

DRAWING NO.

JSC 90738

REV

BURNDY JAPAN, Ltd.

DRAWING NO.
JSC 90738

REV.	DATE	DESCRIPTION	CKD
3	92-8-11	30,34,50,68 POSITIONS ADDED.	W. J.
2	90-6-8	EC 7866	No
1	90-4-20	EC 7837	No

REFERENCE

EC-PHEC 02