



Wiha. Premium Tools
for Professionals.

Wiha T-Handle, Flag and Key Handle.

The Wiha T-handle, flag and key handle demonstrate their strengths whenever loosening particularly tight screws and fastening screws with high torque values.

Mature handle concepts enable the use of the complete handle geometry so that it is used as a lever, offering optimum axial power transmission from the hand to the screw.

The handle design is such that the complete handle surface can be used, thus enabling optimum power transmission.



NEW: Now with handle colour-coding system:

-  Red: metric hex blades
-  Yellow: inch hex blades
-  Green: TORX® blades
-  Light green: TORX PLUS® blades

Wiha T-Handle.

The ergonomic handle shape permits powerful torque transmission from handle to blade to screw.


The injection moulded T-handle with angled ends permits a good transmission of force from handle to blade. Since the blades are exposed to a high load, Wiha only uses high-quality chrome-vanadium steels, which, with their through-hardened blades, demonstrate high resistance to wear.

Wiha Flag and Key Handles.

Screwdrivers with these two special handle shapes are always used whenever replacing indexable inserts on milling heads or when carrying out high-torque adjustment work.

Thanks to the flag or key area below the shaft, it is possible to tighten or loosen screws comfortably with a delicate movement.

The cylindrical shaft of the handle is then used to quickly turn the screw in or out.

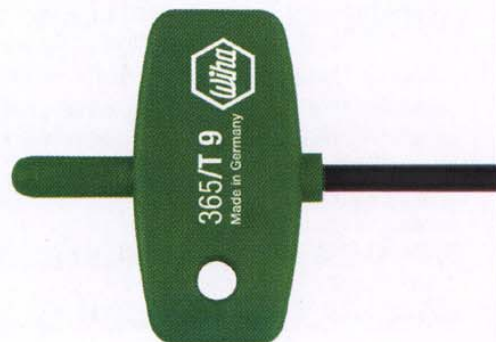



Wiha. Premium Tools
for Professionals.

Wiha T-Handle.

Hex Driver.



334 Hex driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, nickel plated.

Handle: Wiha T-handle.

Application: For high torque transfer with low effort.

Order-No.	Blade	Length	Weight	Blade	Length	Weight	Blade	Length	Weight
00904 5	2	100	-	126	80	26	10	832-108	
00905 2	2	200	-	226	80	26	10	832-110	
00906 9	2.5	100	-	126	80	26	10	832-121	
00907 6	2.5	200	-	226	80	26	10	832-133	
00908 3	3	100	-	126	80	26	10	832-145	
00909 0	3	150	-	176	80	26	10		
00910 6	3	200	-	226	80	26	10	832-157	
00911 3	3	350	5+	382	100	32	10		
00912 0	4	100	-	126	80	26	10	832-169	
00913 7	4	150	-	176	80	26	10		
00914 4	4	200	-	226	80	26	10		
00915 1	4	350	5+	382	100	32	10		
00916 8	5	100	-	132	100	32	10	832-182	
00917 5	5	150	-	182	100	32	10		
00918 2	5	200	-	232	100	32	10	832-194	
00919 9	5	350	-	382	100	32	10		
00920 5	5	450	7+	488	120	38	10		
00921 2	6	100	-	132	100	32	10	832-208	
00922 9	6	150	-	182	100	32	10		
00923 6	6	200	-	232	100	32	10	832-212	
00924 3	6	350	-	382	100	32	10		
00926 7	7	200	-	232	100	32	10		
00928 1	8	100	-	132	100	32	10		
00929 8	8	150	-	182	100	32	10		
00930 4	8	200	-	232	100	32	10		
00931 1	8	350	-	372	100	32	10		
00933 5	10	100	-	138	120	38	10		
00934 2	10	200	-	238	120	38	10	832-250	
00936 6	12	100	-	138	120	38	5		
00937 3	12	200	-	238	120	38	5		

+ Overlength with reinforced blade.

Hex Driver.



334 VB Hex driver set with T-handle.

Nickel-plated, in bench stand, 7-pcs.

Extra: Stable metal bench stand to stand or hang tip symbols printed to scale.

Order-No.	Blade	Length	Weight	Blade	Length	Weight	Blade	Length	Weight
00953 3	Bench stand equipped								
334	2x100	2,5x100	3x100	4x150					
	5x150	6x200	8x200						
00954 0	Bench stand empty								



334U Hex driver with T-handle.

With coated blade.

Blade: Chrome-vanadium steel, through hardened, nickel plated.

Handle: Wiha T-handle.

Application: For high torque transfer with low effort.

Extra: With coated blade.

Order-No.	Blade	Length	Weight	Blade	Length	Weight	Blade	Length	Weight
00940 3	2	100	126	80	26	10			
00941 0	2.5	100	126	80	26	10			
00942 7	3	100	126	80	26	10			
00944 1	4	100	126	80	26	10			
00945 8	4	150	176	80	26	10			
00948 9	5	150	182	100	32	10			
00951 9	6	150	182	100	32	10			