

RF AMPLIFIER

MODEL *TM9144*

Available as: TM9144, 4 Pin TO-8 (T4)
 TN9144, 4 Pin Surface Mount (SM3)
 FP9144, 4 Pin Flatpack (FP4)
 BX9144, Connectorized Housing (H1)
 PN9144, Reduced Size Surface Mount (SM11)

Features

- Low Noise Figure: 3.0 dB Typical
- Medium Output Power: +13 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 1000 MHz	10 - 1000 MHz
Gain (dB)	13	12 Min.
Power @ 1 dB Comp. (dBm)	+ 13	+ 11 Min.
Reverse Isolation (dB)	- 16	- 15 Max.
VSWR In	1.5:1	2.0:1 Max.
VSWR Out	1.5:1	2.0:1 Max.
Noise figure (dB)	3.0	4.0 Max.
Power Vdc	+15	+15
mA	30	35 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +40 (Typ.)
 Second Order Two Tone Intercept Point +35 (Typ.)
 Third Order Two Tone Intercept Point +25 (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 17 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts
 (1 Minute Max.)
 Maximum Peak Power 0.5 Watt
 (3 µsec Max.)

Typical Performance Data

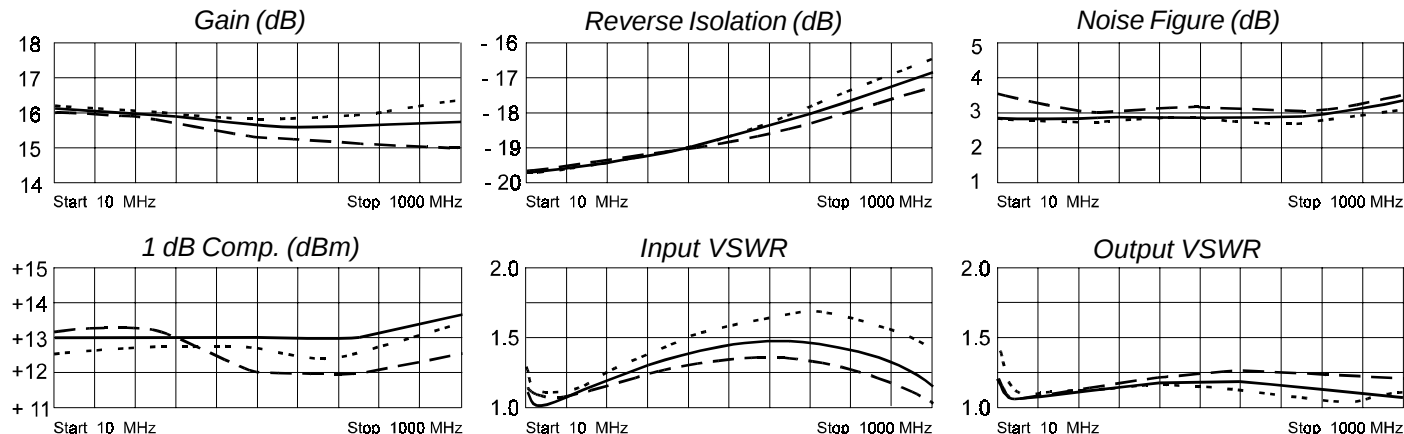

Legend ——— + 25 °C - - - - + 85 °C -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	.06	-83	6.40	-174	.1031	7	.09	91
100	.05	74	6.37	184	.1050	-2	.04	50
200	.10	63	6.25	147	.1064	-5	.06	33
300	.14	53	6.13	131	.1092	-9	.07	18
400	.18	41	6.02	115	.1115	-13	.08	1
500	.20	30	5.94	99	.1158	-17	.09	-17
600	.21	20	5.88	84	.1213	-22	.08	-36
700	.21	8	5.86	68	.1231	-27	.08	-52
800	.20	-6	5.91	51	.1305	-32	.07	-69
900	.16	-23	5.95	33	.1337	-39	.05	-79
1000	.09	-53	6.02	13	.1418	-45	.04	-63

Amplifonix

2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 • • • • FAX 215-464-4001 4/30/02