



Micro Commercial Components



Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

**1N4001  
THRU  
1N4007**

## Features

- Low Current Leakage and Low Cost
- Lead Free Finish/RoHS Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

## Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Typical Thermal Resistance: 35°C/W Junction to Case  
25°C/W Junction to Lead at 0.375"  
Lead Length P.C.B. Mounted

| MCC Catalog Number | Device Marking | Maximum Recurrent Peak Reverse Voltage | Maximum RMS Voltage | Maximum DC Blocking Voltage |
|--------------------|----------------|----------------------------------------|---------------------|-----------------------------|
| 1N4001             | 1N4001         | 50V                                    | 35V                 | 50V                         |
| 1N4002             | 1N4002         | 100V                                   | 70V                 | 100V                        |
| 1N4003             | 1N4003         | 200V                                   | 140V                | 200V                        |
| 1N4004             | 1N4004         | 400V                                   | 280V                | 400V                        |
| 1N4005             | 1N4005         | 600V                                   | 420V                | 600V                        |
| 1N4006             | 1N4006         | 800V                                   | 560V                | 800V                        |
| 1N4007             | 1N4007         | 1000V                                  | 700V                | 1000V                       |

## Electrical Characteristics @ 25°C Unless Otherwise Specified


|                                                         |             |                                       |                                                              |
|---------------------------------------------------------|-------------|---------------------------------------|--------------------------------------------------------------|
| Average Forward Current                                 | $I_{F(AV)}$ | 1.0A                                  | $T_A = 75^\circ\text{C}$                                     |
| Peak Forward Surge Current                              | $I_{FSM}$   | 30A                                   | 8.3ms, half sine                                             |
| Maximum Instantaneous Forward Voltage                   | $V_F$       | 1.0V                                  | $I_{FM} = 1.0\text{A};$<br>$T_J = 25^\circ\text{C}^*$        |
| Maximum DC Reverse Current At Rated DC Blocking Voltage | $I_R$       | 5.0 $\mu\text{A}$<br>50 $\mu\text{A}$ | $T_J = 25^\circ\text{C}$<br>$T_J = 125^\circ\text{C}$        |
| Typical Junction Capacitance                            | $C_J$       | 15pF                                  | Measured at 1.0MHz, $V_R=4.0\text{V}$                        |
| Maximum Reverse Recovery Time                           | $T_{rr}$    | 2.0 $\mu\text{s}$                     | $I_F=0.5\text{A}, I_R=1.0\text{A},$<br>$I_{rr}=0.25\text{A}$ |
| Rating for fusing                                       | $I^2t$      | 3.7A <sup>2</sup> s                   | $t < 8.3\text{ms}$                                           |

\*Pulse test: Pulse width 300  $\mu\text{sec}$ , Duty cycle 2%

Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7.

**1 Amp Rectifier  
50 - 1000 Volts**

DO-41

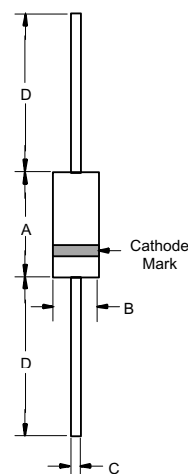

DIMENSIONS

| DIM | INCHES |      | MM    |      | NOTE |
|-----|--------|------|-------|------|------|
|     | MIN    | MAX  | MIN   | MAX  |      |
| A   | .166   | .205 | 4.10  | 5.20 |      |
| B   | .080   | .107 | 2.00  | 2.70 |      |
| C   | .028   | .034 | .70   | .90  |      |
| D   | 1.000  | —    | 25.40 | —    |      |

**www.mccsemi.com**

# 1N4001 thru 1N4007

Figure 1  
Typical Forward Characteristics

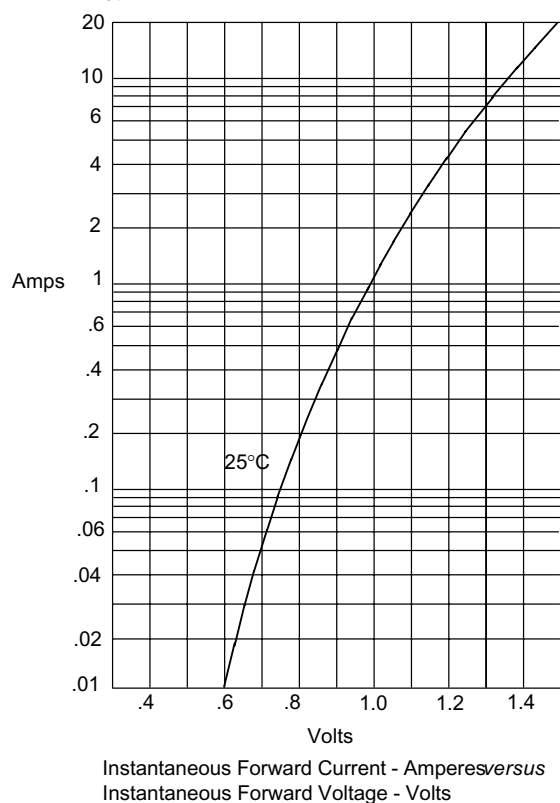


Figure 2  
Forward Derating Curve


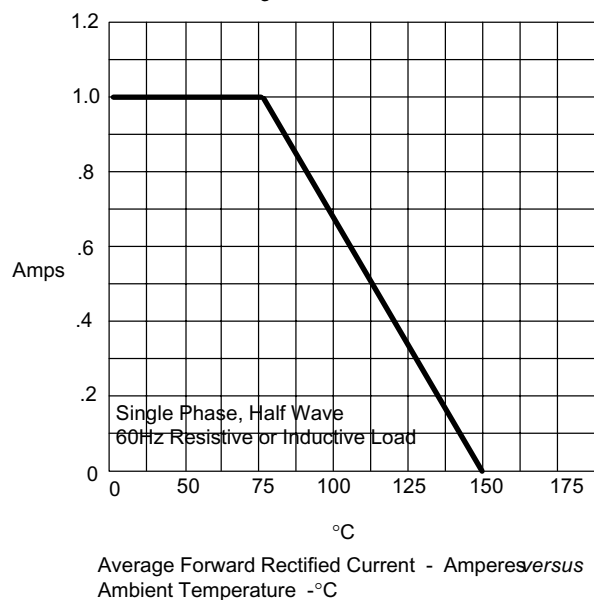


Figure 3  
Junction Capacitance




# 1N4001 thru 1N4007

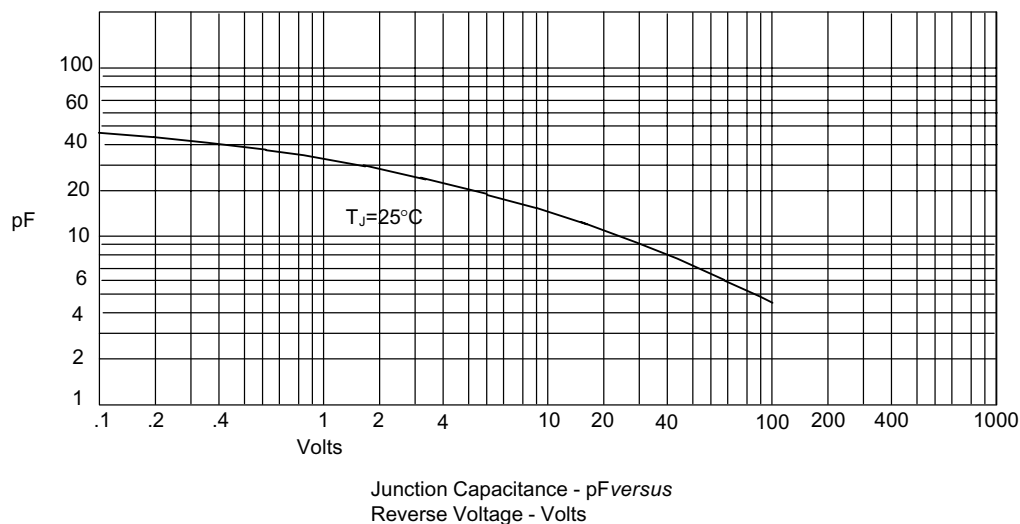


Micro Commercial Components

Figure 4  
Typical Reverse Characteristics

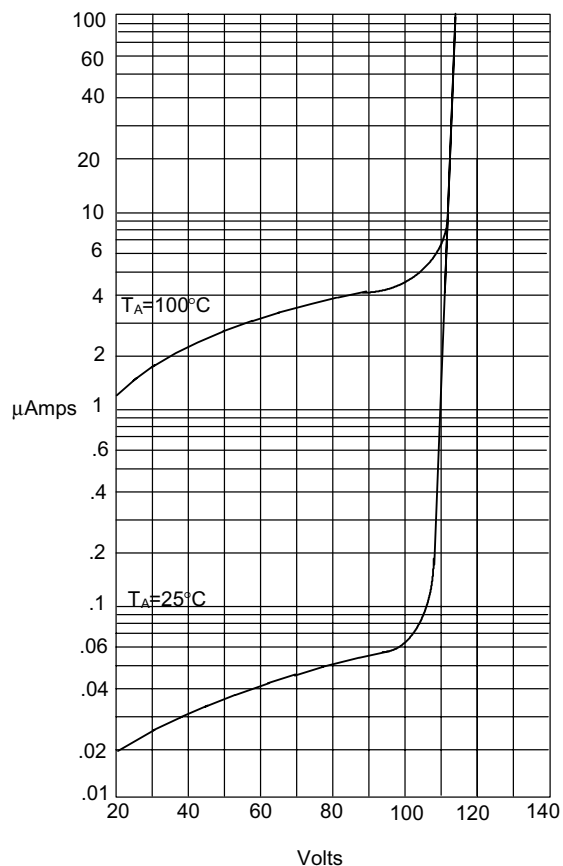

Instantaneous Reverse Leakage Current - MicroAmperes versus  
Percent Of Rated Peak Reverse Voltage - Volts

Figure 5  
Peak Forward Surge Current

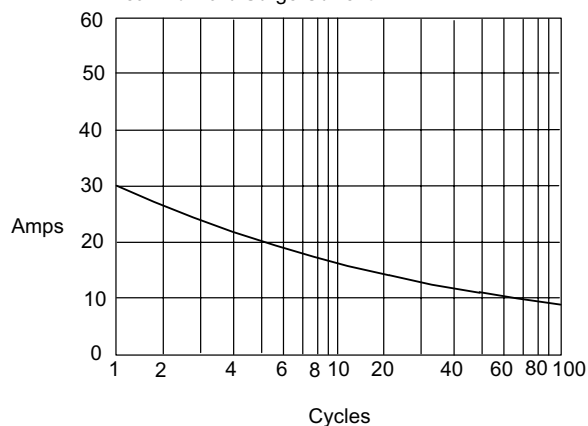

Peak Forward Surge Current - Amperes versus  
Number Of Cycles At 60Hz - Cycles



Micro Commercial Components

## Ordering Information :

| Device         | Packing                      |
|----------------|------------------------------|
| Part Number-TP | Tape&Reel: 5Kpcs/Reel        |
| Part Number-AP | Ammo Packing: 5Kpcs/Ammo Box |
| Part Number-BP | Bulk: 50Kpcs/Carton          |

### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

[www.mccsemi.com](http://www.mccsemi.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Micro Commercial Components (MCC):

[1N4001-T](#) [1N4002-T](#) [1N4003-T](#) [1N4004-T](#) [1N4005-T](#) [1N4006-T](#) [1N4007-T](#) [1N4006-TP](#) [1N4005-TP](#) [1N4007-TP](#)  
[1N4002-TP](#) [1N4001-TP](#) [1N4004-TP](#) [1N4003-TP](#)