

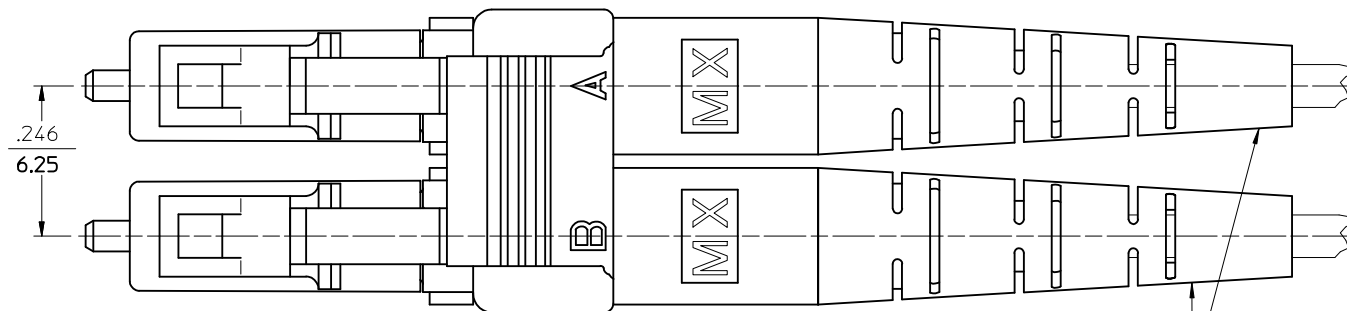


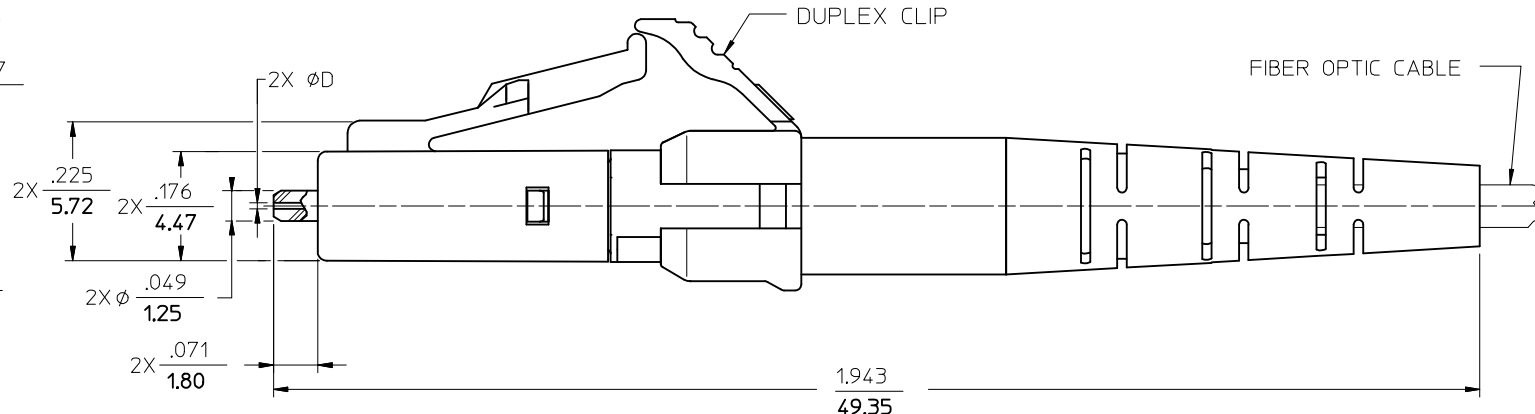

BOOTS

(DUST CAPS NOT SHOWN)

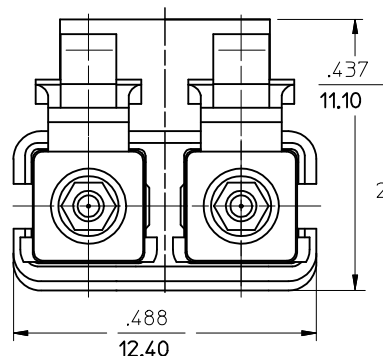

NOTES:

1. DUPLEX CLIP AND BOOTS SHOULD BE ASSEMBLED AFTER POLISHING OPERATION.
- *2. P/N 106025-3320 AND 106025-5320 ARE BULK PACKED IN QUANTITIES OF 100 PCS.

ENTER DESCRIPTION EC NO: MF2013-0203 DRAWN BY: DRWANKPEVZNER CHKD: 2012/10/09 APPR: LGUMIN REV		QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 5:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY PGIBLIN	DATE 2005/09/06	TITLE LC DUPLEX CONNECTOR				
						CHECKED BY	DATE					
						APPROVED BY		DATE	molex			
			MATERIAL NO.		DOCUMENT NO.							
B1	DESCRIPTION		ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-1060DD-DDD0					1 OF 1
					SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

