


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	Y2	REVISED PER ECR-16-006270	07MAY2016	BW	RS

- 1



PLATED WITH .000030 GOLD, OVER .000050 NICKEL UNDERPLATE.
- 2

GOLD OVER NICKEL ON ENTIRE STAMPING; .000030 GOLD MINIMUM AT POINT OF MEASUREMENT IN CONTACT AREA, GOLD FLASH MINIMUM IN WIRE BARREL.
- 3




INSULATION RANGE : $\varnothing$.130—.200

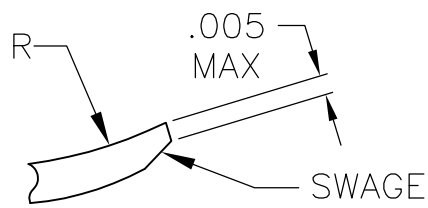

DETAIL D
SCALE 20:1

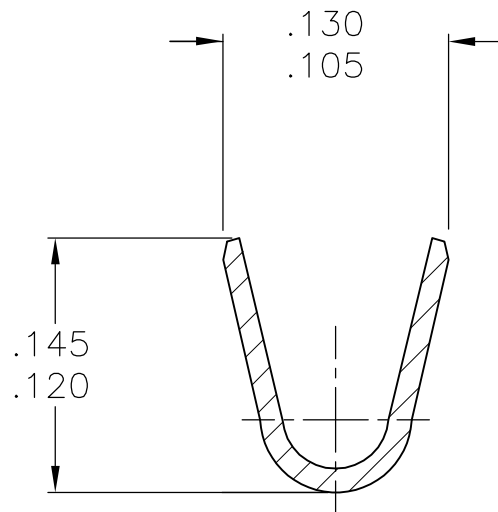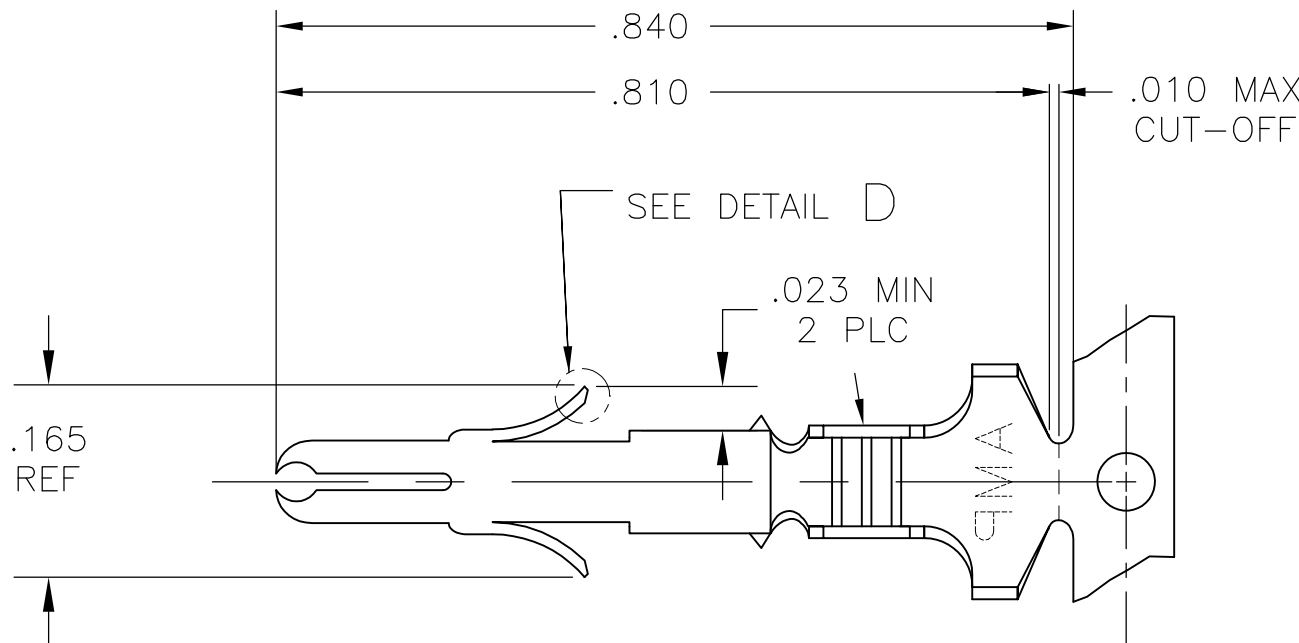

SECTION A—A
SCALE 10:1

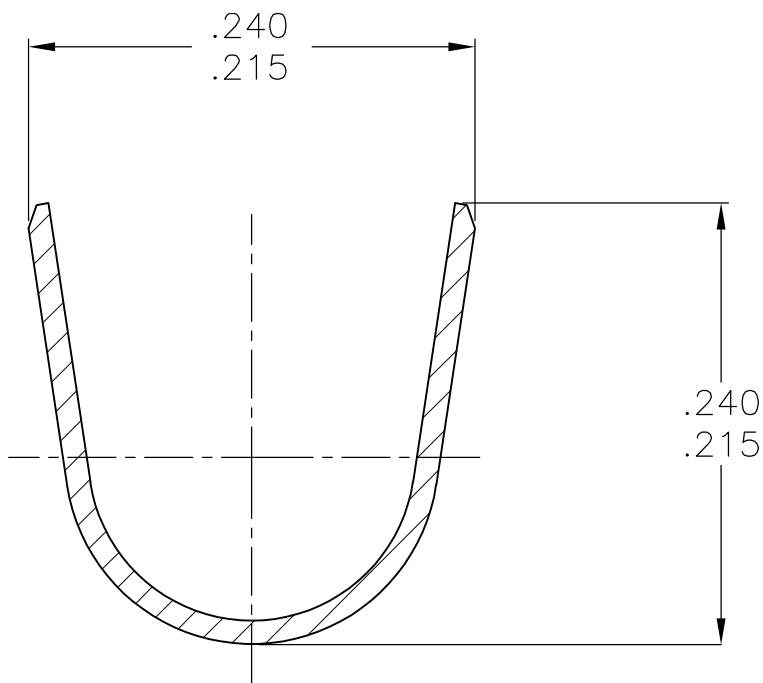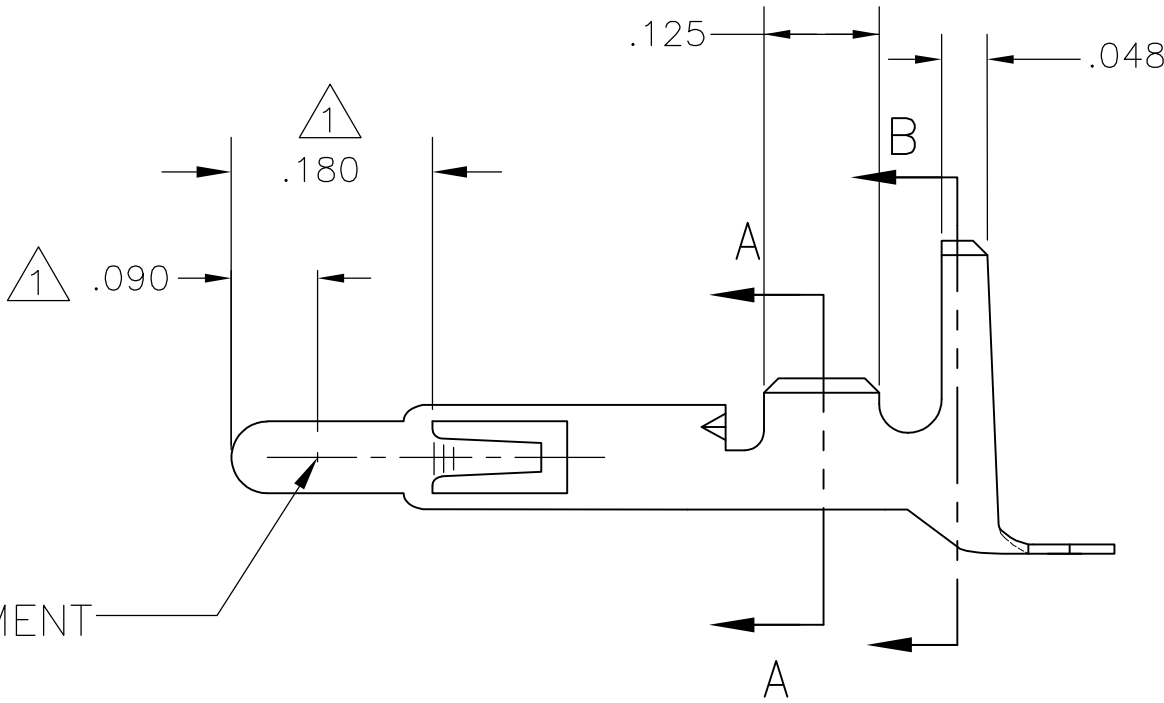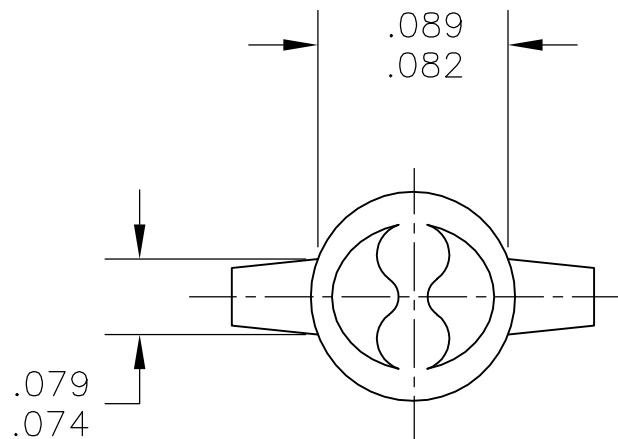

SECTION B—B
SCALE 10:1

350707-7	.012 BRASS	GOLD 1	350700-7
—	.012 PH BR2	PRE-TIN	350700-3
350707-2	.012 BRASS	GOLD 2	350700-2
350707-1		PRE-TIN	350700-1
LOOSE PIECE (REF)	MATERIAL	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BASVESH WARAD 31MAR2016	TE Connectivity	
		CHK WICKES, EVAN 31MAR2016		
WIRE RANGE 20-14 AWG	DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .015 4 PLC ± - ANGLES ± -	NAME SPLIT PIN, UNIVERSAL MATE-N-LOK —	
INSULATION RANGE 3	MATERIAL —	FINISH —	SIZE A1	CAGE CODE 00779
	CUSTOMER DRAWING		DRAWING NO 350700	RESTRICTED TO —
		SCALE 5:1	SHEET 1 OF 1	REV Y2